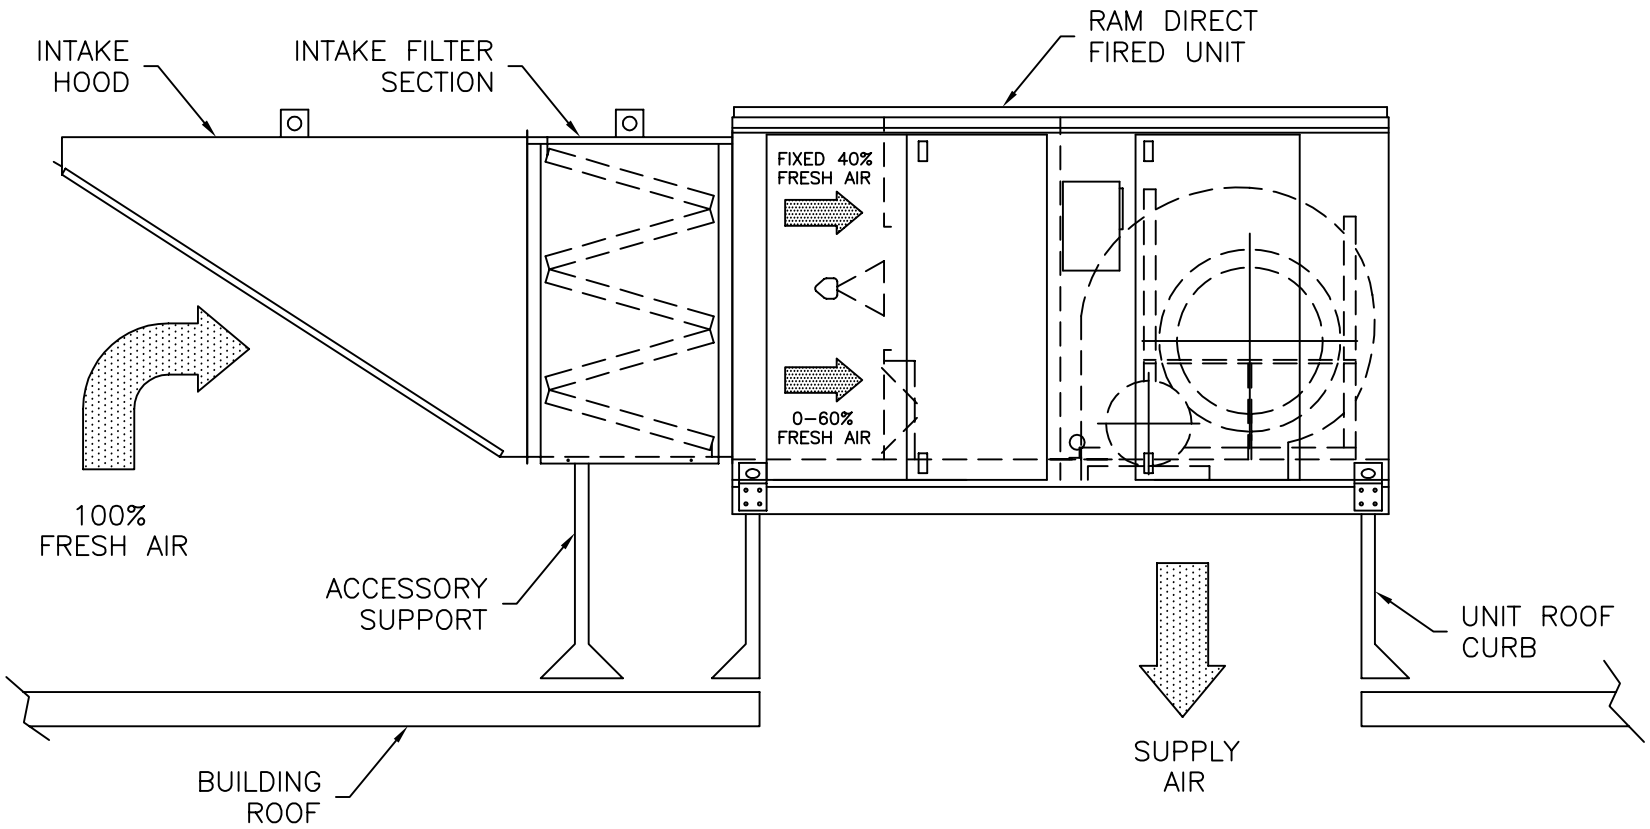

NOTES:

- –THE BURNER PROFILE DESIGN SHOWN ABOVE IS FOR VARIABLE AIR VOLUME UNITS WITH MODULATING CFM FROM 40% TO 100% FRESH AIR
- –TWO SPEED 18/9 UNITS ARE SIZED FOR LOW SPEED AT 40% FRESH AIR AND HIGH SPEED AT 100% FRESH AIR
- –TWO SPEED 18/12 ARE SIZED FOR LOW SPEED AT 60% FRESH AIR AND HIGH SPEED AT 100% FRESH AIR

DRAWING/PART NUMBER 2VAVRAM

TOLERANCES: 2 PLCS ±.03, 3 PLCS ±.015

REV | REVISION DESCRIPTION | ECN NO | DWG | DATE

TITLE: RAM 2-SPEED/VAV DIRECT FIRED MAKE-UP AIR BASIC INSTALLATION DRAWING

DRAWN BY TKL DATE 11/6/00

APPROVED BY DATE

RUPP AIR MANAGEMENT SYSTEMS

MATERIAL

SCALE 1 to 1

DO NOT SCALE DRAWING USE DIMENSIONS SHOWN
ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED

DRAWING/PART NUMBER 2VAVRAM