

1" NPT CONNECTION FOR SS PITCHED DRAIN PAN

COIL ACCESS DOOR

SERVICE DISCONNECT SWITCH BLOWER/MOTOR ACCESS DOOR

CONDENSER DISCONNECT DIRECT FIRED MODULE DIM 'W'

CONDENSER 2


FILTER ACCESS DOOR

SLOPED FILTER INTAKE

SUPPORT LEG

CONDENSER INFORMATION

MODEL	WEIGHT*	#1	#2	CC	DD	EE
2 TON-G10 119 LBS	2 TON	N/A	26-5/16	56-1/16	52-3/8	
3 TON-G10 134 LBS	3 TON	N/A	33-5/16	63-1/16	59-3/8	
5 TON-G10 253 LBS	3 TON	N/A	33-5/16	63-1/16	59-3/8	
5 TON-G10 302 LBS	2.5 TON	2.5 TON	32-13/16	62-9/16	58-7/8	
5 TON-G15 197 LBS	5 TON	N/A	32-13/16	62-9/16	58-7/8	
7.5 TON-G15 348 LBS	2.5 TON	5 TON	32-13/16	62-9/16	58-7/8	
8 TON-G15 331 LBS	3 TON	5 TON	33-5/16	71-11/16	68	
10 TON-G18 394 LBS	3 TON	5 TON	32-13/16	69-9/16	65-7/8	
10 TON-G18 394 LBS	5 TON	5 TON	32-13/16	76-3/16	70-7/8	
10 TON-G20 394 LBS	5 TON	5 TON	32-13/16	97-3/16	91-15/16	

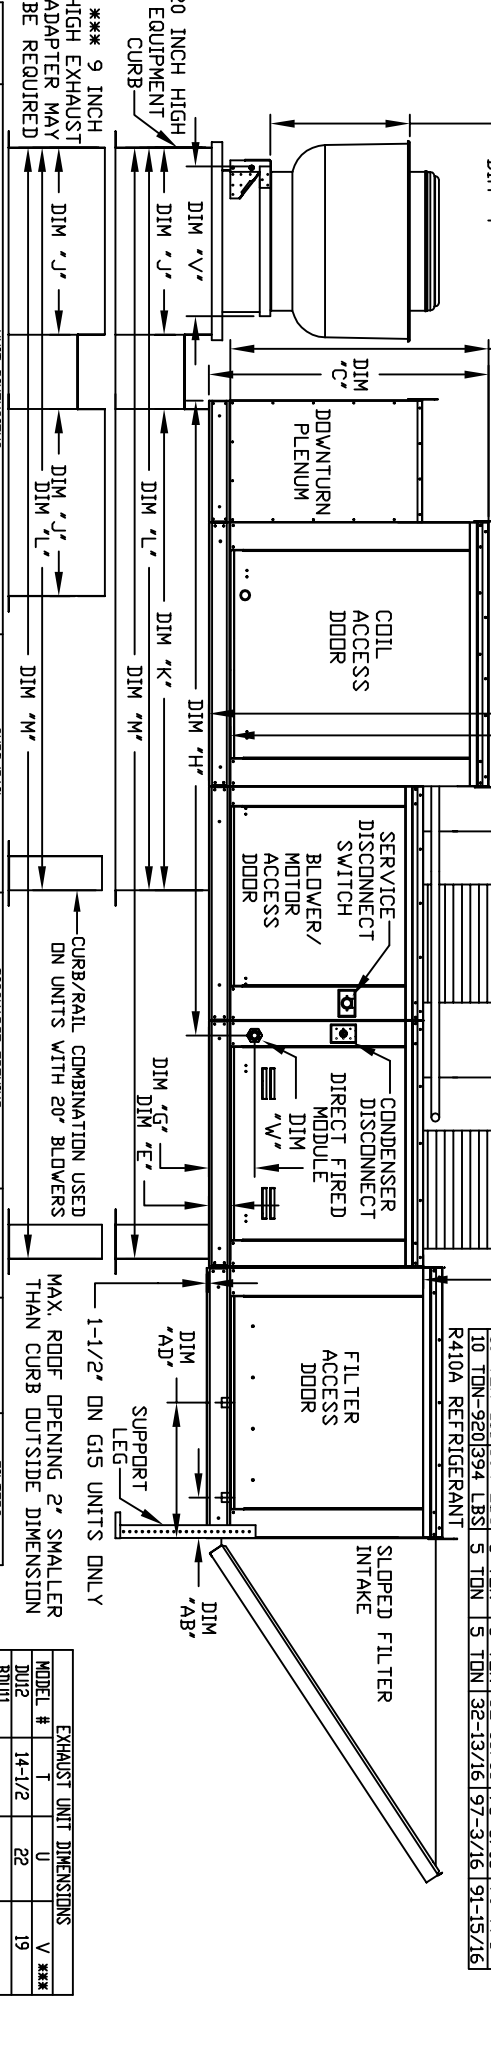


MODEL	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	AA	AB	AC	AD	EXHAUST UNIT DIMENSIONS			
D1250-G10	16'-1/4	39'-3/8	42'-3/4	39	3'-3/4	53'-5/8	7'-13/16	95'-7/16	21	71	106	166'-5/8	3'-9/16	13'-7/8	36'-13/16	11'-1/2	4'-1/2	6'-1/4	18	16	20'x25'x2' (3)	18-1/2	27-1/4	21
D1500-G10	16'-1/4	39'-3/8	42'-3/4	39	3'-3/4	53'-5/8	7'-13/16	95'-7/16	21	71	106	166'-5/8	3'-9/16	13'-7/8	36'-13/16	11'-1/2	4'-1/2	6'-1/4	18	16	20'x25'x2' (3)	18-1/2	27-1/4	21
D1750-G10	18'	49'-3/8	47'-3/4	44	3'-3/4	51'-5/8	7'-13/16	109'-7/16	31	79	124	196'-5/8	4'-5/16	22'-3/8	46'-9/16	18	4'-1/2	5'-3/4	20	19	16'x20'x2' (6)	21-1/2	30-1/4	21
D1500-G15	18'	49'-3/8	47'-3/4	44	3'-3/4	51'-5/8	7'-13/16	109'-7/16	31	79	124	196'-5/8	4'-5/16	22'-3/8	46'-9/16	18	4'-1/2	5'-3/4	20	19	16'x20'x2' (6)	21-1/2	30-1/4	21
D1750-G15	18'	49'-3/8	47'-3/4	44	3'-3/4	51'-5/8	7'-13/16	109'-7/16	31	79	124	196'-5/8	4'-5/16	22'-3/8	46'-9/16	18	4'-1/2	5'-3/4	20	19	16'x20'x2' (6)	21-1/2	30-1/4	21
D1500-G18	18'-1/4	54'-3/8	51'-1/8	51-1/8	5'-1/4	76'-3/8	9'-1/2	114'-7/16	33	84	133	199'-5/8	6'-5/16	22'-3/8	49'-1/2	18	4'-1/2	5'-3/4	23-1/2	17-1/2	16'x20'x2' (10)	23-1/2	39-3/8	28
D1750-G18	18'-1/4	54'-3/8	51'-1/8	51-1/8	5'-1/4	76'-3/8	9'-1/2	114'-7/16	33	84	133	199'-5/8	6'-5/16	22'-3/8	49'-1/2	18	4'-1/2	5'-3/4	23-1/2	17-1/2	16'x20'x2' (10)	23-1/2	39-3/8	28
D1000-G18	238-9/16	60'-7/16	64'-3/8	59-1/8	5'-1/4	71-3/8	13-9/16	151	42	115-3/16	171-3/16	255-7/8	5'-1/4	31-1/2	56-13/16	23-1/2	4-1/2	5-3/4	28-7/8	17-1/2	20'x25'x2' (8)	30-5/8	43-3/8	33
D1500-G20	238-9/16	60'-7/16	64'-3/8	59-1/8	5'-1/4	71-3/8	13-9/16	151	42	115-3/16	171-3/16	255-7/8	5'-1/4	31-1/2	56-13/16	23-1/2	4-1/2	5-3/4	28-7/8	17-1/2	20'x25'x2' (8)	30-5/8	43-3/8	33

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MAXIMUM CONDENSING UNIT WEIGHT TO WEIGHT IN TABLE ABOVE

MAX. EVAP. WATER PRESSURE = 50 PSI @ 70 DEG. F

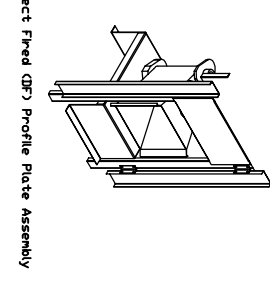

Direct Fired Profile Plate Assembly