


MODULAR OUTDOOR DOWN DISCHARGE ELECTRIC HEATER PACKAGED UNIT WITH COOLING, LPD EVAPORATIVE COOLER INTAKE AND INTAKE HOOD

THE PRICE IS VARYING DUE TO MARKET
 REV 1/18 09/13/2016

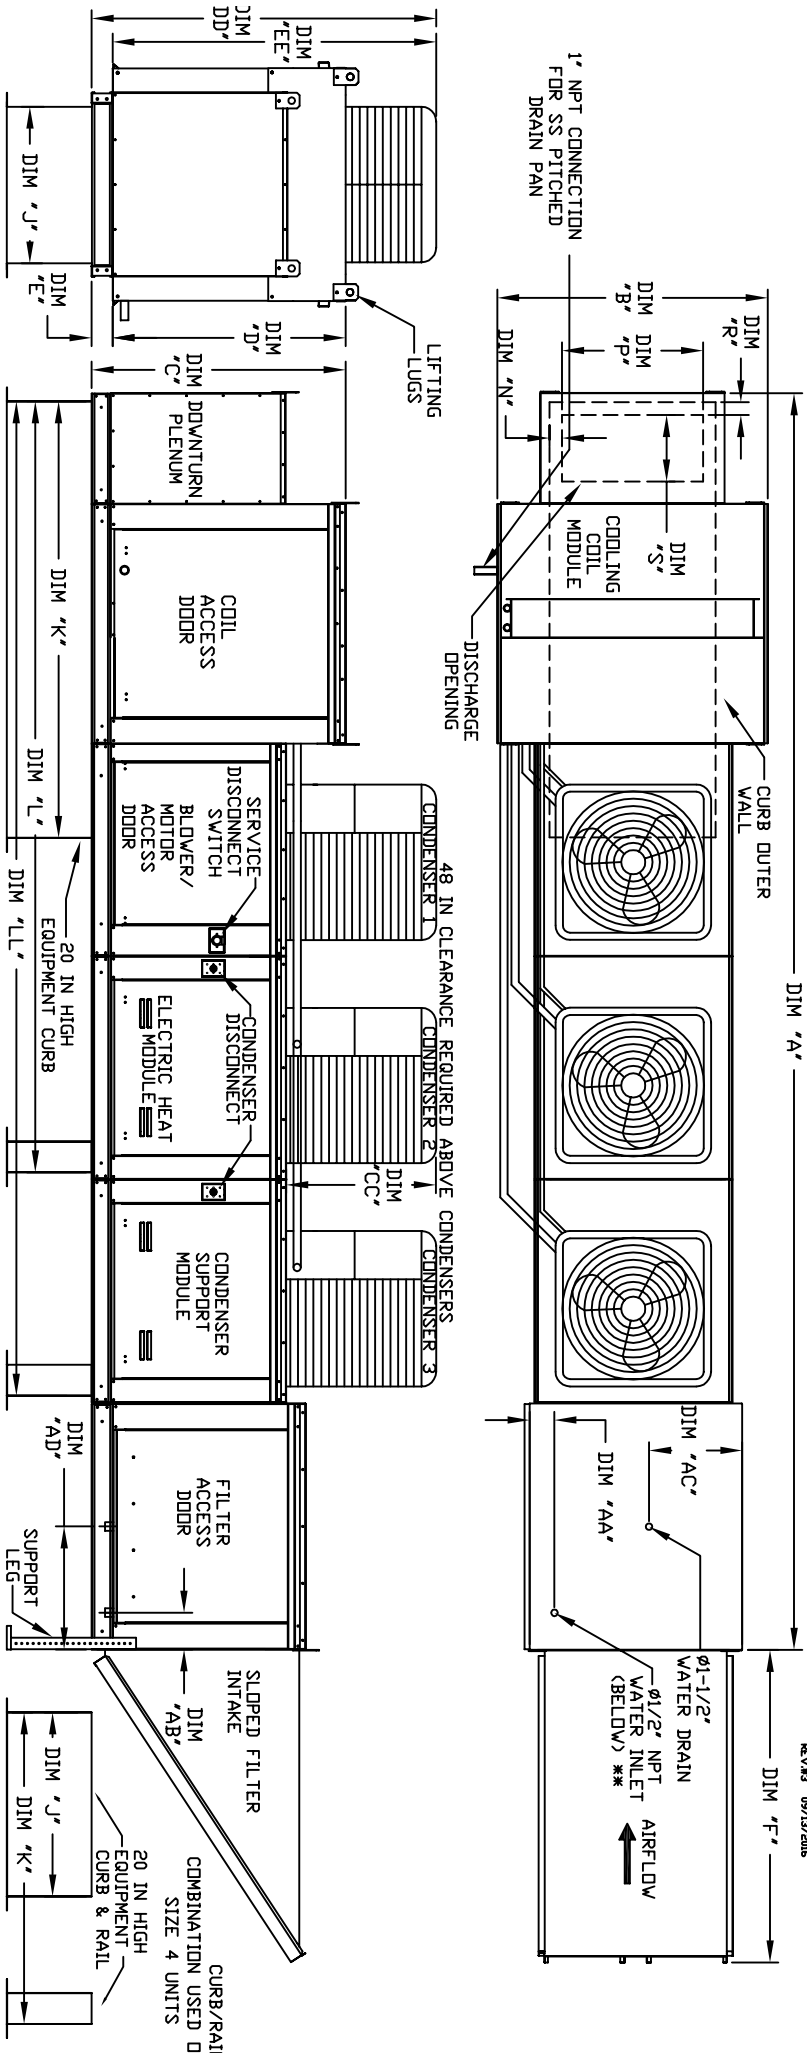

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MAX. ROOF OPENING 2" SMALLER THAN CURB OUTSIDE DIMENSION

MODEL	UNIT DIMENSIONS										CURB/RAIL					DISCHARGE OPENING					WATER INLET DRAIN OPENING					INTAKE FILTER SIZE & QTY		MAX. FILTER VELOCITY		
	A	B	C	D	E	F	J	K	L	M	N	P	R	S	AA	AB	AC	AD	AE	AF	AG	AH	AI	AL	AM	AN	AO	AP	AR	AS
E3	23-5/8	54-3/8	56-3/8	51-1/8	5-1/4	76-3/8	35	84	150-5/8	192-7/8	6-5/16	22-3/8	1-1/2	18	4-1/2	5-3/4	23-1/2	17-1/2	16-5/8	20-x25-x2"	10	10	457 FPM	457 FPM						
E4	292-7/8	60-7/16	64-3/8	59-1/8	5-1/4	71-3/8	42	115-3/16	199-13/16	254-1/8	5-1/4	31-1/2	1-3/16	23-1/2	4-1/2	5-3/4	28-7/8	17-1/2	16-5/8	20-x25-x2"	10	10	565 FPM	565 FPM						

UNIT INFORMATION

MODEL	TONNAGE RANGE	TIT. WEIGHT	MEDIA SIZE & QTY	VEL. @ MAX. CFM	NOZZLES	MAX. FLOW RATE
E3	15 Ton	15 Ton	2050 LBS	38' x 43' x 12'	705 FPM	1015 GPH
E4	15 Ton	15 Ton	3020 LBS	45' x 54' x 12'	770 FPM	1215 GPH

MAX. CONDENSING UNIT WEIGHT TO WEIGHT IN TABLE ABOVE *** MAX EVAP WATER PRESSURE = 50 PSI @ 70 DEG F

CONDENSER INFORMATION

MODEL	WEIGHT #	#1	#2	#3	CC	DD	EE
15 TON-3	591 LBS	5 TON	5 TON	5 TON	32-13/16	76-3/16	70-7/8
15 TON-4	1591 LBS	5 TON	5 TON	5 TON	32-13/16	97-3/16	91-5/16