



MODULAR OUTDOOR SIDE DISCHARGE DIRECT FIRED RECIRCULATING HEATER WITH COOLING, LPD EVAPORATIVE COOLER INTAKE AND INTAKE HOOD

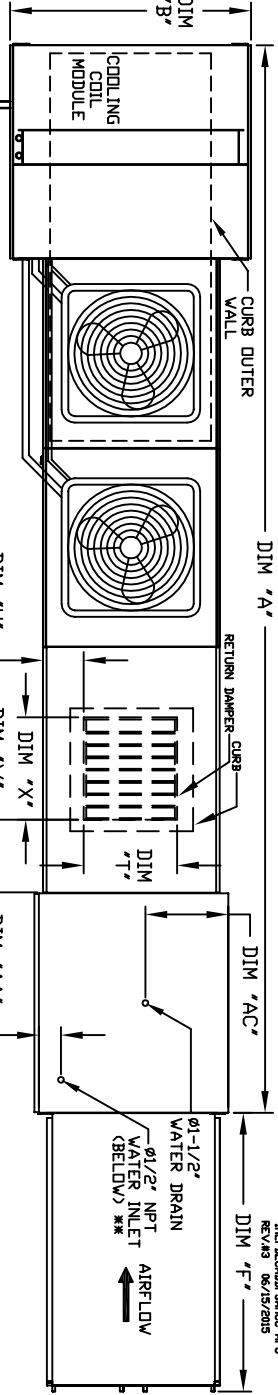

MODEL	WEIGHT*	TONNAGE		CC	DD	EE
		#1	#2			
2 TON-G10 119 LBS	2 TON	N/A	26-5/16	56-1/16	53-3/8	
3 TON-G10 134 LBS	3 TON	N/A	33-5/16	63-1/16	59-3/8	
5 TON-G10 203 LBS	5 TON	3 TON	33-5/16	63-1/16	59-3/8	
5 TON-G10 302 LBS	5 TON	2.5 TON	32-13/16	62-9/16	58-7/8	
5 TON-G15 197 LBS	5 TON	N/A	32-13/16	62-9/16	58-7/8	
7/5 TON-G15 348 LBS	2.5 TON	N/A	32-13/16	62-9/16	58-7/8	
8 TON-G15 331 LBS	3 TON	5 TON	33-5/16	71-1/16	68	
10 TON-G15 394 LBS	5 TON	5 TON	32-13/16	69-9/16	65-7/8	
10 TON-G18 394 LBS	5 TON	5 TON	32-13/16	76-3/16	70-7/8	
10 TON-920 394 LBS	5 TON	5 TON	32-13/16	97-3/16	91-15/16	

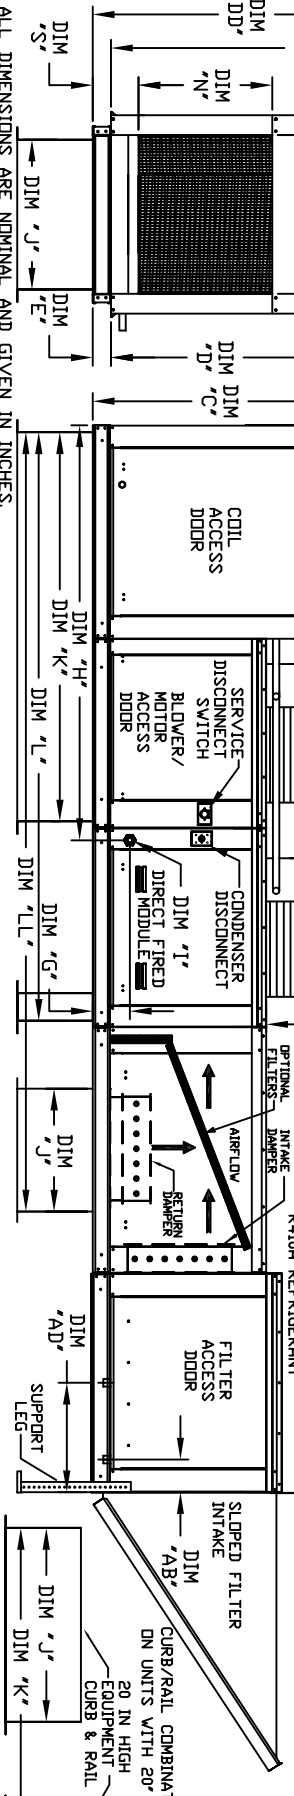

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	V	X	AA	AB	AC	AD	AE	AF	AG	AH	AI	AJ	AK
D250-G10 191-1/8	39	3-3/8	42-3/4	39	3-3/4	53-5/8	87-13/16	77-1/16	21	71	113-1/4	144-1/16	17-1/2	16	11	5-3/4	14	8	14	12-1/2	18	4-1/2	6-1/4	18	16	20"x25"x2"	(2)				
D500-G10 191-1/8	39	3-3/8	42-3/4	39	3-3/4	53-5/8	87-13/16	77-1/16	21	71	113-1/4	144-1/16	17-1/2	16	11	5-3/4	14	8	14	12-1/2	18	4-1/2	6-1/4	18	16	20"x25"x2"	(2)				
D1000-G10 205-1/8	48	4-3/8	47-3/4	44	3-3/4	57-1/8	91-1/8	85-1/8	31	79	121-1/4	157-1/16	29-3/4	12-5/8	11-1/2	5-3/4	22-3/4	8	11	7-1/2	24	4-1/2	6-1/4	20	16	20"x25"x2"	(2)				
D1500-G10 205-1/8	48	4-3/8	47-3/4	44	3-3/4	57-1/8	91-1/8	85-1/8	31	79	121-1/4	157-1/16	29-3/4	12-5/8	11-1/2	5-3/4	22-3/4	8	11	7-1/2	24	4-1/2	6-1/4	20	16	20"x25"x2"	(2)				
D1500-G18 207-1/4	54	5-3/8	56-3/8	51-1/8	4-1/8	61-1/8	95-1/8	89-1/8	35	84	126-1/4	165-1/16	29-5/8	12-5/8	11-1/2	5-3/4	23-1/2	8	7	4-1/2	30	4-1/2	6-1/4	20	16	20"x25"x2"	(1)				
D1500-G18 207-1/4	54	5-3/8	56-3/8	51-1/8	4-1/8	61-1/8	95-1/8	89-1/8	35	84	126-1/4	165-1/16	29-5/8	12-5/8	11-1/2	5-3/4	23-1/2	8	7	4-1/2	30	4-1/2	6-1/4	20	16	20"x25"x2"	(1)				
D1000-920 244	60	6-3/8	64-3/8	59-1/8	5-1/4	71-3/8	103-9/16	120-5/8	42	84	126-1/4	165-1/16	29-5/8	12-5/8	11-1/2	5-3/4	23-1/2	10	7	4-1/2	30	4-1/2	6-1/4	20	16	20"x25"x2"	(1)				
D1500-920 244	60	6-3/8	64-3/8	59-1/8	5-1/4	71-3/8	103-9/16	120-5/8	42	84	126-1/4	165-1/16	29-5/8	12-5/8	11-1/2	5-3/4	23-1/2	10	7	4-1/2	30	4-1/2	6-1/4	20	16	20"x25"x2"	(1)				
D1500-920 30"	45.8	4.58	137.5	137.5	5	17.4	119.9	120.5	42	115	155.3	176.2	36.3	34	12	7.3	33	10	11	8	36	4-1/2	5-3/4	28	17	20"x25"x2"	(2)				

OPTIONAL MIXING BOX FILTERS

MODEL	WEIGHT*	TONNAGE	CC	DD	EE
2 TON-G10 119 LBS	2 TON	N/A	26-5/16	56-1/16	53-3/8
3 TON-G10 134 LBS	3 TON	N/A	33-5/16	63-1/16	59-3/8
5 TON-G10 203 LBS	5 TON	3 TON	33-5/16	63-1/16	59-3/8
5 TON-G10 302 LBS	5 TON	2.5 TON	32-13/16	62-9/16	58-7/8
5 TON-G15 197 LBS	5 TON	N/A	32-13/16	62-9/16	58-7/8
7/5 TON-G15 348 LBS	2.5 TON	N/A	32-13/16	62-9/16	58-7/8
8 TON-G15 331 LBS	3 TON	5 TON	33-5/16	71-1/16	68
10 TON-G15 394 LBS	5 TON	5 TON	32-13/16	69-9/16	65-7/8
10 TON-G18 394 LBS	5 TON	5 TON	32-13/16	76-3/16	70-7/8
10 TON-920 394 LBS	5 TON	5 TON	32-13/16	97-3/16	91-15/16

General Construction: Profile plates shall be formed from G90 galvanized steel. Profile plates shall be mounted along the same plane as the discharge of the burner. Design shall incorporate properly torqued, permanently mounted spring hinges.