


MODULAR OUTDOOR DOWN DISCHARGE ELECTRIC HEATER-ROOF TOP PACKAGE WITH COOLING, LPD EVAPORATIVE COOLER INTAKE AND INTAKE HOOD

HLPRECHEMCDRTRP-APU-15  
REV A2 06/15/2015

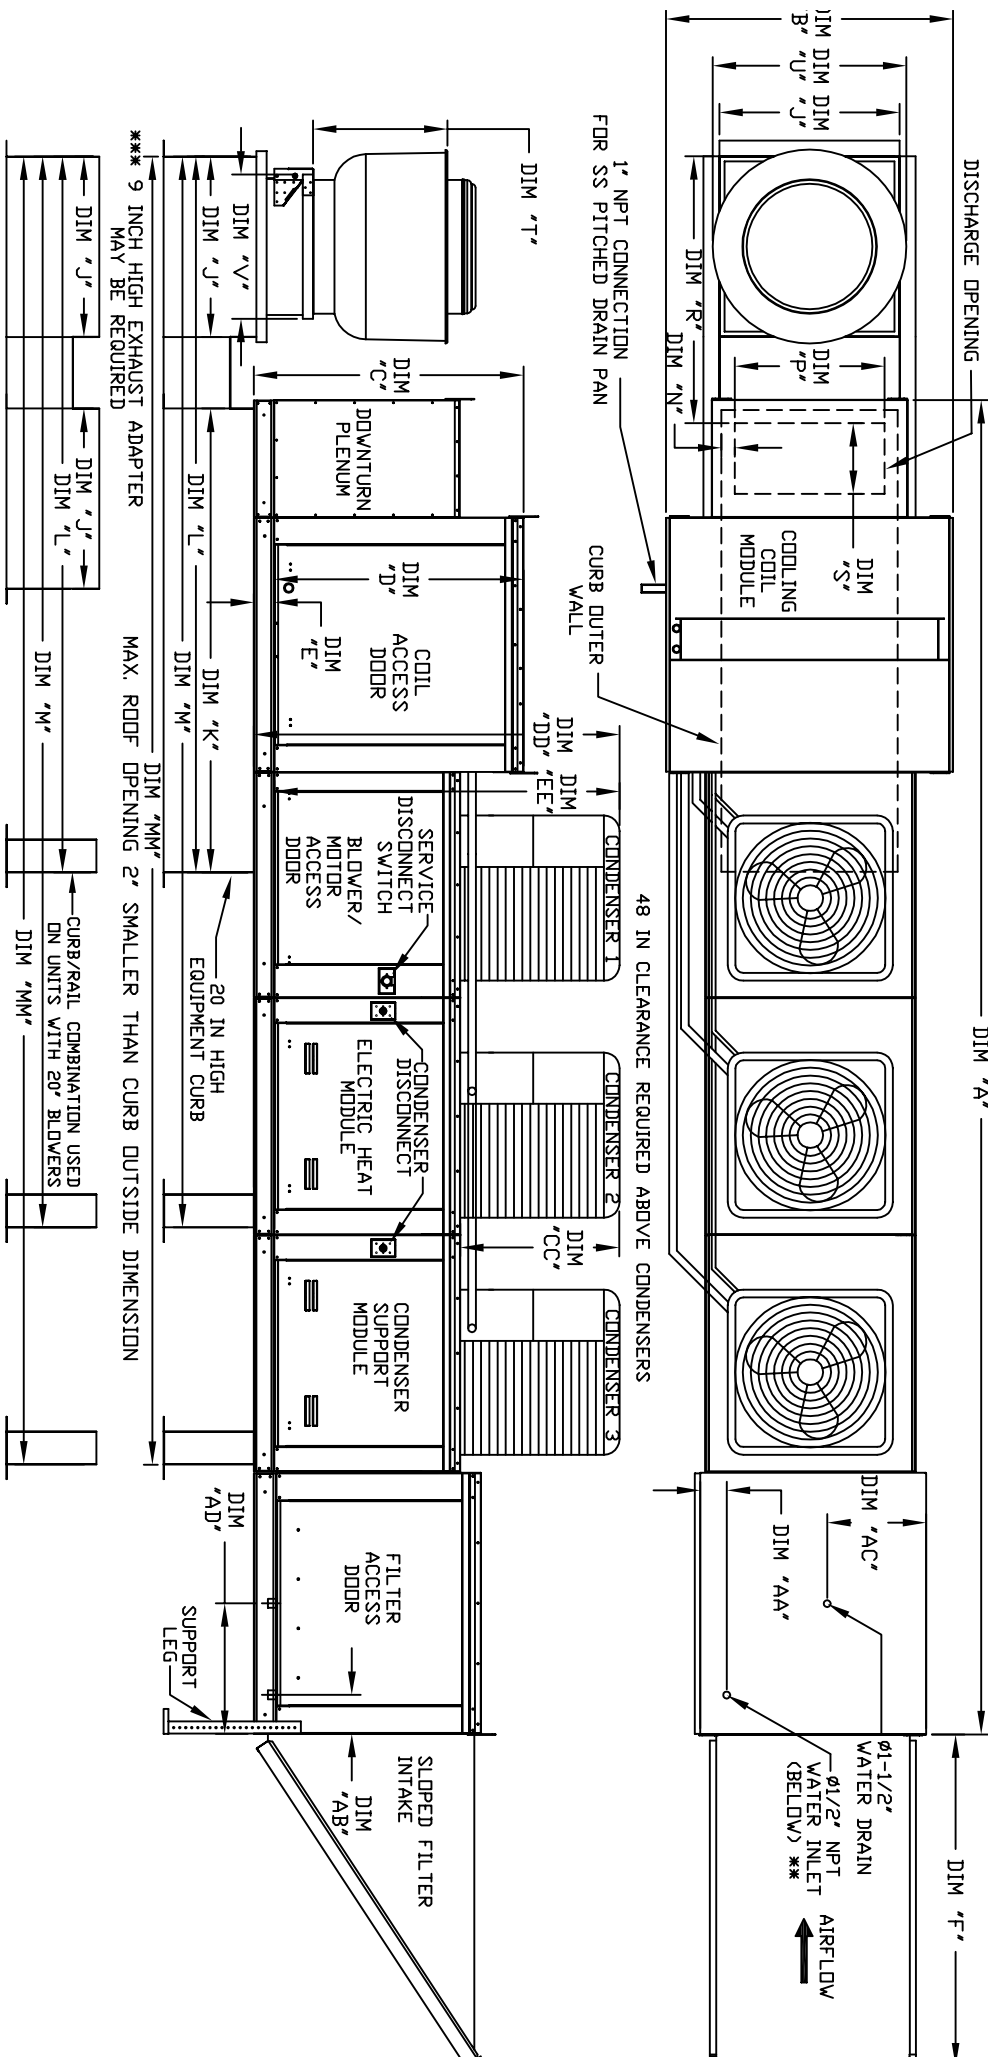

\*\*\* 9 INCH HIGH EXHAUST ADAPTER MAY BE REQUIRED

MAX. ROOF OPENING 2' SMALLER THAN CURB OUTSIDE DIMENSION

20 IN HIGH EQUIPMENT CURB

MODEL #	T	U	V ***
BDU2	14-1/2	22	19
BDU11			
BDU3	18-1/2	27-1/4	21
BDU5			
BDU9	21-1/2	30-1/4	21
BDU18	23-1/2	39-3/8	28
BDU20	29-1/2	38-7/8	28
BDU24	30-5/8	43-3/8	33
BDU30	33-1/2	52-3/4	40

MODEL	A	B	C	D	E	F	J	K	M	N	P	R	S	AA	AB	AC	AD	INTAKE FILTER SIZE & QTY	MAX. FILTER VELOCITY	
E3-G18	231-5/8	54-3/8	56-3/8	51-1/8	5-1/4	76-3/8	35	84	133	199-5/8	241-7/8	22-3/8	49-1/2	18	4-1/2	5-3/4	23-1/2	17-1/2	16"x20"x2" (10)	88000 CFM = 457 FPM
E4-920	292-7/8	60-7/16	64-3/8	59-1/8	5-1/4	71-3/8	42	115-3/16	171-3/16	255-13/16	310-1/8	5-1/4	31-1/2	4-1/2	5-3/4	28-7/8	17-1/2	20"x25"x2" (8)	81300 CFM = 565 FPM	

UNIT INFORMATION: TONNAGE RANGE, CURB/RAIL, DISCHARGE OPENING, WATER INLET DRAIN OPENING, INTAKE FILTER SIZE & QTY, MAX. FILTER VELOCITY

MODEL	MIN.	MAX.	TOT. WEIGHT	MEDIA SIZE & QTY	VEL. & MAX. CFM	MAX. FLOW RATE
E3-G18	15 Ton	15 Ton	2650 LBS	38"x43"x12"	705 FPM	1015 GPH
E4-920	15 Ton	15 Ton	3020 LBS	45"x54"x12"	770 FPM	1216 GPH

\*\*\* ADD CONDENSING UNIT WEIGHT TO WEIGHT IN TABLE ABOVE \*\*\* MAX. EVAP. WATER PRESSURE = 50 PSI @ 70 DEG F

MODEL	WEIGHT #1	WEIGHT #2	WEIGHT #3	CC	DD	EE
15 TON-G18/591 LBS	5 TON	5 TON	5 TON	32-13/16	76-3/16	70-7/8
15 TON-920/591 LBS	5 TON	5 TON	5 TON	32-13/16	97-3/16	91-15/16

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.