


MODULAR OUTDOOR DOWN DISCHARGE DIRECT FIRED RECIRCULATING HEATER-ROOF TOP PACKAGE WITH COOLING, EVAPORATIVE COOLER INTAKE, V-BANK AND INTAKE HOOD

HW-RECHARGE-SM-00000174-001-15  
REV 4.0 06/15/2015

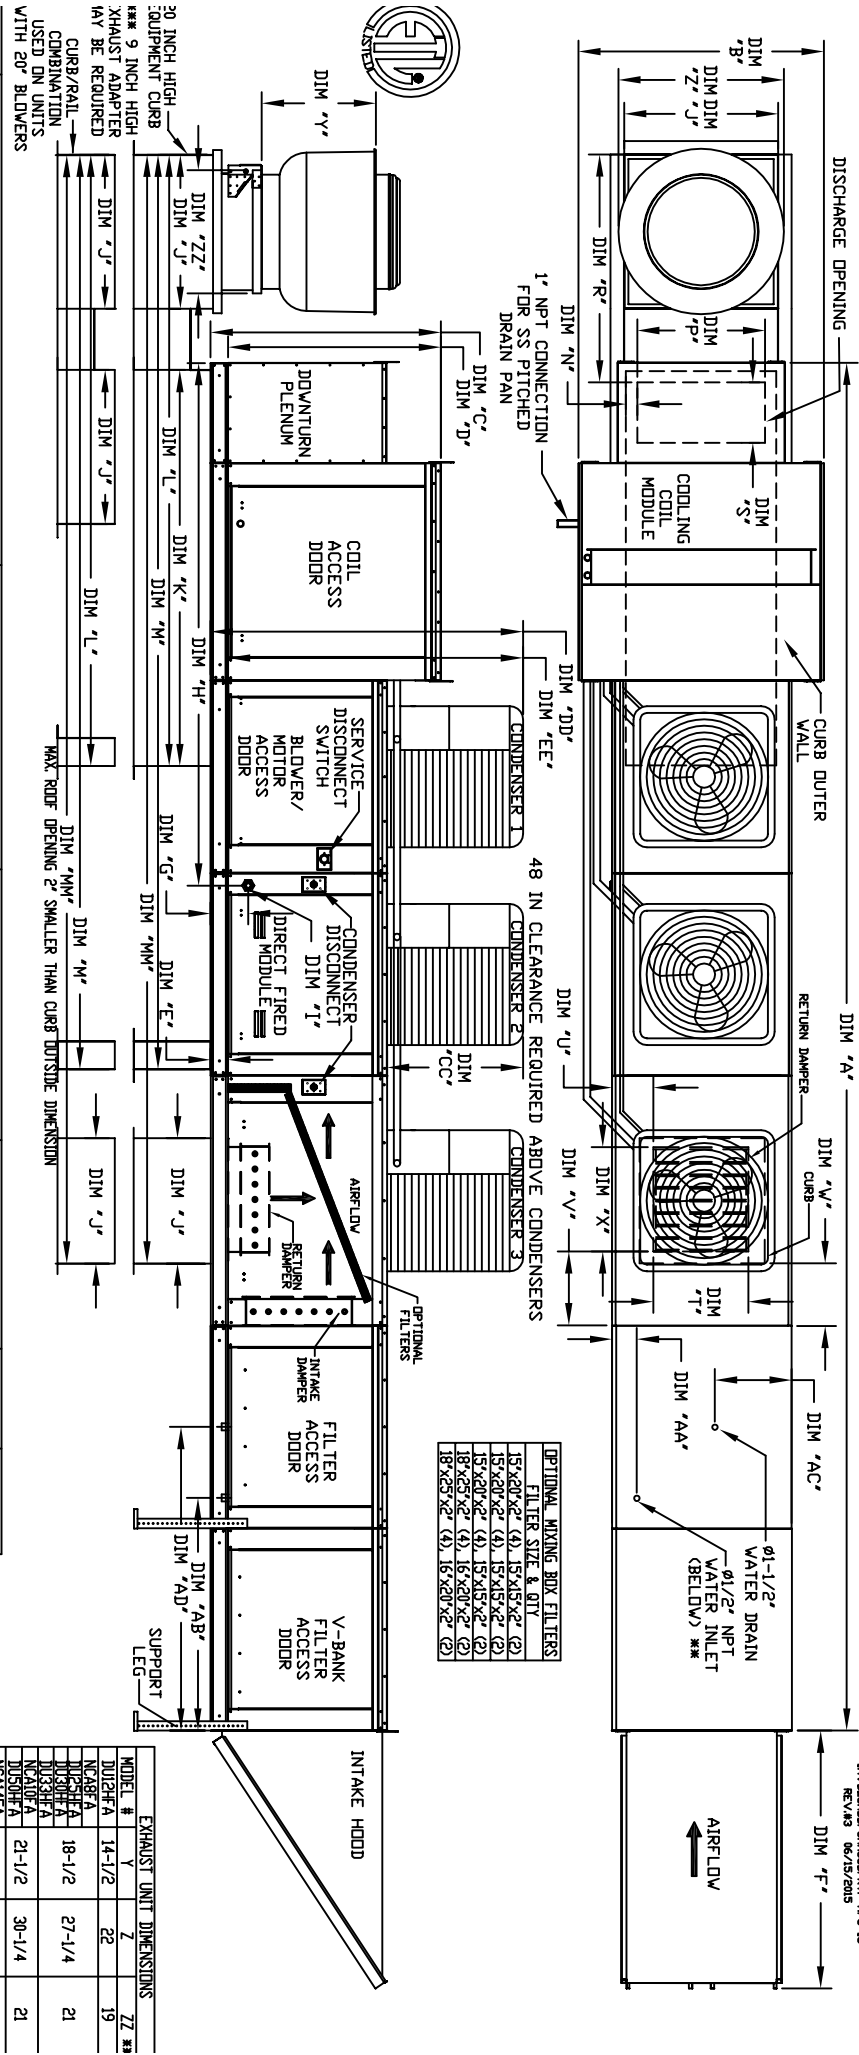

OPTIONAL MIXING BOX FILTERS

FILTER SIZE & QTY
15x20x2" (4) 15x15x2" (2)
15x20x2" (4) 15x15x2" (2)
15x20x2" (4) 15x15x2" (2)
18x25x2" (4) 16x20x2" (2)
18x25x2" (4) 16x20x2" (2)

UNIT DIMENSIONS

MODEL	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	V	X	AA	AB	AC	AD
D300-G18	27-3/4	54-3/8	56-3/8	51-1/8	5-1/4	51-5/8	9-1/2	114-7/16	35	84	133	199-5/8	239-1/16	6-5/16	22-3/8	49-1/2	18	8	7	4-1/2	30	4-1/2	144	20
D300-G18	27-3/4	54-3/8	56-3/8	51-1/8	5-1/4	51-5/8	9-1/2	114-7/16	35	84	133	199-5/8	239-1/16	6-5/16	22-3/8	49-1/2	18	8	7	4-1/2	30	4-1/2	144	20
D1000-G18	27-3/4	54-3/8	56-3/8	51-1/8	5-1/4	51-5/8	9-1/2	114-7/16	35	84	133	199-5/8	239-1/16	6-5/16	22-3/8	49-1/2	18	8	7	4-1/2	30	4-1/2	144	20
D1000-G20	32-1/4	60-7/16	64-3/8	59-1/8	5-1/4	56-3/8	13-9/16	151	42	115-3/16	171-3/16	255-7/8	303-7/8	5-1/4	31-1/2	56-3/16	23-1/2	11	8	36	4-1/2	141-1/8	23-1/2	52-7/8
D1000-G20	32-1/4	60-7/16	64-3/8	59-1/8	5-1/4	56-3/8	13-9/16	151	42	115-3/16	171-3/16	255-7/8	303-7/8	5-1/4	31-1/2	56-3/16	23-1/2	11	8	36	4-1/2	141-1/8	23-1/2	52-7/8

CONDENSER INFORMATION

MODEL	WEIGHT #	#1	TONNAGE #2	#3	CC	DD	EE
D300-G18	591 LBS	5 TON	5 TON	5 TON	32-13/16	76-3/16	70-7/8
D1000-G18	591 LBS	5 TON	5 TON	5 TON	32-13/16	97-3/16	91-15/16
D1000-G20	591 LBS	5 TON	5 TON	5 TON	32-13/16	97-3/16	91-15/16


CONDENSER INFORMATION

MODEL	BTU RANGE (QWB)	BTU LOW	BTU HIGH	MIN	MAX	GAS CONNECTION	GAS CONNECTION	TONNAGE RANGE	MIN	MAX	BTU RANGE	MIN	MAX	BTU RANGE	MIN	MAX	BTU RANGE	MIN	MAX	BTU RANGE	MIN	MAX
D300-G18	12"	18	550	7" VC	14" VC	1"	(NPT)	15 TON	15 TON	15 TON	20x25x2" (8)	89000 CFM	348 FPM	2300 LBS	20x25x2" (8)	348 FPM	2300 LBS	20x25x2" (8)	348 FPM	2300 LBS	20x25x2" (8)	348 FPM
D750-G18	18"	27.5	825	7" VC	14" VC	1"	(NPT)	15 TON	15 TON	15 TON	20x25x2" (8)	89000 CFM	348 FPM	2300 LBS	20x25x2" (8)	348 FPM	2300 LBS	20x25x2" (8)	348 FPM	2300 LBS	20x25x2" (8)	348 FPM
D1000-G18	24"	36.6	1100	7" VC	14" VC	1"	(NPT)	15 TON	15 TON	15 TON	20x25x2" (8)	89000 CFM	348 FPM	2300 LBS	20x25x2" (8)	348 FPM	2300 LBS	20x25x2" (8)	348 FPM	2300 LBS	20x25x2" (8)	348 FPM
D1000-G20	24"	36.6	1100	7" VC	14" VC	1"	(NPT)	15 TON	15 TON	15 TON	20x25x2" (8)	89000 CFM	348 FPM	2300 LBS	20x25x2" (8)	348 FPM	2300 LBS	20x25x2" (8)	348 FPM	2300 LBS	20x25x2" (8)	348 FPM
D1000-G20	30"	43.8	1375	7" VC	14" VC	1"	(NPT)	15 TON	15 TON	15 TON	20x25x2" (8)	89000 CFM	348 FPM	2300 LBS	20x25x2" (8)	348 FPM	2300 LBS	20x25x2" (8)	348 FPM	2300 LBS	20x25x2" (8)	348 FPM

CELEXEK EVAPORATIVE COOLING UNIT

MODEL	WEIGHT #	#1	TONNAGE #2	#3	CC	DD	EE
D300-G18	591 LBS	5 TON	5 TON	5 TON	32-13/16	76-3/16	70-7/8
D1000-G18	591 LBS	5 TON	5 TON	5 TON	32-13/16	97-3/16	91-15/16
D1000-G20	591 LBS	5 TON	5 TON	5 TON	32-13/16	97-3/16	91-15/16



Direct Fired Profile Plate Assembly

Direct Fired Profile Plate Assembly