


MODULAR OUTDOOR DOWN DISCHARGE ELECTRIC HEATER PACKAGED UNIT WITH COOLING, LPD EVAPORATIVE COOLER INTAKE, V-BANK AND INTAKE HOOD

HW/BJP/PCS/SH/CDP-HPU-15
REV. A/E 06/15/2015

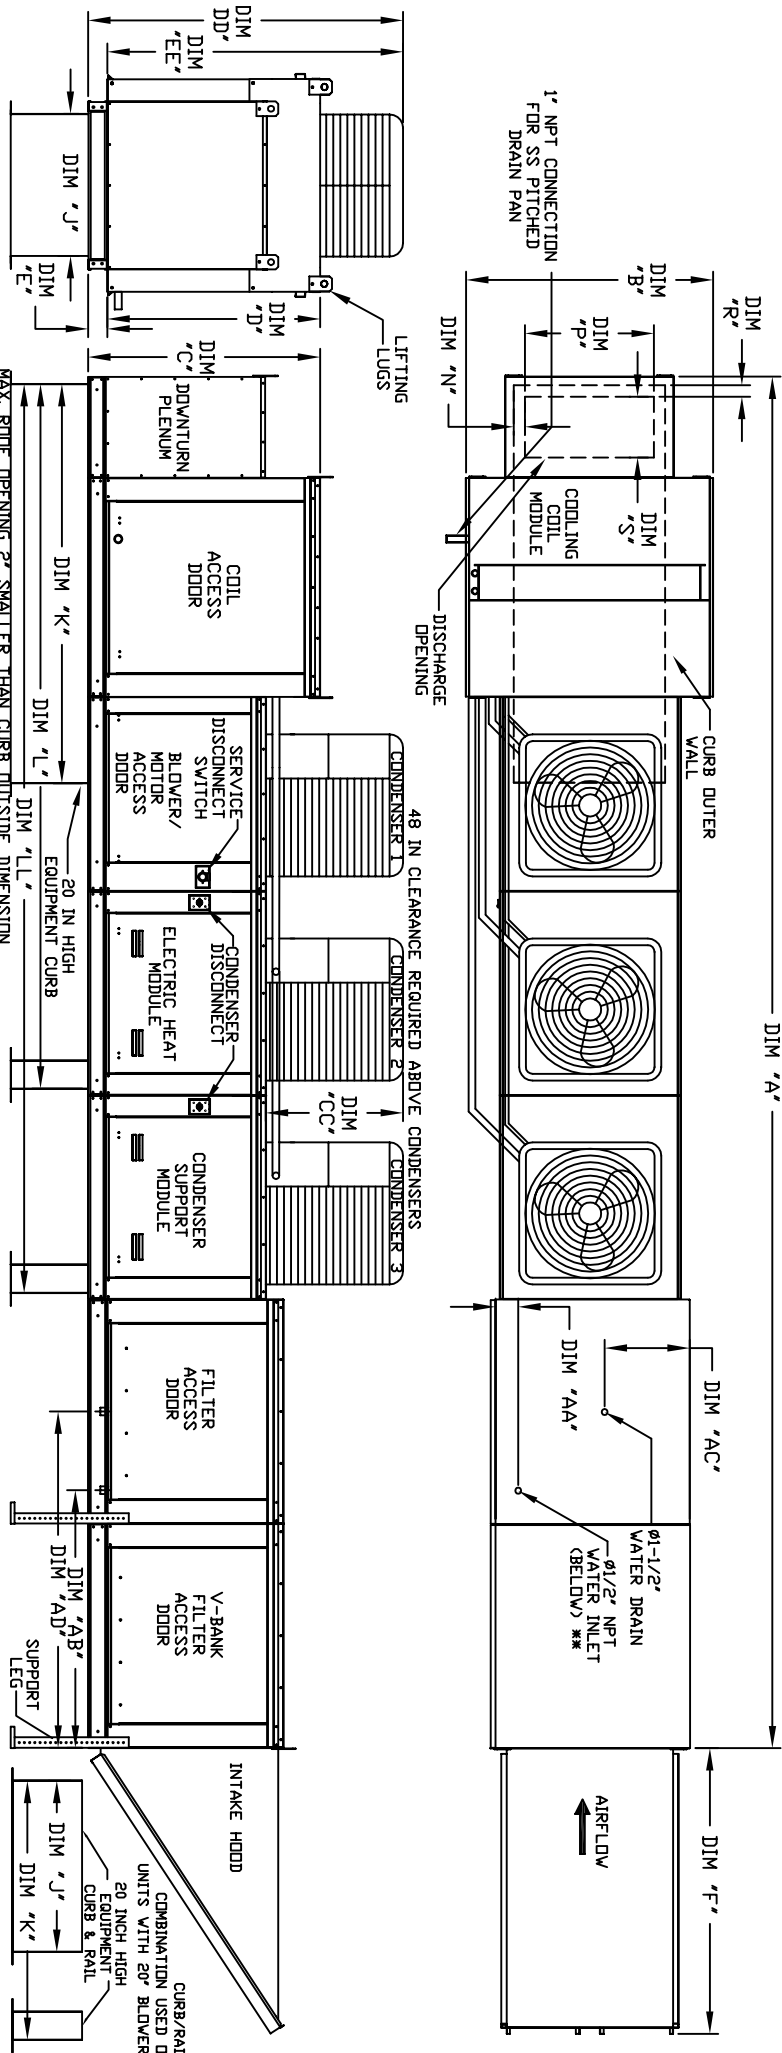

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	A	B	C	D	E	F	J	K	L	LL	N	P	R	S	AA	AB	AC	AD	
E3-G18	267	54-3/8	56-3/8	51-1/8	5-1/4	76-3/8	35	84	150-5/8	192-7/8	8-7/8	22-3/8	3	18	4-1/2	41-1/8	23-1/2	52-7/8	16x20x2" (15)
E4-920	358-1/4	60-7/16	64-3/8	59-1/8	5-1/4	71-3/8	42	115-3/16	199-13/16	254-1/8	7-7/8	31-1/2	3-1/4	23-1/2	4-1/2	41-1/8	28-7/8	52-7/8	20x25x2" (12)

UNIT INFORMATION:

MODEL	TONNAGE RANGE	MIN	MAX
E3-G18	15 Ton	15 Ton	15 Ton
E4-920	15 Ton	15 Ton	15 Ton

CELDEK EVAPORATIVE COOLING UNIT

MODEL	TOT. WEIGHT LBS	MEDIA SIZE & QTY	NOZZLES	MAX. FLOW RATE
E3-G18	2285	38"x43"x12"	35	10.15 GPH
E4-920	3315	45"x54"x12"	42	12.6 GPH

CONDENSER INFORMATION

MODEL	WEIGHT#	#1	#2	#3	CC	DD	EE
15 TON-G18/1591 LBS	5 TON	5 TON	5 TON	5 TON	32-13/16	76-3/16	70-7/8
15 TON-920/1591 LBS	5 TON	5 TON	5 TON	5 TON	32-13/16	97-3/16	91-15/16

MAX. ROOF OPENING 2" SMALLER THAN CURB OUTSIDE DIMENSION

MAX. MAX EVAP WATER PRESSURE = 50 PSI @ 70 DEG F