

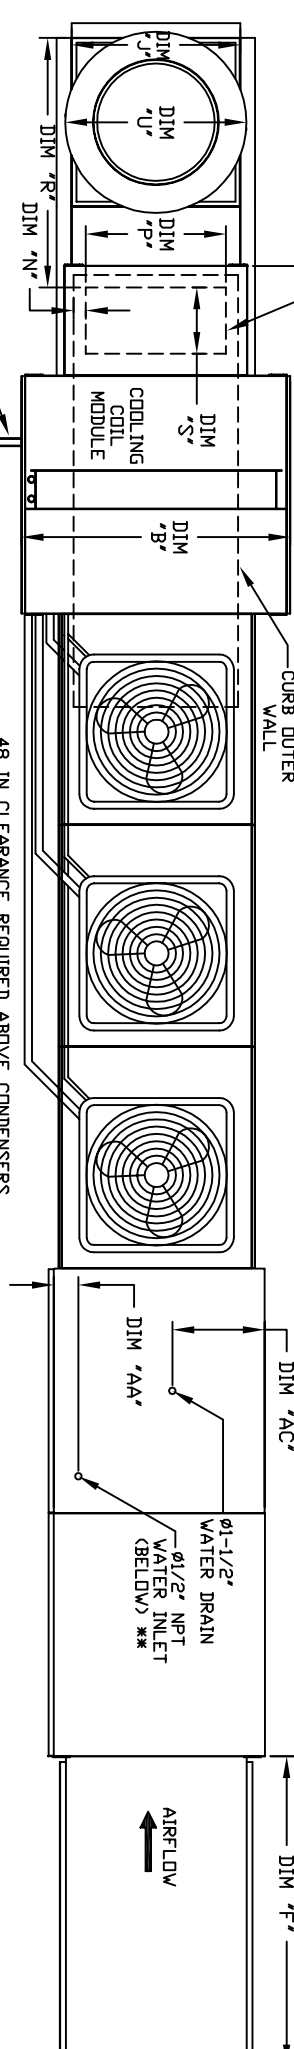


**MODULAR OUTDOOR DOWN DISCHARGE ELECTRIC HEATER-ROOF TOP PACKAGE WITH COOLING, LPD EVAPORATIVE COOLER INTAKE, V-BANK AND INTAKE HOOD**



1 1/2" NPT CONNECTION FOR SS PITCHED DRAIN PAN

48 IN CLEARANCE REQUIRED ABOVE CONDENSERS

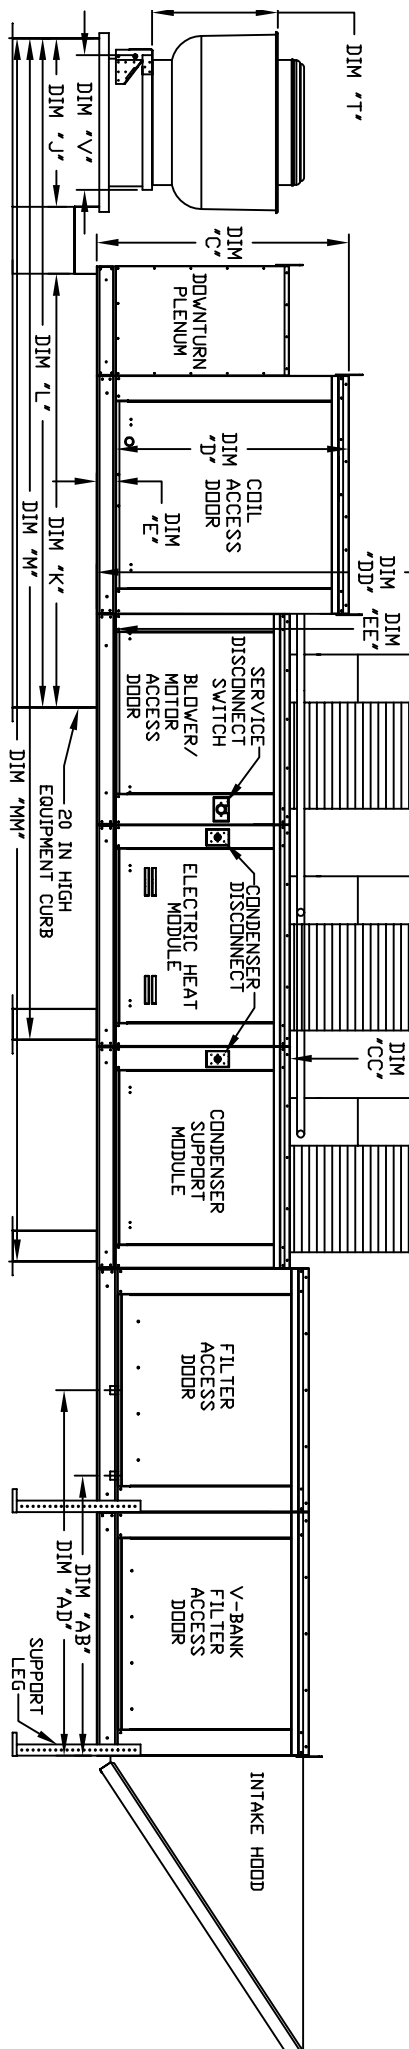

**EXHAUST UNIT DIMENSIONS**

MODEL #	T	U	V	***
BU12	14-1/2	22	19	
BU11	18-1/2	27-1/4	21	
BU10	21-1/2	30-1/4	21	
BU13	23	33-3/4	24-3/4	
BU15	23-1/2	39-3/8	28	
BU16	29-1/2	38-7/8	28	
BU18	30-5/8	43-3/8	33	
BU19	32-1/2	52-3/4	40	

**UNIT DIMENSIONS**

MODEL	A	B	C	D	E	F	J	K	L	M	N	P	R	S	AA	AB	AC	AD	AE	
E3-G18	26-7/8	54-3/8	56-3/8	51-1/8	5-1/4	76-3/8	35	84	133	199-5/8	241-7/8	6-5/16	22-3/8	49-1/2	18	4-1/2	41-1/8	23-1/2	52-7/8	16-1/2
E4-920	32-1/4	60-7/16	64-3/8	59-1/8	5-1/4	71-3/8	42	115-3/16	171-3/16	255-7/8	310-3/16	5-1/4	31-1/2	56-13/16	23-1/2	4-1/2	41-1/8	28-7/8	52-7/8	20-5/8

**UNIT INFORMATION**

MODEL	TONNAGE RANGE	WT. WEIGHT	HEIDA SIZE & QTY	NOZZLES	MAX FLOW RATE
E3-G18	15 TON	15 TON	2885 LBS	38"x43"x2"	35
E4-920	15 TON	15 TON	3315 LBS	45"x54"x2"	42

**CONDENSER INFORMATION**

MODEL	WEIGHT*	#1	#2	#3	CC	DD	EE
15 TON-G18	591 LBS	5 TON	5 TON	5 TON	32-13/16	76-3/16	70-7/8
15 TON-920	591 LBS	5 TON	5 TON	5 TON	32-13/16	97-3/16	91-15/16

MAX. ROOF OPENING 2" SMALLER THAN CURB OUTSIDE DIMENSION  
ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

\*\*\*9 INCH HIGH EXHAUST ADAPTER MAY BE REQUIRED

R410A REFRIGERANT