


EXHAUST UNIT DIMENSIONS

MODEL #	AE	AF	AG
DUA2FA	14-1/2	22	19
DU2FA	18-1/2	27-1/4	21
DU3FA	21-1/2	30-1/4	21
NA1FA	23	33-3/4	24-3/4
DU2FA	23-1/2	39-3/8	28
NA1FA	29-1/2	38-7/8	28
NA2FA	30-5/8	43-3/8	33
NA3FA	33-1/2	52-3/4	40

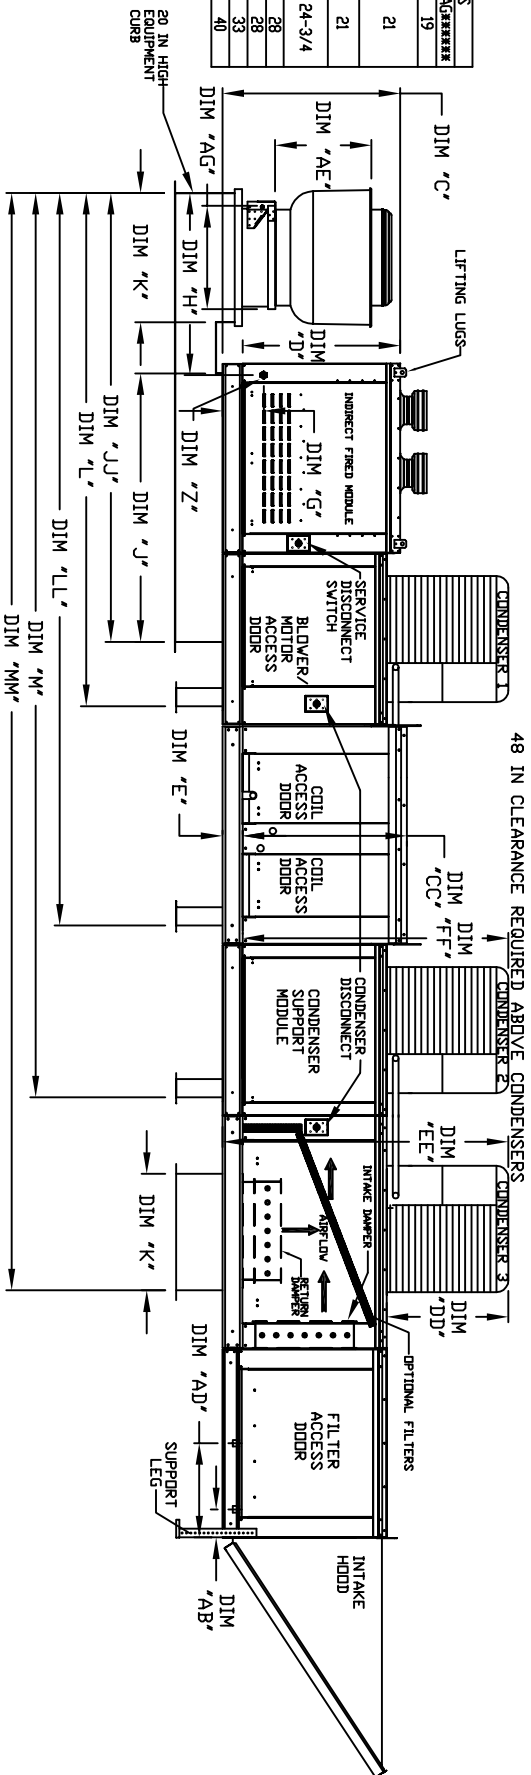

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MAX. ROOF OPENING 2" SMALLER THAN CURB OUTSIDE DIMENSION

UNIT DIMENSIONS

MODEL	A	B	BB	C	CC	D	E	F	G	H	J	K	JJ	LL	M	MM	N	P	R	S	U	V	W	X	Y	Z	AA	AB	AC	AD
3-18T-400-G18	E70-1/8	57-3/4	54-3/8	57-1/16	56-3/8	51-13/16	5-1/4	51-5/8	50-3/4	50-1/8	84	35	133	151-3/16	193-7/16	239-9/16	274-7/8	8	7	4-1/2	30	6-3/4	26-1/2	11-7/8	16-1/2	1	4-1/2	5-3/4	20	19
3-18T-600-300-G18	E70-1/8	57-3/4	54-3/8	57-1/16	56-3/8	51-13/16	5-1/4	51-5/8	50-3/4	50-1/8	84	35	133	151-3/16	193-7/16	239-9/16	274-7/8	8	7	4-1/2	30	6-3/4	26-1/2	11-7/8	16-1/2	1	4-1/2	5-3/4	20	19
3-18T-800-400-G18	E70-1/8	57-3/4	54-3/8	57-1/16	56-3/8	51-13/16	5-1/4	51-5/8	50-3/4	50-1/8	84	35	133	151-3/16	193-7/16	239-9/16	274-7/8	8	7	4-1/2	30	6-3/4	26-1/2	11-7/8	16-1/2	1	4-1/2	5-3/4	20	19

UNIT INFORMATION

MODEL	BTU RANGE (GEBH)***	TURNOVN RATIO	COMBUSTION EFFICIENCY***	GAS PRESSURE***	STD. WEIGHT	MEDIA SIZE & QTY	VEL. @ MAX. CFM	NOZZLES	MAX. FLOW RATE	TOT. WEIGHT	MEDIA SIZE & QTY	VEL. @ MAX. CFM	NOZZLES	MAX. FLOW RATE
3-18T-400-G18	400	53.3	80.0%	7" WC	237 LBS	20"x25"x2" (3)	348 FPM	14	7 GPH	2567 LBS	30"x35"x12"	1067 FPM	28	8.4 GPH
3-18T-600-300-G18	600	40	80.0%	7" WC	237 LBS	20"x25"x2" (3)	348 FPM	14	7 GPH	2567 LBS	30"x35"x12"	1067 FPM	28	8.4 GPH
3-18T-800-400-G18	800	53.3	80.0%	7" WC	237 LBS	20"x25"x2" (3)	348 FPM	14	7 GPH	2567 LBS	30"x35"x12"	1067 FPM	28	8.4 GPH

CONDENSER INFORMATION

CONDENSER INFORMATION	BTU RANGE (GEBH)***	TURNOVN RATIO	COMBUSTION EFFICIENCY***	GAS PRESSURE***	STD. WEIGHT	MEDIA SIZE & QTY	VEL. @ MAX. CFM	NOZZLES	MAX. FLOW RATE	TOT. WEIGHT	MEDIA SIZE & QTY	VEL. @ MAX. CFM	NOZZLES	MAX. FLOW RATE
3-18T-400-G18	400	53.3	80.0%	7" WC	237 LBS	20"x25"x2" (3)	348 FPM	14	7 GPH	2567 LBS	30"x35"x12"	1067 FPM	28	8.4 GPH
3-18T-600-300-G18	600	40	80.0%	7" WC	237 LBS	20"x25"x2" (3)	348 FPM	14	7 GPH	2567 LBS	30"x35"x12"	1067 FPM	28	8.4 GPH
3-18T-800-400-G18	800	53.3	80.0%	7" WC	237 LBS	20"x25"x2" (3)	348 FPM	14	7 GPH	2567 LBS	30"x35"x12"	1067 FPM	28	8.4 GPH

*** ADD CONDENSING UNIT WEIGHT TO WEIGHT IN TABLE ABOVE

*** ALL MODELS ARE FULLY ELECTRONICALLY MODULATING

*** COMBUSTION EFFICIENCY OF EVERY UNIT IS 80.0% OVER THE ENTIRE GAS FIRING RANGE.

*** GAS PRESSURES IN TABLE ARE FOR NATURAL GAS, LP MINIMUM GAS INLET PRESSURE = 1" W.C.

*** MAX. EVAP WATER PRESSURE

UNIT INFORMATION

***** 9 INCH HIGH EXHAUST ADAPTER