


MODULAR OUTDOOR DOWN DISCHARGE DIRECT FIRED RECIRCULATING HEATER WITH COOLING, LPD EVAPORATIVE COOLER INTAKE, V-BANK AND INTAKE HOOD

REVISED 06/15/2015

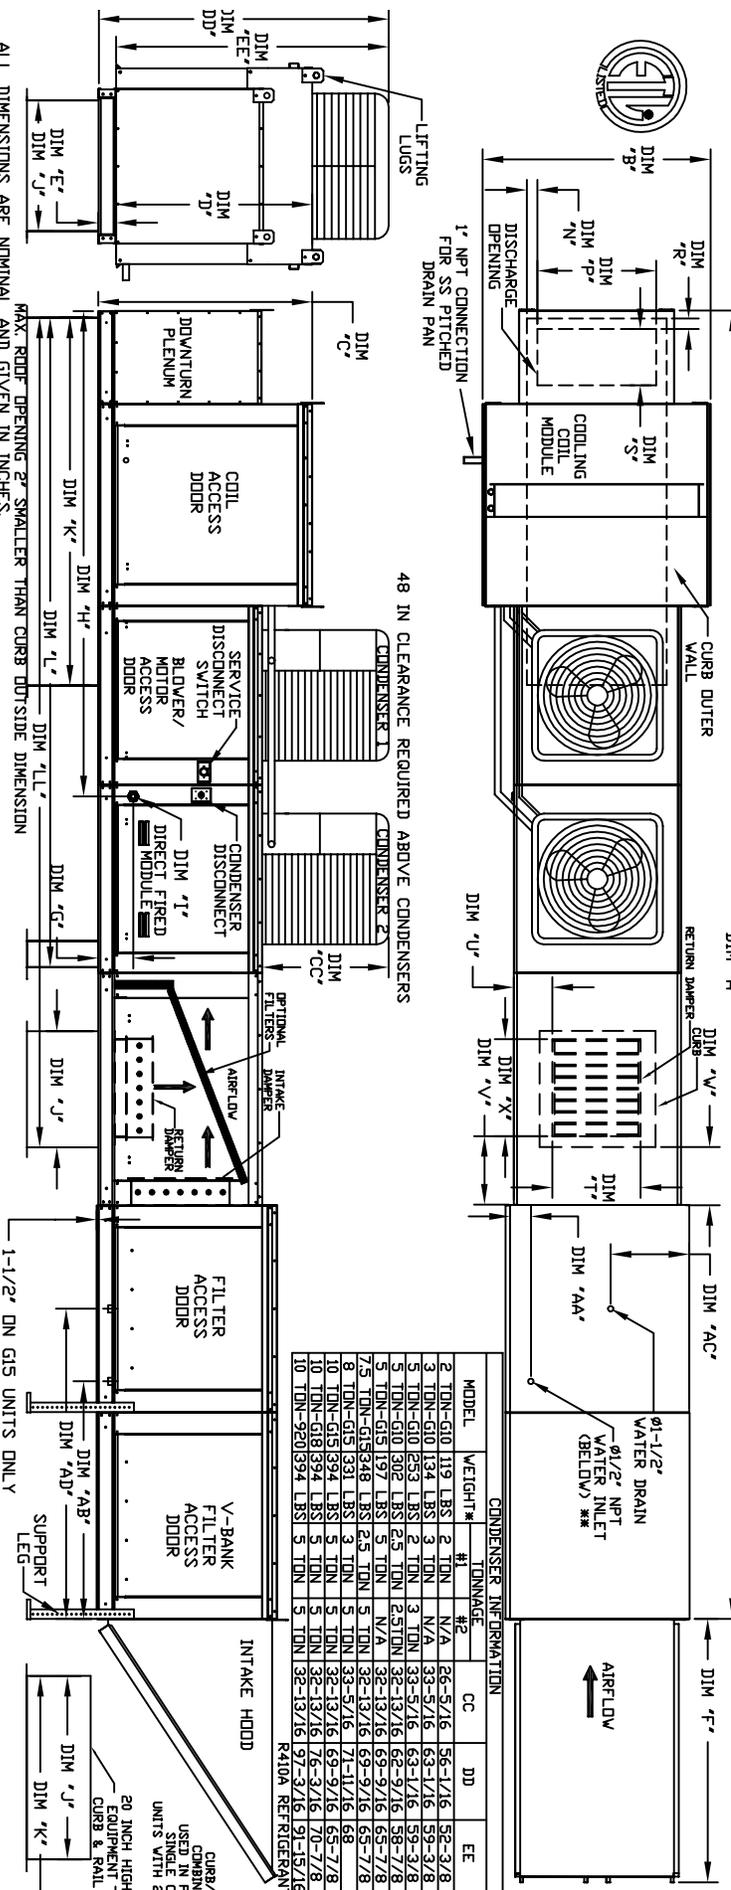

CONDENSER INFORMATION

| MODEL | WEIGHT # | TONNAGE #2 | CC | DD | EE |
|-------------|----------|------------|---------|----------|----------|
| 2 TON-G10 | 119 LBS | 2 TON | N/A | 26-5/16 | 56-1/16 |
| 3 TON-G10 | 134 LBS | 3 TON | N/A | 33-5/16 | 63-1/16 |
| 5 TON-G10 | 253 LBS | 5 TON | N/A | 33-5/16 | 63-1/16 |
| 5 TON-G10 | 302 LBS | 5 TON | 2.5 TON | 32-13/16 | 62-9/16 |
| 5 TON-G15 | 197 LBS | 5 TON | N/A | 32-13/16 | 62-9/16 |
| 7.5 TON-G15 | 348 LBS | 7.5 TON | N/A | 32-13/16 | 62-9/16 |
| 8 TON-G15 | 331 LBS | 8 TON | 3 TON | 33-5/16 | 71-1/16 |
| 10 TON-G15 | 394 LBS | 10 TON | 5 TON | 32-13/16 | 69-9/16 |
| 10 TON-G18 | 394 LBS | 10 TON | 5 TON | 32-13/16 | 76-3/16 |
| 10 TON-G20 | 394 LBS | 10 TON | 5 TON | 32-13/16 | 91-15/16 |

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES. MAX. ROOF OPENING 2" SMALLER THAN CURB DOOR SIDE DIMENSION

UNIT INFORMATION

| MODEL | BURNER BTU RANGE (GPH) | | GAS PRESSURE (MIN. MAX.) | | GAS CONNECTION (1" (GPH) 2" (MIN. MAX.)) | | TONNAGE RANGE (MIN. MAX. TON) | | FILTER SIZE & QTY | | CEILING EVAPORATIVE COOLING UNIT (TYP. WEIGHT (LBS) (25"X22"X12" (NEZZLES) MAX. FLOW RATE (GPH) | |
|-----------|------------------------|---------|--------------------------|--------|------------------------------------------|--------|-------------------------------|----------|-------------------|----------|-------------------------------------------------------------------------------------------------|----------|
| | A | B | C | D | E | F | G | H | J | K | L | N |
| D1500-G10 | 241-3/4 | 399-3/8 | 422-3/4 | 39 | 3-3/4 | 53-5/8 | 7-13/16 | 95-7/16 | 21 | 71 | 131-5/8 | 163-1/16 |
| D1500-G10 | 241-3/4 | 399-3/8 | 422-3/4 | 39 | 3-3/4 | 53-5/8 | 7-13/16 | 95-7/16 | 21 | 71 | 131-5/8 | 163-1/16 |
| D1500-G15 | 267-3/4 | 499-3/8 | 472-3/4 | 44 | 3-3/4 | 51-5/8 | 7-13/16 | 109-7/16 | 31 | 79 | 145-5/8 | 182-1/16 |
| D1500-G15 | 267-3/4 | 499-3/8 | 472-3/4 | 44 | 3-3/4 | 51-5/8 | 7-13/16 | 109-7/16 | 31 | 79 | 145-5/8 | 182-1/16 |
| D1500-G18 | 267-3/4 | 499-3/8 | 472-3/4 | 44 | 3-3/4 | 51-5/8 | 7-13/16 | 109-7/16 | 31 | 79 | 145-5/8 | 182-1/16 |
| D1500-G18 | 267 | 54-3/8 | 56-3/8 | 51-1/8 | 5-1/4 | 76-3/8 | 9-1/2 | 114-7/16 | 35 | 84 | 150-5/8 | 190-1/16 |
| D1500-G18 | 267 | 54-3/8 | 56-3/8 | 51-1/8 | 5-1/4 | 76-3/8 | 9-1/2 | 114-7/16 | 35 | 84 | 150-5/8 | 190-1/16 |
| D1500-G18 | 267 | 54-3/8 | 56-3/8 | 51-1/8 | 5-1/4 | 76-3/8 | 9-1/2 | 114-7/16 | 35 | 84 | 150-5/8 | 190-1/16 |
| D1500-G20 | 328-1/4 | 60-7/16 | 64-3/8 | 59-1/8 | 5-1/4 | 71-3/8 | 13-9/16 | 151 | 42 | 115-3/16 | 199-7/8 | 247-7/8 |
| D1500-G20 | 328-1/4 | 60-7/16 | 64-3/8 | 59-1/8 | 5-1/4 | 71-3/8 | 13-9/16 | 151 | 42 | 115-3/16 | 199-7/8 | 247-7/8 |

COIL ACCESS DOOR, SERVICE DISCONNECT BLOWER/MOTOR ACCESS DOOR, CONDENSER DISCONNECT, DIRECT FIRED MODULE, CONDENSER 2, AIRFLOW, INTAKE HOOD, V-BANK FILTER ACCESS DOOR, INTAKE DAMPER, RETURN DAMPER CURB, WATER DRAIN (1/2" NPT WATER INLET (BELOW) **), AIRFLOW, CURB/RAIL, CURB/RAIL CURB IN PLACE OR USED IN CURB ON UNITS WITH 20" BLOWERS, 20 INCH HIGH EQUIPMENT CURB & RAIL, CURB/RAIL CURB IN PLACE OR USED IN CURB ON UNITS WITH 20" BLOWERS, DIRECT FIRED (DF) Profile Plate Assembly

MAX. MAX. EVAP. WATER PRESSURE = 50 PSI @ 70 DEG. F

MAX. CONDENSING UNIT WEIGHT TO BE LISTED IN TABLE ABOVE

MAX. MAX. EVAP. WATER PRESSURE = 50 PSI @ 70 DEG. F

MAX. CONDENSING UNIT WEIGHT TO BE LISTED IN TABLE ABOVE

MAX. MAX. EVAP. WATER PRESSURE = 50 PSI @ 70 DEG. F

MAX. CONDENSING UNIT WEIGHT TO BE LISTED IN TABLE ABOVE