

OUTDOOR DOWN DISCHARGE MOD PACKAGE UNIT, EVAPORATIVE COOLER INTAKE, INTAKE HOOD AND OPTIONAL MIXING BOX


JTCB03044-001
REV# 6/25/2015



CONDENSER INFORMATION

MODEL	WEIGHT*	#1 TONNAGE	#2 TONNAGE	CC	DD	EE
2 TON-G10	119 LBS	2 TON	N/A	66-5/16	56-1/16	52-3/8
3 TON-G10	134 LBS	2 TON	N/A	33-5/16	63-1/16	59-3/8
5 TON-G10	253 LBS	2 TON	3 TON	33-5/16	63-1/16	59-3/8
5 TON-G10	302 LBS	2.5 TON	2.5 TON	32-13/16	62-9/16	58-7/8
5 TON-G10	197 LBS	5 TON	N/A	32-13/16	69-9/16	65-7/8
7.5 TON-G12	348 LBS	2.5 TON	5 TON	32-13/16	69-9/16	65-7/8
10 TON-G12	394 LBS	5 TON	5 TON	32-13/16	69-9/16	65-7/8
10 TON-G15	197 LBS	5 TON	N/A	32-13/16	69-9/16	65-7/8
7.5 TON-G15	302 LBS	2.5 TON	5 TON	32-13/16	69-9/16	65-7/8
8 TON-G15	331 LBS	3 TON	5 TON	33-5/16	71-11/16	68
10 TON-G15	394 LBS	5 TON	5 TON	33-5/16	69-9/16	65-7/8
10 TON-G18	394 LBS	5 TON	5 TON	32-13/16	76-3/16	70-7/8
10 TON-G20	394 LBS	5 TON	5 TON	32-13/16	97-3/16	91-15/16

*410A REFRIGERANT

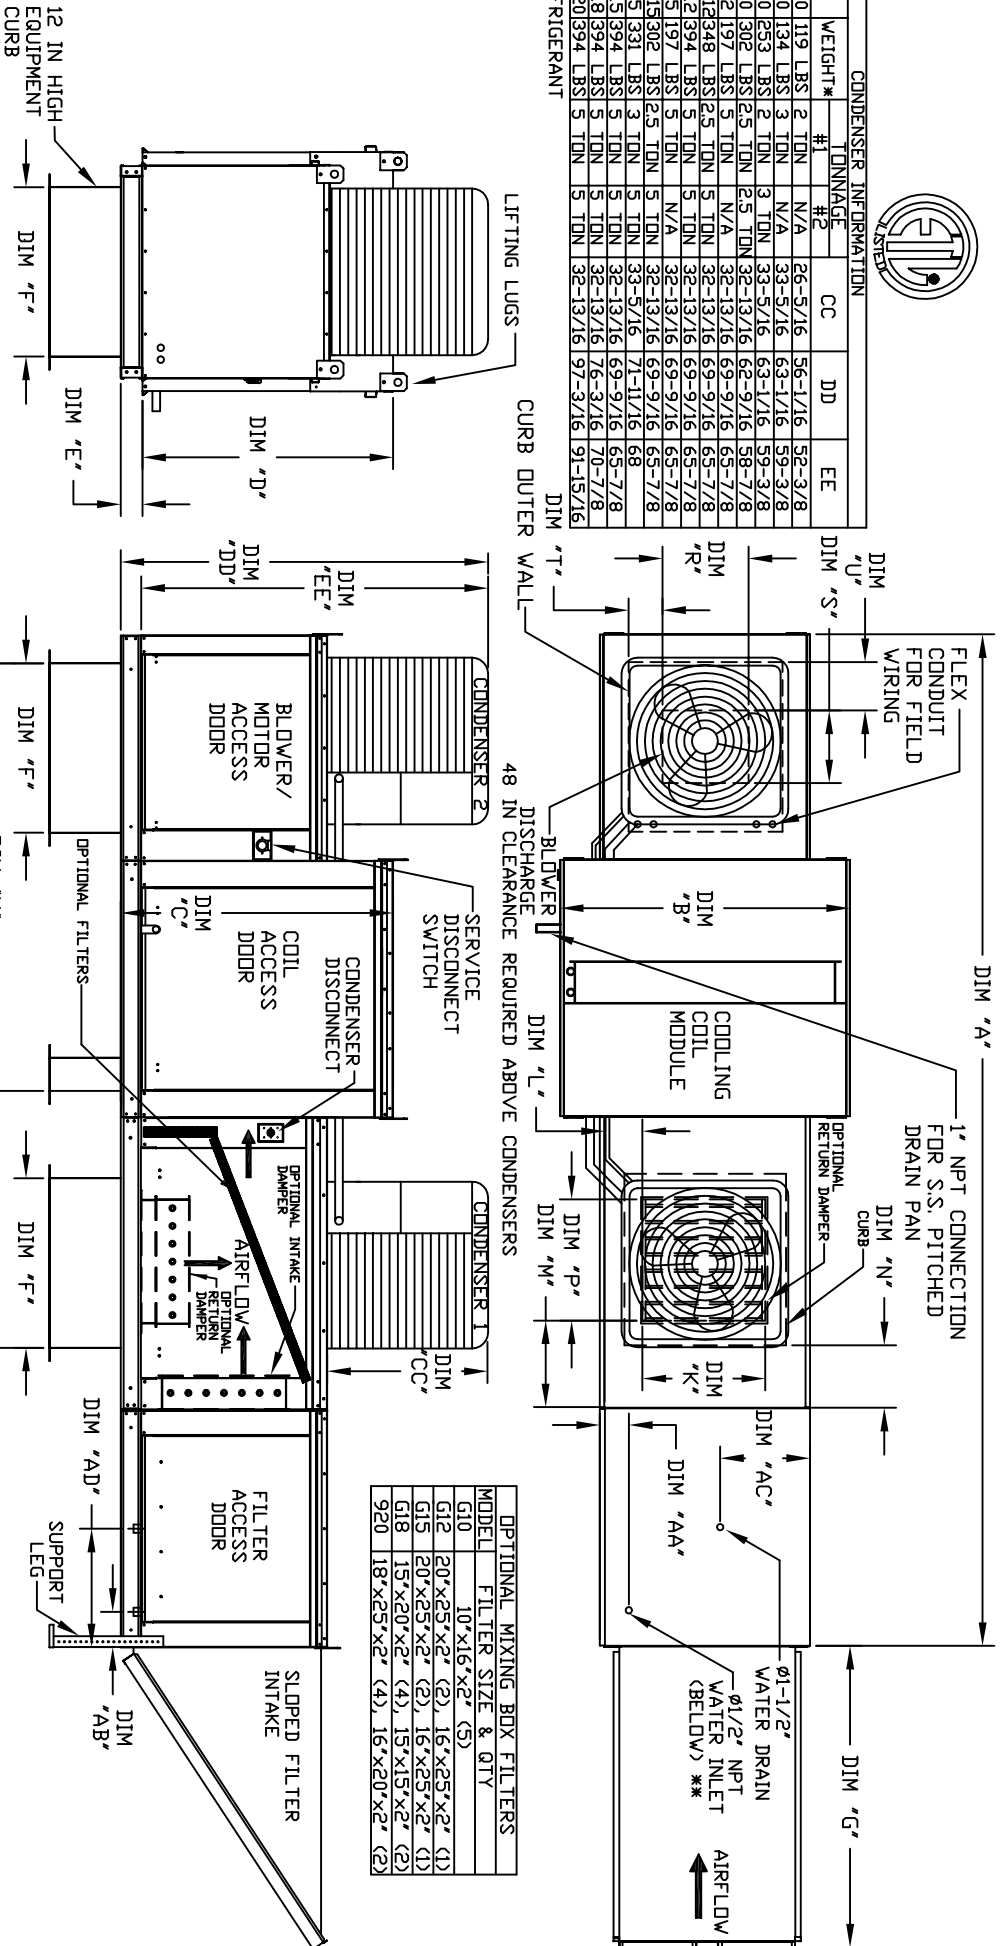

OPTIONAL MIXING BOX FILTERS

MODEL	FILTER SIZE & QTY
G10	10"x16"x2" (5)
G12	20"x25"x2" (2), 16"x25"x2" (1)
G15	20"x25"x2" (2), 16"x25"x2" (1)
G18	15"x20"x2" (4), 15"x15"x2" (2)
920	18"x25"x2" (4), 16"x20"x2" (2)

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

UNIT DIMENSIONS

MODEL	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	R	S	T	U	MIN	MAX	AA	AB	AC	AD
G10	148-7/8	39-3/8	42-3/4	39	3-3/4	21	44-3/8	98-5/8	65-13/16	14	8	14	12-1/2	18-13/16	1-1/4	11-1/2	3-7/8	1-3/4	2	5 Ton	4-1/2	6-1/4	13	13	16
G12	156-7/8	49-3/8	47-3/4	44	3-3/4	31	53-5/8	112-5/8	74-5/8	22-3/4	8	11	7-1/2	24-15/16	3/4	13-9/16	7-5/8	7-15/16	5 Ton	10 Ton	4-1/2	6-1/4	18	18	16
G15	156-7/8	49-3/8	47-3/4	44	3-3/4	31	53-5/8	112-5/8	74-5/8	22-3/4	8	11	7-1/2	24-15/16	3/4	13-9/16	7-5/8	7-15/16	5 Ton	10 Ton	4-1/2	6-1/4	18	18	16
G18	167-7/8	54-3/8	56-3/8	51-1/8	5-1/4	35	51-5/8	120-1/8	79-3/16	28	8	7	4-1/2	30	22	19	6-1/2	7	10 Ton	10 Ton	4-1/2	5-3/4	20	20	19
920	208-3/16	60-7/16	64-3/8	59-1/8	5-1/4	42	76-3/8	153-15/16	104-9/32	33	10	11	8	36	24-7/8	24-7/8	8-9/16	1-1/8	10 Ton	10 Ton	4-1/2	5-3/4	23-1/2	23-1/2	17-1/2

UNIT INFORMATION

MODEL	FILTER SIZE & QTY	MAX. FILTER VELOCITY	STANDARD EVAPORATIVE COOLING UNIT		CELDEK EVAPORATIVE COOLING UNIT								
			TOT. WEIGHT	MEDIA SIZE & QTY	TOT. WEIGHT	MEDIA SIZE & QTY							
G10	16"x20"x2" (3)	@3500 CFM = 667 FPM	890 LBS	20"x25"x2" (3)	406 FPM	6	3	3 GPH	895 LBS	20"x24"x12"	1050 FPM	12	3.9 GPH
G12	20"x25"x2" (3)	@5000 CFM = 580 FPM	1240 LBS	16"x20"x2" (8)	358 FPM	10	5	5 GPH	1235 LBS	25"x32"x12"	900 FPM	20	6.5 GPH
G15	20"x25"x2" (3)	@6000 CFM = 696 FPM	1250 LBS	16"x20"x2" (8)	429 FPM	10	5	5 GPH	1245 LBS	25"x32"x12"	1080 FPM	20	6.5 GPH
G18	16"x20"x2" (6)	@8000 CFM = 762 FPM	1550 LBS	20"x25"x2" (8)	348 FPM	14	7	7 GPH	1540 LBS	30"x36"x12"	1067 FPM	28	8.4 GPH
920	16"x20"x2" (10)	@15000 CFM = 857 FPM	2530 LBS	16"x20"x2" (15)	572 FPM	24	12	12 GPH	2500 LBS	38"x43"x12"	1322 FPM	35	10.15 GPH

WARRANTY COMMENCEMENT DATE: UNIT WEIGHT TO WEIGHT IN TARE TO ARRIVE

MAX. MEDIA WEIGHT VARIATION DIFFERENCE - EN PAGE 2 TO 7A NPT