


OUTDOOR SIDE DISCHARGE MOD PACKAGE UNIT, EVAPORATIVE COOLER INTAKE, INTAKE HOOD AND OPTIONAL MIXING BOX

JHC06C3AH-HPU
REV#2 06/15/2015



CONDENSER INFORMATION

| MODEL | WEIGHT# | TONNAGE #1 | TONNAGE #2 | CC | DD | EE |
|------------------|---------|------------|------------|----------|----------|----------|
| 2 TON-G10 | 119 LBS | 2 TON | N/A | 26-5/16 | 56-1/16 | 52-3/8 |
| 3 TON-G10 | 134 LBS | 3 TON | N/A | 33-9/16 | 63-1/16 | 59-3/8 |
| 5 TON-G10 | 233 LBS | 2 TON | 3 TON | 33-5/16 | 63-1/16 | 59-3/8 |
| 5 TON-G10 | 302 LBS | 2.5 TON | 3 TON | 32-13/16 | 62-9/16 | 58-7/8 |
| 5 TON-G12 | 197 LBS | 5 TON | N/A | 32-13/16 | 69-9/16 | 65-7/8 |
| 7.5 TON-G12 | 348 LBS | 2.5 TON | 5 TON | 32-13/16 | 69-9/16 | 65-7/8 |
| 10 TON-G12 | 394 LBS | 5 TON | 5 TON | 32-13/16 | 69-9/16 | 65-7/8 |
| 5 TON-G15 | 197 LBS | 5 TON | N/A | 32-13/16 | 69-9/16 | 65-7/8 |
| 7.5 TON-G15 | 302 LBS | 5 TON | 5 TON | 32-13/16 | 69-9/16 | 65-7/8 |
| 8 TON-G15 | 331 LBS | 3 TON | 5 TON | 33-5/16 | 71-11/16 | 68 |
| 10 TON-G15 | 394 LBS | 5 TON | 5 TON | 32-13/16 | 69-9/16 | 65-7/8 |
| 10 TON-G18 | 394 LBS | 5 TON | 5 TON | 32-13/16 | 76-3/16 | 70-7/8 |
| 10 TON-G20 | 394 LBS | 5 TON | 5 TON | 32-13/16 | 97-3/16 | 91-15/16 |
| 410A REFRIGERANT | | | | | | |

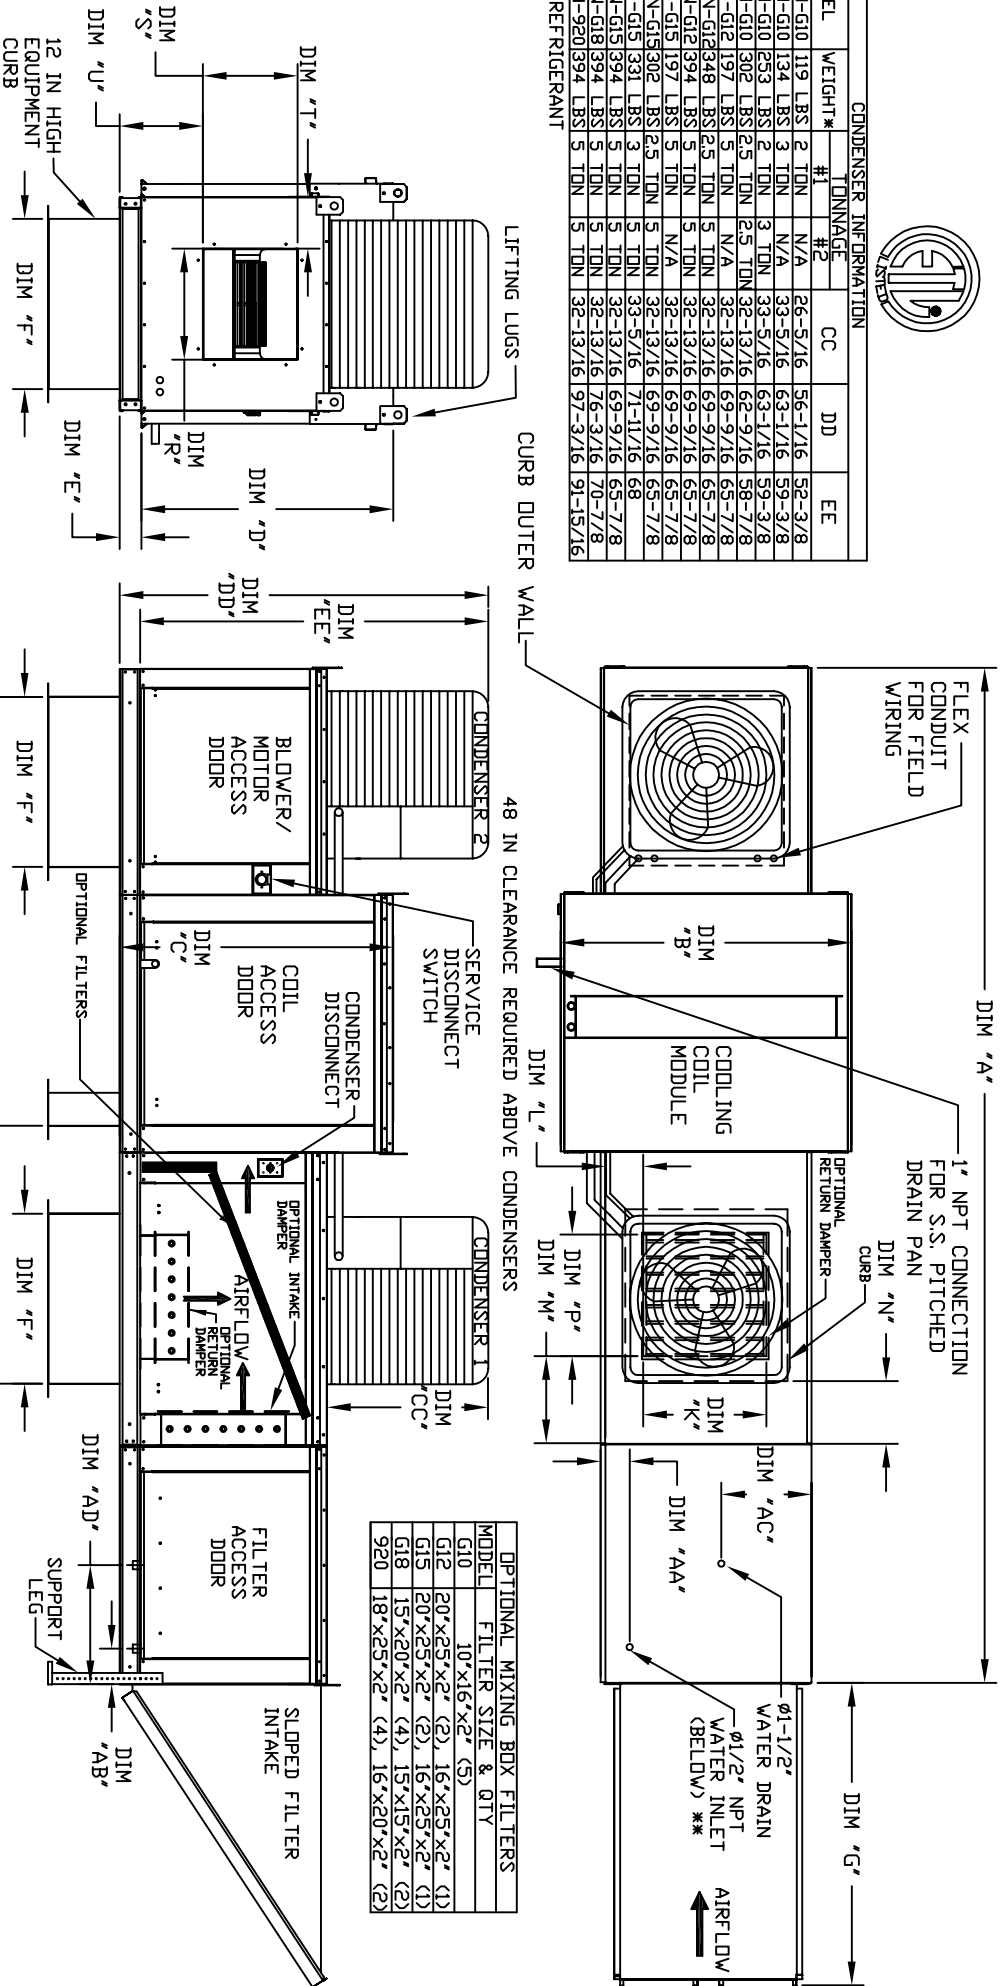

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MAX. ROOF OPENING 2" SMALLER THAN CURB OUTSIDE DIMENSION.

| MODEL | UNIT DIMENSIONS | | | | | | | | | | | | | STANDARD EVAPORATIVE COOLING UNIT | | | | | | | | | | | | | CELDEK EVAPORATIVE COOLING UNIT | | | | | | | | | | | | |
|-------|-----------------|---------|--------|--------|-------|----|--------|-----------|----------|--------|----|----|--------|-----------------------------------|---------|---------|---------|----|--------|-------|-------|--------|--------|------|-------------|------------------|---------------------------------|----------------|-------------|------------------|-----------------|----------------|-------------|------------------|-----------------|----------------|----|-------|-----|
| | A | B | C | D | E | F | G | H | J | K | L | M | N | P | R | S | T | U | MIN | MAX | AA | AB | AC | AD | TOT. WEIGHT | MEDIA SIZE & QTY | VEL. @ MAX. CFM | MIN. FLOW RATE | TOT. WEIGHT | MEDIA SIZE & QTY | VEL. @ MAX. CFM | MIN. FLOW RATE | TOT. WEIGHT | MEDIA SIZE & QTY | VEL. @ MAX. CFM | MIN. FLOW RATE | | | |
| G10 | 148-7/8 | 39-3/8 | 42-3/4 | 39 | 3-3/4 | 21 | 44-3/8 | 98-5/8 | 65-13/16 | 14 | 8 | 14 | 12-1/2 | 18-13/16 | 11-1/2 | 6-3/8 | 11-7/8 | 2 | 5 Ton | 4-1/2 | 6-1/4 | 13 | 16 | 890 | LBS | 20"x25"x2" (3) | 406 | FPM | 6 | 3 | GPH | 895 | LBS | 20"x24"x12" | 1050 | FPM | 12 | 3.9 | GPH |
| G12 | 156-7/8 | 49-3/8 | 47-3/4 | 44 | 3-3/4 | 31 | 53-5/8 | 112-5/8 | 74-5/8 | 22-3/4 | 11 | 11 | 7-1/2 | 24-15-3/4 | 13-9/16 | 10-1/8 | 13-1/16 | 5 | 10 Ton | 4-1/2 | 6-1/4 | 18 | 16 | 1240 | LBS | 16"x20"x2" (8) | 358 | FPM | 10 | 5 | GPH | 1235 | LBS | 25"x32"x12" | 1080 | FPM | 20 | 6.5 | GPH |
| G15 | 156-7/8 | 49-3/8 | 47-3/4 | 44 | 3-3/4 | 31 | 53-5/8 | 112-5/8 | 74-5/8 | 22-3/4 | 11 | 11 | 7-1/2 | 24-18-3/4 | 13 | 8-5/8 | 14-1/16 | 5 | 10 Ton | 4-1/2 | 6-1/4 | 18 | 16 | 1250 | LBS | 16"x20"x2" (8) | 429 | FPM | 10 | 5 | GPH | 1245 | LBS | 25"x32"x12" | 1080 | FPM | 20 | 6.5 | GPH |
| G18 | 167-7/8 | 54-3/8 | 56-3/8 | 51-1/4 | 5-1/4 | 35 | 51-5/8 | 120-1/8 | 79-3/16 | 28 | 8 | 7 | 4-1/2 | 30 | 22 | 9 | 17-7/8 | 10 | 10 Ton | 4-1/2 | 5-3/4 | 20 | 19 | 1500 | LBS | 20"x25"x2" (8) | 348 | FPM | 14 | 7 | GPH | 1540 | LBS | 30"x36"x12" | 1067 | FPM | 28 | 8.4 | GPH |
| 920 | 208-3/16 | 60-7/16 | 64-3/8 | 59-1/8 | 5-1/4 | 42 | 76-3/8 | 153-15/16 | 104-9/32 | 33 | 10 | 11 | 8 | 36 | 24-7/8 | 11-1/16 | 19-1/8 | 10 | 10 Ton | 4-1/2 | 5-3/4 | 23-1/2 | 17-1/2 | 2300 | LBS | 16"x20"x2" (15) | 572 | FPM | 24 | 12 | GPH | 2300 | LBS | 38"x43"x12" | 1322 | FPM | 35 | 10.15 | GPH |

UNIT INFORMATION

| MODEL | FILTER SIZE & QTY | MAX. FILTER VELOCITY | TOT. WEIGHT | MEDIA SIZE & QTY | VEL. @ MAX. CFM | MIN. FLOW RATE |
|-------|-------------------|----------------------|-------------|------------------|-----------------|----------------|
| G10 | 16"x20"x2" (3) | 667 FPM | 890 LBS | 20"x25"x2" (3) | 406 FPM | 6 |
| G12 | 20"x25"x2" (3) | 667 FPM | 1240 LBS | 16"x20"x2" (8) | 358 FPM | 10 |
| G15 | 20"x25"x2" (3) | 667 FPM | 1250 LBS | 16"x20"x2" (8) | 429 FPM | 10 |
| G18 | 16"x20"x2" (6) | 88000 CFM = 762 FPM | 1500 LBS | 20"x25"x2" (8) | 348 FPM | 14 |
| 920 | 16"x20"x2" (10) | 857 FPM | 2300 LBS | 16"x20"x2" (15) | 572 FPM | 24 |

WARRANTY INFORMATION: UNIT VERTICAL TO VERTICAL TO TAB FOR ABOVE

SEE MANUFACTURER'S LITERATURE FOR MORE INFORMATION