REV.#3 06/15/2015

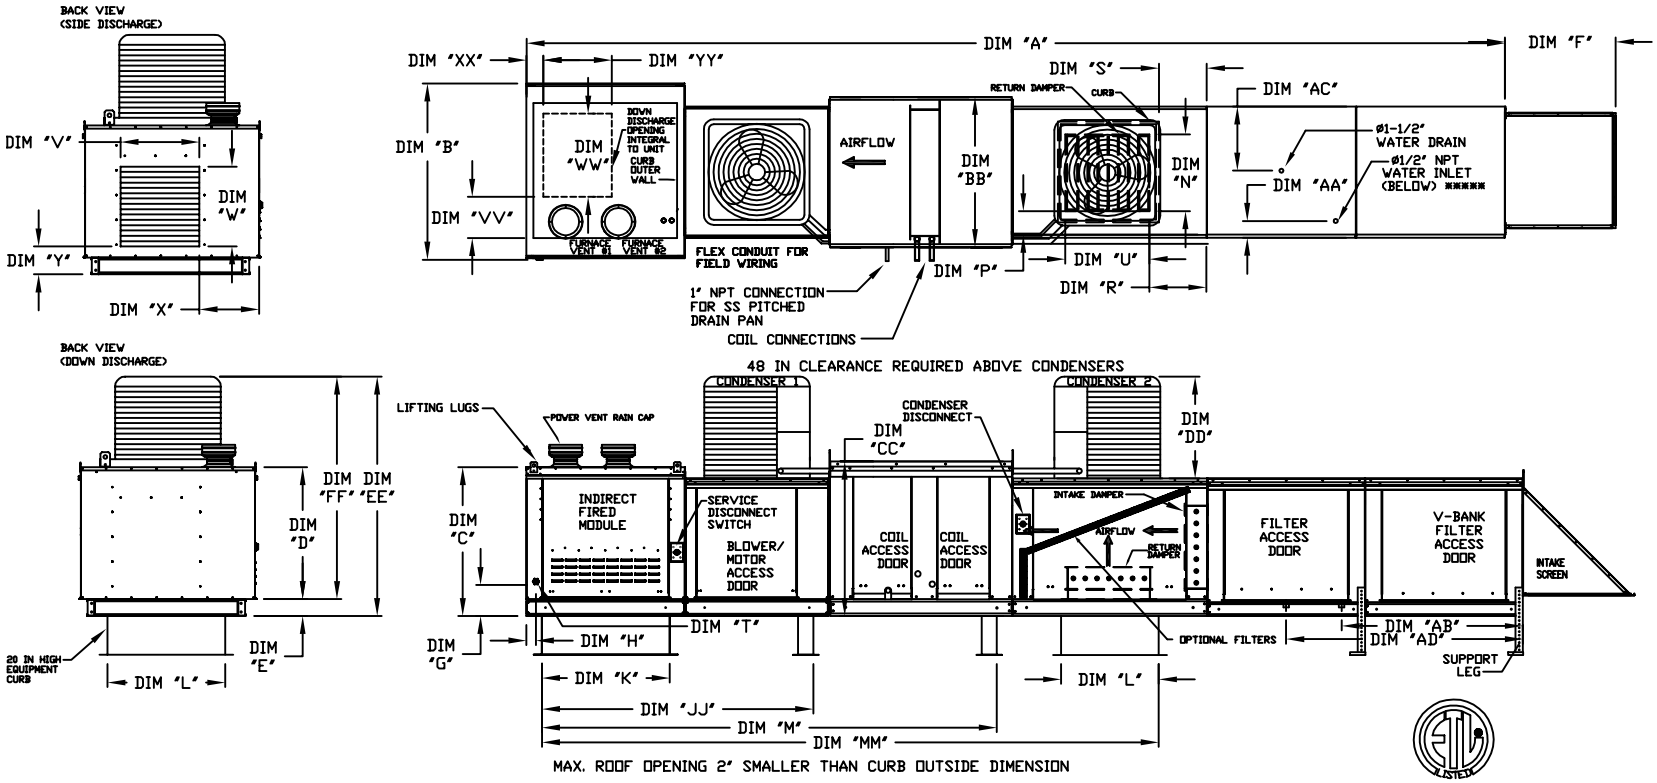

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	UNIT DIMENSIONS															MIXING BOX OPENING					SIDE DISCHARGE OPENING				DOWN DISCHARGE OPENING				GAS CONNECTION	# OF FURNACES	WATER INLET		DRAIN OPENING	
	A	B	BB	C	CC	D	E	F	G	H	JJ	K	L	M	MM	N	P	R	S	U	V	W	X	Y	VV	WW	XX	YY	"T" (NPT)		AA	AB	AC	AD
1-IBT.150-G10	241-1/4	49-1/2	39-3/8	39-9/16	42-3/4	35-13/16	3-3/4	22-3/8	8-3/4	2-11/16	89-3/16	71	21	131-7/16	162-3/4	14	8	14	12-1/2	18	17-3/4	17-3/4	18-1/2	7-1/4	3	16-3/4	8-1/8	21	3/4	1	4-1/2	38-1/2	13	48-1/4
1-IBT.200-G10	241-1/4	49-1/2	39-3/8	39-9/16	42-3/4	35-13/16	3-3/4	22-3/8	8-3/4	2-11/16	89-3/16	71	21	131-7/16	162-3/4	14	8	14	12-1/2	18	17-3/4	17-3/4	18-1/2	7-1/4	3	16-3/4	8-1/8	21	3/4	1	4-1/2	38-1/2	13	48-1/4
1-IBT.300-150-150-G10	241-1/4	49-1/2	39-3/8	39-9/16	42-3/4	35-13/16	3-3/4	22-3/8	8-3/4	2-11/16	89-3/16	71	21	131-7/16	162-3/4	14	8	14	12-1/2	18	17-3/4	17-3/4	18-1/2	7-1/4	3	16-3/4	8-1/8	21	3/4	2	4-1/2	38-1/2	13	48-1/4
1-IBT.400-200-200-G10	241-1/4	49-1/2	39-3/8	39-9/16	42-3/4	35-13/16	3-3/4	22-3/8	8-3/4	2-11/16	89-3/16	71	21	131-7/16	162-3/4	14	8	14	12-1/2	18	17-3/4	17-3/4	18-1/2	7-1/4	3	16-3/4	8-1/8	21	3/4	2	4-1/2	38-1/2	13	48-1/4
2-IBT.200-G15	249-1/4	49-1/2	49-3/8	39-9/16	47-3/4	35-13/16	3-3/4	30-5/16	8-3/4	2-11/16	97-3/16	79	31	139-7/16	175-3/4	22-3/4	8	11	7-1/2	24	24-1/2	17-3/4	18-1/2	7-1/4	5	24	8-1/8	21	1	1	4-1/2	38-1/2	18	48-1/4
2-IBT.300-G15	249-1/4	49-1/2	49-3/8	53-7/8	47-3/4	50-1/8	3-3/4	30-5/16	8-3/4	2-11/16	97-3/16	79	31	139-7/16	175-3/4	22-3/4	8	11	7-1/2	24	24-1/2	24-1/2	18-1/2	7-1/4	5	24	8-1/8	21	1	1	4-1/2	38-1/2	18	48-1/4
2-IBT.400-G15	249-1/4	49-1/2	49-3/8	53-7/8	47-3/4	50-1/8	3-3/4	30-5/16	8-3/4	2-11/16	97-3/16	79	31	139-7/16	175-3/4	22-3/4	8	11	7-1/2	24	24-1/2	24-1/2	18-1/2	7-1/4	5	24	8-1/8	21	1	1	4-1/2	38-1/2	18	48-1/4
2-IBT.400-200-200-G15	249-1/4	49-1/2	49-3/8	39-9/16	47-3/4	35-13/16	3-3/4	30-5/16	8-3/4	2-11/16	97-3/16	79	31	139-7/16	175-3/4	22-3/4	8	11	7-1/2	24	24-1/2	17-3/4	18-1/2	7-1/4	5	24	8-1/8	21	1	2	4-1/2	38-1/2	18	48-1/4
2-IBT.600-300-300-G15	249-1/4	49-1/2	49-3/8	53-7/8	47-3/4	50-1/8	3-3/4	30-5/16	8-3/4	2-11/16	97-3/16	79	31	139-7/16	175-3/4	22-3/4	8	11	7-1/2	24	24-1/2	24-1/2	18-1/2	7-1/4	5	24	8-1/8	21	1	2	4-1/2	38-1/2	18	48-1/4
2-IBT.800-400-400-G15	249-1/4	49-1/2	49-3/8	53-7/8	47-3/4	50-1/8	3-3/4	30-5/16	8-3/4	2-11/16	97-3/16	79	31	139-7/16	175-3/4	22-3/4	8	11	7-1/2	24	24-1/2	24-1/2	18-1/2	7-1/4	5	24	8-1/8	21	1	2	4-1/2	38-1/2	18	48-1/4
3-IBT.400-G18	266-1/4	57-3/4	54-3/8	57-1/16	56-3/8	51-13/16	5-1/4	34-3/16	10-3/4	2-11/16	102-3/16	84	35	144-7/16	183-3/4	28	8	7	4-1/2	30	27-1/2	31	18-1/2	8-3/4	6-3/4	26-1/2	4-1/8	26-1/2	1	1	4-1/2	44	20	57-1/4
3-IBT.600-300-300-G18	266-1/4	57-3/4	54-3/8	57-1/16	56-3/8	51-13/16	5-1/4	34-3/16	10-3/4	2-11/16	102-3/16	84	35	144-7/16	183-3/4	28	8	7	4-1/2	30	27-1/2	31	18-1/2	8-3/4	6-3/4	26-1/2	4-1/8	26-1/2	1	2	4-1/2	44	20	57-1/4
3-IBT.800-400-400-G18	266-1/4	57-3/4	54-3/8	57-1/16	56-3/8	51-13/16	5-1/4	34-3/16	10-3/4	2-11/16	102-3/16	84	35	144-7/16	183-3/4	28	8	7	4-1/2	30	27-1/2	31	18-1/2	8-3/4	6-3/4	26-1/2	4-1/8	26-1/2	1	2	4-1/2	44	20	57-1/4
4-IBT.400-920	303-11/16	57-3/4	60-7/16	57-1/16	64-3/8	51-13/16	5-1/4	47-1/4	10-3/4	2-11/16	121-1/4	42	42	175-9/16	223-7/16	33	10	11	8	36	28-1/2	34	18-1/2	8-3/4	8-1/2	26-1/2	4-1/8	26-1/2	1	1	4-1/2	41-1/8	23-1/2	52-7/8
4-IBT.800-400-400-920	303-11/16	57-3/4	60-7/16	57-1/16	64-3/8	51-13/16	5-1/4	47-1/4	10-3/4	2-11/16	121-1/4	42	42	175-9/16	223-7/16	33	10	11	8	36	28-1/2	34	18-1/2	8-3/4	8-1/2	26-1/2	4-1/8	26-1/2	1	2	4-1/2	41-1/8	23-1/2	52-7/8

UNIT INFORMATION

MODEL	BTU RANGE (MBH)**			TURNDOWN RATIO	COMBUSTION EFFICIENCY***	GAS PRESSURE****		STANDARD EVAPORATIVE COOLING UNIT					CELDEK EVAPORATIVE COOLING UNIT					V-BANK INFORMATION
	BURNER INPUT	BTU LOW	BTU HIGH			MIN	MAX	TOT. WEIGHT	MEDIA SIZE & QTY	VEL. @ MAX. CFM	NOZZLES	MAX. FLOW RATE	TOT. WEIGHT	MEDIA SIZE & QTY	VEL. @ MAX. CFM	NOZZLES	MAX. FLOW RATE	FILTER SIZE & QTY
1-IBT.150-G10	150	20	120	6	80.0%	7" WC	14" WC	1532 LBS	20"x25"x2" (3)	406 FPM	6	3 GPH	1537 LBS	20"x24"x12"	1050 FPM	12	3.9 GPH	20"x25"x2" (3)
1-IBT.200-G10	200	26.7	160	6	80.0%	7" WC	14" WC	1562 LBS	20"x25"x2" (3)	406 FPM	6	3 GPH	1567 LBS	20"x24"x12"	1050 FPM	12	3.9 GPH	20"x25"x2" (3)
1-IBT.300-150-150-G10	300	20	240	12	80.0%	7" WC	14" WC	1617 LBS	20"x25"x2" (3)	406 FPM	6	3 GPH	1622 LBS	20"x24"x12"	1050 FPM	12	3.9 GPH	20"x25"x2" (3)
1-IBT.400-200-200-G10	400	26.7	320	12	80.0%	7" WC	14" WC	1691 LBS	20"x25"x2" (3)	406 FPM	6	3 GPH	1696 LBS	20"x24"x12"	1050 FPM	12	3.9 GPH	20"x25"x2" (3)
2-IBT.200-G15	200	26.7	160	6	80.0%	7" WC	14" WC	1955 LBS	16"x20"x2" (8)	429 FPM	10	5 GPH	1950 LBS	25"x32"x12"	1080 FPM	20	6.5 GPH	16"x20"x2" (8)
2-IBT.300-G15	300	40	240	6	80.0%	7" WC	14" WC	2047 LBS	16"x20"x2" (8)	429 FPM	10	5 GPH	2042 LBS	25"x32"x12"	1080 FPM	20	6.5 GPH	16"x20"x2" (8)
2-IBT.400-G15	400	53.3	320	6	80.0%	7" WC	14" WC	2126 LBS	16"x20"x2" (8)	429 FPM	10	5 GPH	2121 LBS	25"x32"x12"	1080 FPM	20	6.5 GPH	16"x20"x2" (8)
2-IBT.400-200-200-G15	400	26.7	320	12	80.0%	7" WC	14" WC	2014 LBS	16"x20"x2" (8)	429 FPM	10	5 GPH	2009 LBS	25"x32"x12"	1080 FPM	20	6.5 GPH	16"x20"x2" (8)
2-IBT.600-300-300-G15	600	40	480	12	80.0%	7" WC	14" WC	2168 LBS	16"x20"x2" (8)	429 FPM	10	5 GPH	2163 LBS	25"x32"x12"	1080 FPM	20	6.5 GPH	16"x20"x2" (8)
2-IBT.800-400-400-G15	800	53.3	640	12	80.0%	7" WC	14" WC	2281 LBS	16"x20"x2" (8)	429 FPM	10	5 GPH	2276 LBS	25"x32"x12"	1080 FPM	20	6.5 GPH	16"x20"x2" (8)
3-IBT.400-G18	400	53.3	320	6	80.0%	7" WC	14" WC	2692 LBS	20"x25"x2" (8)	348 FPM	14	7 GPH	2682 LBS	30"x36"x12"	1067 FPM	28	8.4 GPH	20"x25"x2" (8)
3-IBT.600-300-300-G18	600	40	480	12	80.0%	7" WC	14" WC	2810 LBS	20"x25"x2" (8)	348 FPM	14	7 GPH	2800 LBS	30"x36"x12"	1067 FPM	28	8.4 GPH	20"x25"x2" (8)
3-IBT.800-400-400-G18	800	53.3	640	12	80.0%	7" WC	14" WC	2948 LBS	20"x25"x2" (8)	348 FPM	14	7 GPH	2938 LBS	30"x36"x12"	1067 FPM	28	8.4 GPH	20"x25"x2" (8)
4-IBT.400-920	400	53.3	320	6	80.0%	7" WC	14" WC	3919 LBS	16"x20"x2" (15)	572 FPM	24	12 GPH	3789 LBS	38"x43"x12"	1322 FPM	35	10.15 GPH	16"x20"x2" (15)
4-IBT.800-400-400-920	800	53.3	640	12	80.0%	7" WC	14" WC	4702 LBS	16"x20"x2" (15)	572 FPM	24	12 GPH	4682 LBS	38"x43"x12"	1322 FPM	35	10.15 GPH	16"x20"x2" (15)

ADD CONDENSING UNIT WEIGHT
O WEIGHT IN TABLE ABOVE

* ALL MODELS ARE FULLY
ELECTRONICALLY MODULATING

** COMBUSTION EFFICIENCY
F EVERY UNIT IS 80.0% OVER
HE ENTIRE GAS FIRING RANGE.

*** GAS PRESSURES IN TABLE ARE
OR NATURAL GAS, LP MINIMUM GAS
NLET PRESSURE = 11" W.C.

**** MAX. EVAP WATER PRESSURE

CONDENSER INFORMATION						
MODEL	WEIGHT*	TONNAGE #1	TONNAGE #2	CC	DD	EE
2 TON-G10	119 LBS	2 TON	N/A	26-5/16	56-1/16	52-3/8
3 TON-G10	134 LBS	3 TON	N/A	33-5/16	63-1/16	59-3/8
5 TON-G10	253 LBS	2 TON	3 TON	33-5/16	63-1/16	59-3/8
5 TON-G10	302 LBS	2.5 TON	2.5TON	32-13/16	62-9/16	58-7/8
5 TON-G15	197 LBS	5 TON	N/A	32-13/16	69-9/16	65-7/8
7.5 TON-G15	348 LBS	2.5 TON	5 TON	32-13/16	69-9/16	65-7/8
8 TON-G15	331 LBS	3 TON	5 TON	33-5/16	71-11/16	68
10 TON-G15	394 LBS	5 TON	5 TON	32-13/16	69-9/16	65-7/8
10 TON-G18	394 LBS	5 TON	5 TON	32-13/16	76-3/16	70-7/8
10 TON-920	394 LBS	5 TON	5 TON	32-13/16	97-3/16	91-15/16

R410A REFRIGERANT

OPTIONAL MIXING BOX FILTERS	
MODEL	FILTER SIZE & QTY
G10	10"x16"x2" (3)
G15	20"x25"x2" (2), 16"x25"x2" (1)
G18	15"x20"x2" (4), 15"x15"x2" (2)
920	18"x25"x2" (4), 16"x20"x2" (2)