


MODULAR OUTDOOR DOWN DISCHARGE ELECTRIC HEATER PACKAGED UNIT WITH COOLING, V-BANK AND SCREEN INTAKE


STVBSHACDDP-HPU
REV.#7 06/15/2015

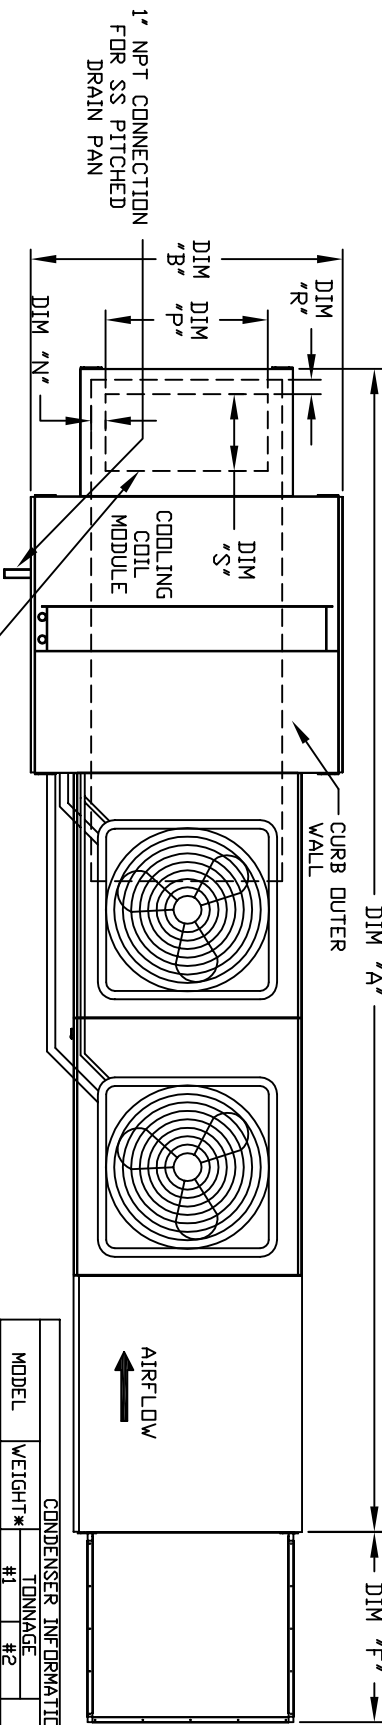

DISCHARGES IN CLEARANCE REQUIRED ABOVE CONDENSERS

MODEL	WEIGHT*	CONDENSER INFORMATION		CC	DD	EE
		#1	#2			
2 TON-G10	119 LBS	2 TON	N/A	26-5/16	56-1/16	52-3/8
3 TON-G10	134 LBS	3 TON	N/A	33-5/16	63-1/16	59-3/8
5 TON-G10	253 LBS	2 TON	3 TON	33-5/16	63-1/16	59-3/8
5 TON-G10	302 LBS	2.5 TON	2.5 TON	32-13/16	62-9/16	58-7/8
5 TON-G15	197 LBS	5 TON	N/A	32-13/16	69-9/16	65-7/8
7.5 TON-G15	348 LBS	2.5 TON	5 TON	32-13/16	69-9/16	65-7/8
8 TON-G15	331 LBS	3 TON	5 TON	33-5/16	71-11/16	68
10 TON-G15	394 LBS	5 TON	5 TON	32-13/16	69-9/16	65-7/8
10 TON-G18	394 LBS	5 TON	5 TON	32-13/16	76-3/16	70-7/8
10 TON-920	394 LBS	5 TON	5 TON	32-13/16	97-3/16	91-15/16

R410A REFRIGERANT

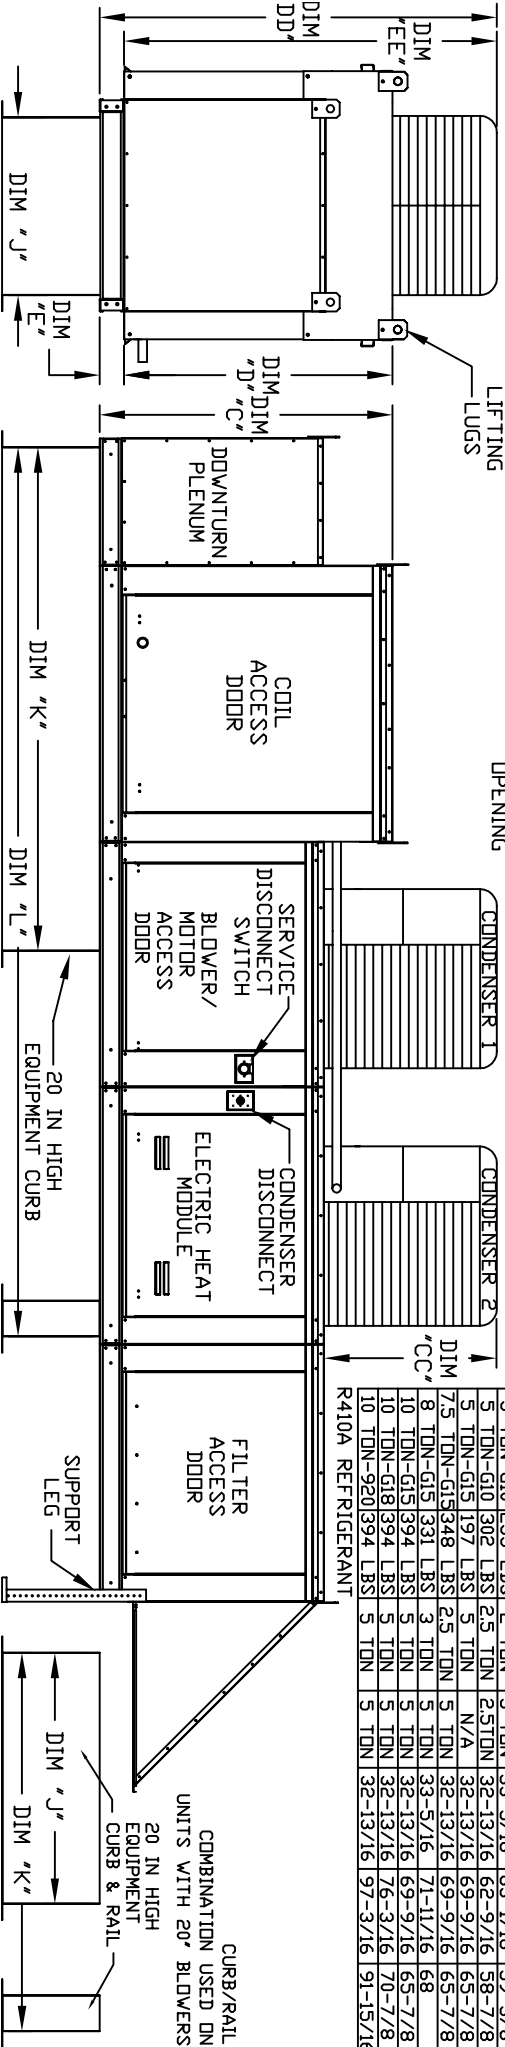

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MAX. ROOF OPENING 2\"/>

MODEL	WEIGHT	UNIT DIMENSIONS											CURB/RAIL	DISCHARGE OPENING				
		A	B	C	D	E	F	G	H	I	J	K		L	N	P	R	S
E1-G10	1060 LBS	167-1/4	39-3/8	42-3/4	39	3-3/4	22-3/8	21	71	131-5/8	3-9/16	13-7/8	1-13/16	11-1/2				
E2-G15	1455 LBS	181-1/4	49-3/8	47-3/4	44	3-3/4	30-5/16	31	79	145-5/8	4-5/16	22-3/8	1-9/16	18				
E3-G18	1745 LBS	192-1/4	54-3/8	56-3/8	51-1/8	5-1/4	34-3/16	35	84	150-5/8	6-5/16	22-3/8	1-1/2	18				
E4-920	2730 LBS	238-9/16	60-7/16	64-3/8	59-1/8	5-1/4	47-1/4	42	115-3/16	199-7/8	5-1/4	31-1/2	1-13/16	23-1/2				

UNIT INFORMATION

MODEL	TONNAGE RANGE		FILTER SIZE & QTY		MAX. FILTER VELOCITY
	MIN	MAX			
E1-G10	2 Ton	5 Ton	20"x25"x2" (3)	3	3600 CFM = 418 FPM
E2-G15	5 Ton	10 Ton	16"x20"x2" (8)	8	6500 CFM = 464 FPM
E3-G18	10 Ton	10 Ton	20"x25"x2" (8)	8	8000 CFM = 348 FPM
E4-920	10 Ton	10 Ton	16"x20"x2" (15)	15	21300 CFM = 495 FPM

WARNING: REFRIGERANT UNIT VENTILATE THE VENTILATE IN TANK F. APPROX.