



MODULAR OUTDOOR DOWN DISCHARGE ELECTRIC HEATER-ROOF TOP PACKAGE WITH COOLING, V-BANK AND SCREEN INTAKE

SIVBENSAACCPRTF-4PU-1  
REV.#3 06/15/2015

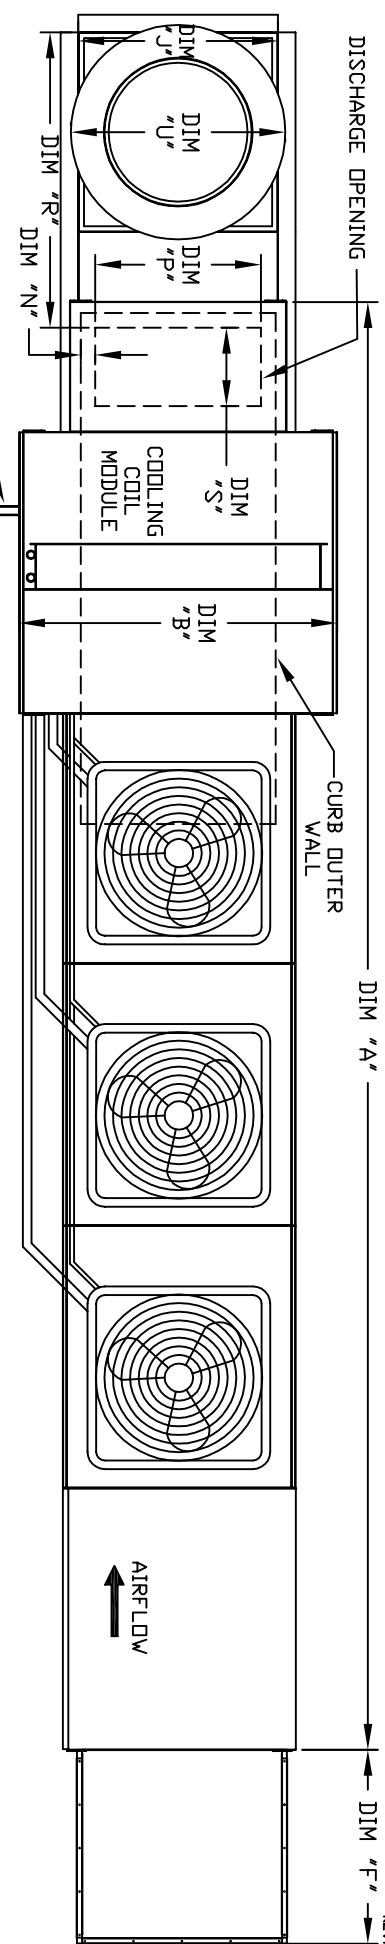

1" NPT CONNECTION FOR SS PITCHED DRAIN PAN

48 IN CLEARANCE REQUIRED ABOVE CONDENSERS

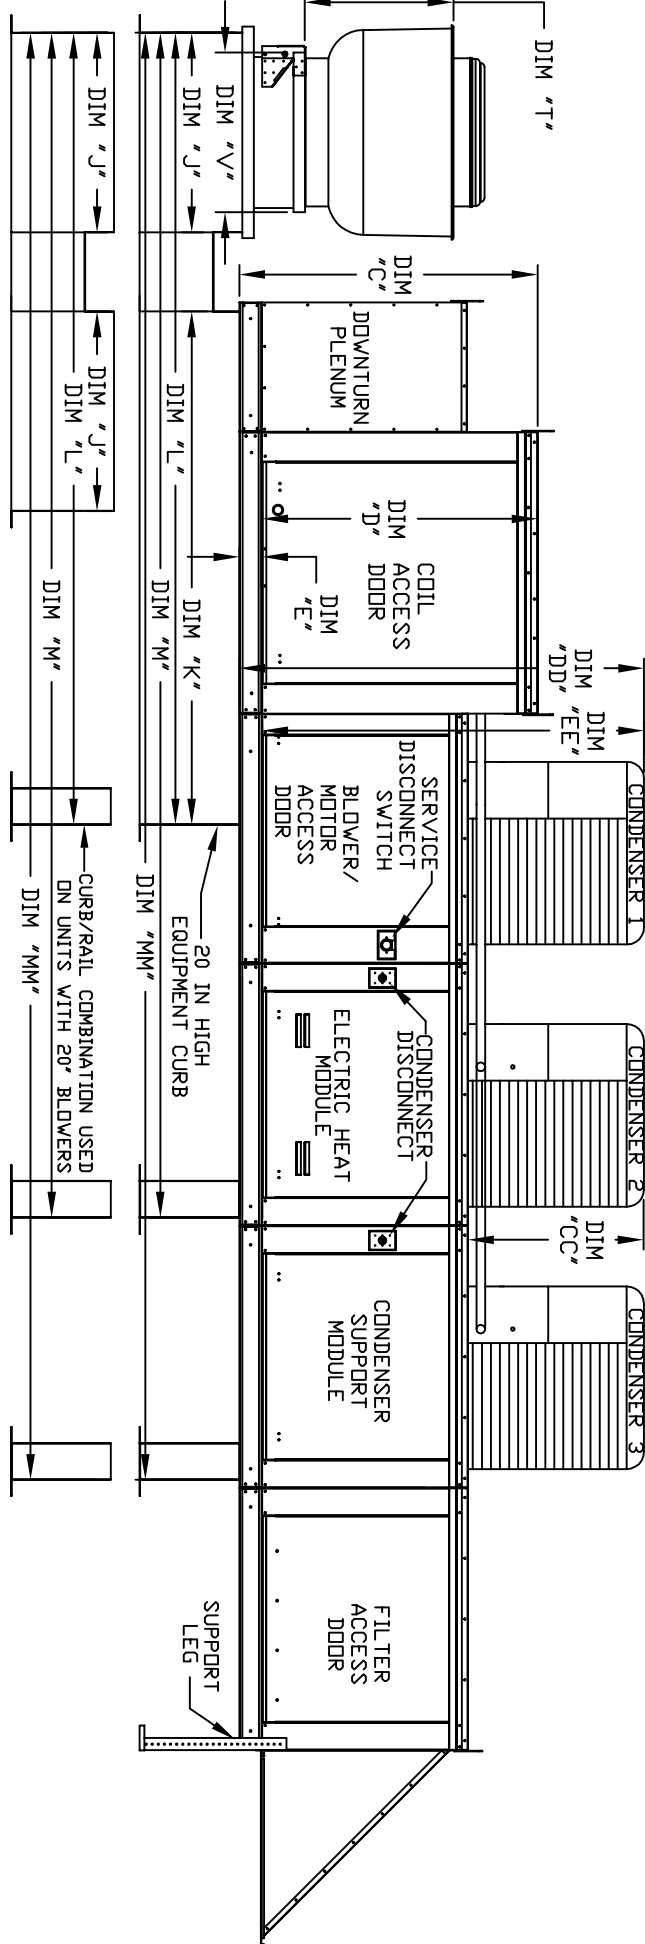

\*\*9 INCH HIGH EXHAUST ADAPTER MAY BE REQUIRED

MODEL #	T	U	V**
DU12	14-1/2	22	19
DU11	18-1/2	27-1/4	21
DU10	21-1/2	30-1/4	21
DU9	23	33-3/4	24-3/4
DU8	23-1/2	39-3/8	28
DU7	29-1/2	38-7/8	28
DU6	30-5/8	43-3/8	33
DU5	33-1/2	52-3/4	40

MODEL	WEIGHT	A	B	C	D	E	F	J	K	L	M	MM	N	P	R	S
E3-G18	1755 LBS	234-1/2	54-3/8	56-3/8	51-1/8	5-1/4	34-3/16	35	84	133	199-5/8	241-7/8	6-5/16	22-3/8	49-1/2	18
E4-920	2765 LBS	292-7/8	60-7/16	64-3/8	59-1/8	5-1/4	47-1/4	42	115-3/16	171-3/16	255-13/16	310-1/8	5-1/4	31-1/2	56-13/16	23-1/2

MODEL	MIN	MAX	FILTER SIZE & QTY	MAX. FILTER VELOCITY
E3-G18	15 Ton	15 Ton	20"x25"x2" (8)	8800 CFM = 348 FPM
E4-920	15 Ton	15 Ton	16"x20"x2" (15)	81300 CFM = 495 FPM

MODEL	WEIGHT*	#1	#2	#3	CC	DD	EE
15 TON-G18	1591 LBS	5 TON	5 TON	5 TON	32-13/16	76-3/16	70-7/8
15 TON-G20	1591 LBS	5 TON	5 TON	5 TON	32-13/16	67-3/16	61-15/16

\*ADD CONDENSING UNIT WEIGHT TO WEIGHT IN TABLE ABOVE

MAX. ROOF OPENING 2" SMALLER THAN CURB OUTSIDE DIMENSION

R410A REFRIGERANT

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.