
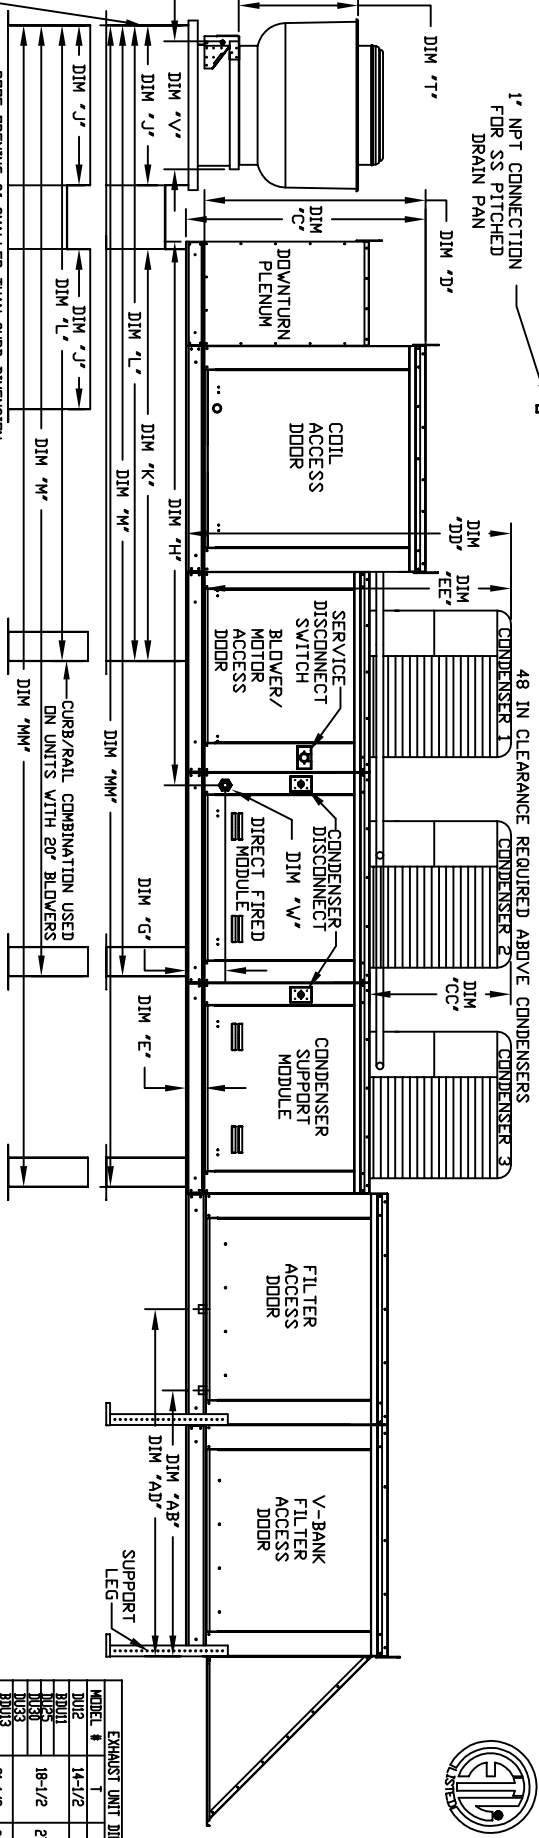


MODULAR OUTDOOR DOWN DISCHARGE DIRECT FIRED HEATER-ROOF TOP PACKAGE WITH COOLING, LPD EVAPORATIVE COOLER INTAKE, V-BANK AND SCREEN INTAKE

STV-BL-PRECOR-544-DCRRT-7-4WU-15  
REV. A3 06/15/2015

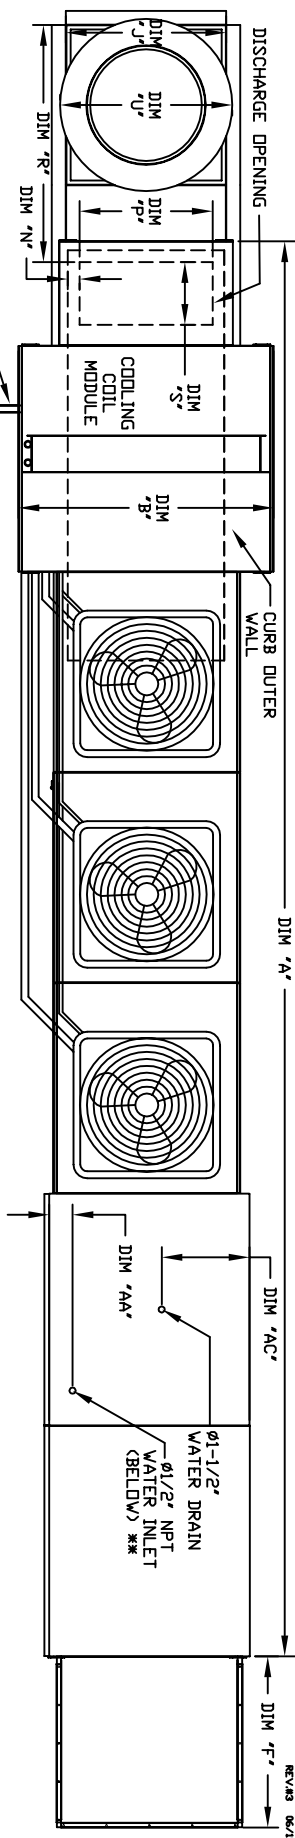

\*\*\* 9 INCH HIGH EXHAUST ADAPTER MAY BE REQUIRED

20 INCH HIGH EQUIPMENT CURB

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

CONDENSER INFORMATION

MODEL	WEIGHT#	#1	#2	#3	CC	DD	EE
15 TON-G18/S91	5 TON	5 TON	5 TON	5 TON	32-13/16	76-3/16	70-7/8
15 TON-920/S91	5 TON	5 TON	5 TON	5 TON	32-13/16	97-3/16	91-15/16

CONDENSER INFORMATION

MODEL	BTU RANGE (QBD)	BTU HIGH	MIN.	MAX.	GAS CONNECTION	GAS CONNECTION	TONnage RANGE	MIN.	MAX.	
D-500-G18	267	54-3/8	56-3/8	51-1/8	5-1/4	47-1/4	3-1/2	114-7/16	35	84
D-750-G18	267	54-3/8	56-3/8	51-1/8	5-1/4	47-1/4	3-1/2	114-7/16	35	84
D-1000-G18	267	54-3/8	56-3/8	51-1/8	5-1/4	47-1/4	3-1/2	114-7/16	35	84
D-1500-920	327-1/4	60-7/16	64-3/8	59-1/8	5-1/4	49-3/8	3-1/2	115-3/16	111-3/16	133
D-1500-920	327-1/4	60-7/16	64-3/8	59-1/8	5-1/4	49-3/8	3-1/2	115-3/16	111-3/16	133

CELUX EVAPORATIVE COOLING UNIT


MODEL	WEIGHT	HEAD SIZE & QTY	NOZZLES	MAX. FLOW RATE
2170 LBS	38"x43"x12"	35	35	1015 GPH
2175 LBS	38"x43"x12"	35	35	1015 GPH
2180 LBS	38"x43"x12"	35	35	1015 GPH
3220 LBS	45"x54"x12"	42	42	126 GPH
3220 LBS	45"x54"x12"	42	42	126 GPH

DISCHARGE OPENING

MODEL	AA	AB	AC	AD	FILTER SIZE & QTY
D1018	4-1/2	4-1/8	23-1/2	52-7/8	16x20x2" (S)
D1020	4-1/2	4-1/8	23-1/2	52-7/8	16x20x2" (S)
D1024	4-1/2	4-1/8	23-1/2	52-7/8	16x20x2" (S)
D1028	4-1/2	4-1/8	23-1/2	52-7/8	20x25x2" (S)
D1030	4-1/2	4-1/8	23-1/2	52-7/8	20x25x2" (S)

EXHAUST UNIT DIMENSIONS

MODEL	T	U	V	W
D1018	14-1/2	2	2	19
D1020	18-1/2	27-1/4	21	
D1024	21-1/2	30-1/4	21	
D1028	23	33-3/4	24-3/4	
D1030	23-1/2	35-3/8	28	
D1032	29-1/2	38-7/8	28	
D1034	30-5/8	43-3/8	33	
D1036	33-1/2	52-3/4	40	



Direct Fired (DF) Profile Plate Assembly