


MODULAR OUTDOOR SIDE DISCHARGE ELECTRIC HEATER PACKAGED UNIT WITH COOLING, LPD EVAPORATIVE COOLER INTAKE, V-BANK AND SCREEN INTAKE

STVALPCECHSACC-HEU-15
REV#2 06/15/2015

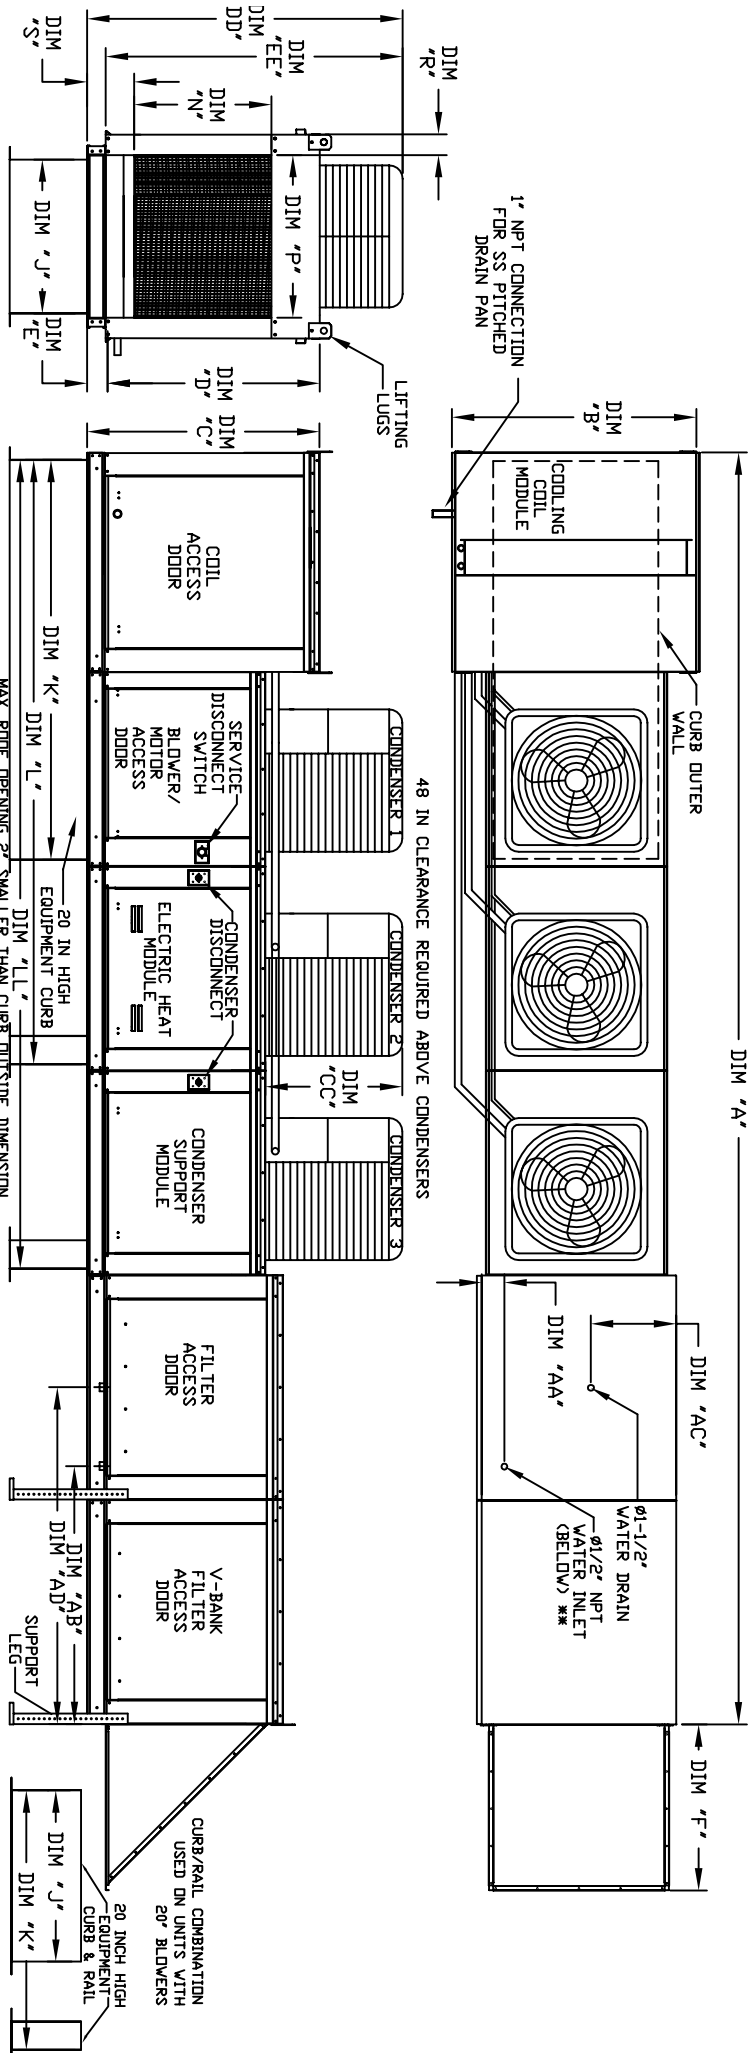

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	UNIT DIMENSIONS										CURB/RAIL	DISCHARGE OPENING				WATER INLET DRAIN OPENING				FILTER SIZE & QTY	
	A	B	C	D	E	F	J	K	L	N		P	R	S	AA	AB	AC	AD	AE	AF	
E3-G18	242-5/8	54-3/8	56-3/8	51-1/8	5-1/4	47-1/4	35	84	126-1/4	168-1/2	29-5/8	30	11-1/2	41-1/2	1/8	23-1/2	152-7/8	16"x20"x2" (15)	16"x20"x2" (15)		
E4-920	297-7/8	60-7/16	64-3/8	59-1/8	5-1/4	49-5/8	42	115-3/16	169-1/2	223-13/16	36-3/4	34	12-1/2	7-3/8	4-1/2	1/8	152-7/8	16"x20"x2" (15)	16"x20"x2" (15)		

MODEL	TONNAGE RANGE		TOT. WEIGHT MEDIA SIZE & QTY		MAX. FLOW RATE	
	MIN	MAX	TONS	LBS	GPM	GPH
E3-G18	15 Ton	15 Ton	2035	38"x43"x12"	35	1015 GPH
E4-920	15 Ton	15 Ton	3035	45"x54"x12"	42	126 GPH

UNIT INFORMATION: CELEDEK EVAPORATIVE COOLING UNIT

CONDENSER INFORMATION: **ADD CONDENSING UNIT WEIGHT TO WEIGHT IN TABLE ABOVE ** MAX EVAP WATER PRESSURE = 50 PSI @ 70 DEG F

MAX. ROOF OPENING 2" SMALLER THAN CURB OUTSIDE DIMENSION

20 INCH HIGH EQUIPMENT CURB & RAIL

CURB/RAIL COMBINATION USED ON UNITS WITH 20" BLOWERS