
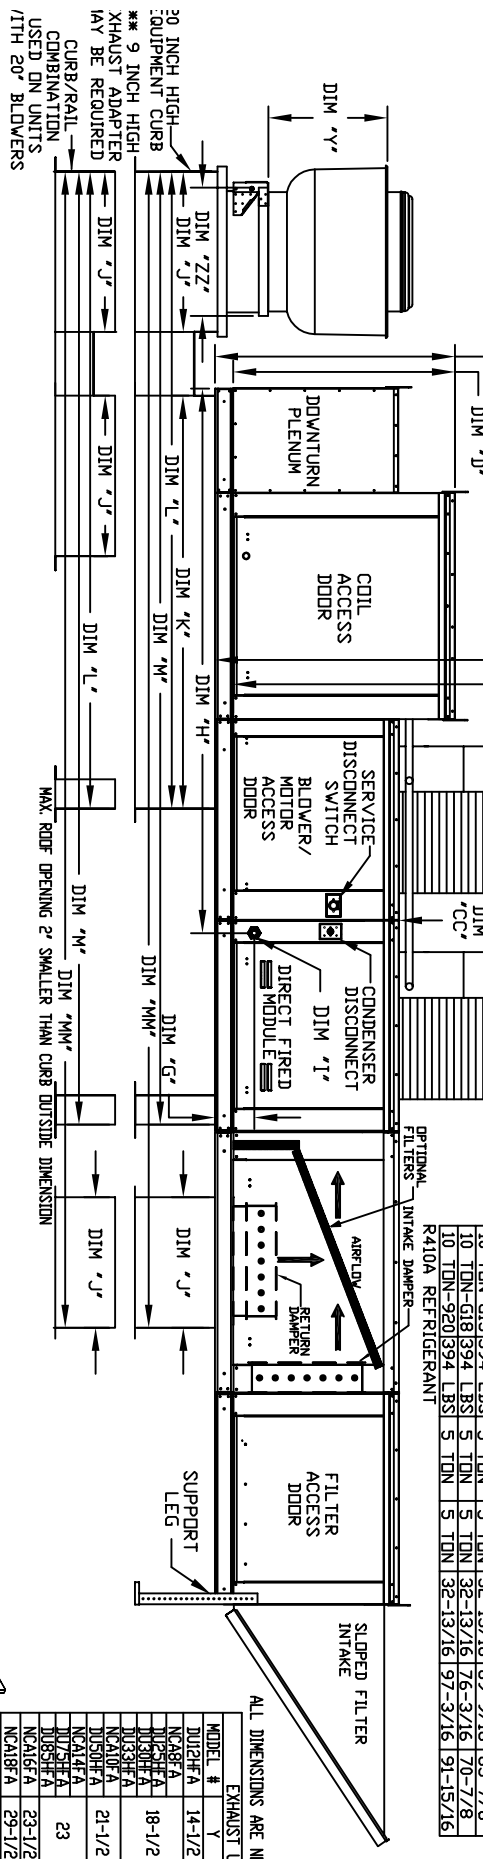


MODULAR OUTDOOR DOWN DISCHARGE DIRECT FIRED RECIRCULATING HEATER-ROOF TOP PACKAGE WITH COOLING, V-BANK AND INTAKE HOOD

JHW/MBDS/5ACCC/PP/PF-18/P
REV/4/3 06/15/2015

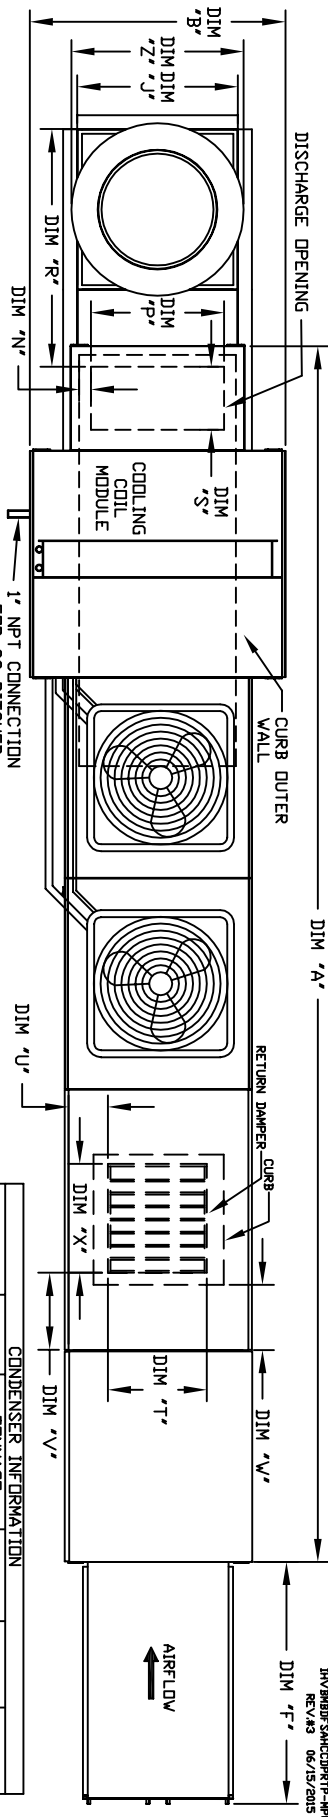

CONDENSER INFORMATION

MODEL	WEIGHT*	#1	#2	CC	DD	EE
2 TON-G10	119 LBS	2 TON	N/A	26-5/16	56-1/16	52-3/8
3 TON-G10	134 LBS	3 TON	N/A	33-5/16	63-1/16	59-3/8
5 TON-G10	253 LBS	2 TON	N/A	33-5/16	63-1/16	59-3/8
5 TON-G10	302 LBS	2.5 TON	N/A	36-13/16	62-9/16	58-7/8
5 TON-G15	197 LBS	2.5 TON	N/A	36-13/16	69-9/16	65-7/8
7.5 TON-G15	348 LBS	2.5 TON	N/A	36-13/16	69-9/16	65-7/8
8 TON-G15	331 LBS	3 TON	N/A	33-5/16	71-11/16	68
10 TON-G15	394 LBS	3 TON	N/A	32-13/16	69-9/16	65-7/8
10 TON-G18	394 LBS	5 TON	N/A	32-13/16	76-3/16	70-7/8
10 TON-G20	394 LBS	5 TON	N/A	32-13/16	97-3/16	91-15/16

*R410A REFRIGERANT

30 INCH HIGH EQUIPMENT CURB
** 9 INCH HIGH EXHAUST ADAPTER MAY BE REQUIRED CURB COMBINATION USED ON UNITS WITH 20" BLOWERS

UNIT DIMENSIONS

MODEL	WEIGHT	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S	T	U	V	X		
1250-G10	1290 LBS	209-1/2	39-3/8	42-3/4	39	3-3/4	44-3/8	7-13/16	95-7/16	21	71	106	166-5/8	198-1/16	3-9/16	13-7/8	36-13/16	11-1/2	14	14	12-1/2	18	
1500-G10	1295 LBS	209-1/2	39-3/8	42-3/4	39	3-3/4	44-3/8	7-13/16	95-7/16	21	71	106	166-5/8	198-1/16	3-9/16	13-7/8	36-13/16	11-1/2	14	14	12-1/2	18	
1750-G15	1735 LBS	223-1/2	49-3/8	47-3/4	44	3-3/4	53-3/8	7-13/16	109-7/16	31	79	124	196-5/8	227-1/16	4-5/16	22-3/8	46-9/16	18	22-3/4	8	11	7-1/2	24
1500-G15	1740 LBS	223-1/2	49-3/8	47-3/4	44	3-3/4	53-3/8	7-13/16	109-7/16	31	79	124	196-5/8	227-1/16	4-5/16	22-3/8	46-9/16	18	22-3/4	8	11	7-1/2	24
1750-G18	1745 LBS	223-1/2	49-3/8	47-3/4	44	3-3/4	53-3/8	7-13/16	109-7/16	31	79	124	196-5/8	227-1/16	4-5/16	22-3/8	46-9/16	18	22-3/4	8	11	7-1/2	24
1500-G18	2060 LBS	234-1/2	54-3/8	51-1/8	39	3-1/4	51-3/8	9-1/2	114-7/16	35	84	133	199-5/8	239-1/16	6-5/16	22-3/8	49-1/2	18	28	8	7	4-1/2	30
1750-G18	2070 LBS	234-1/2	54-3/8	51-1/8	39	3-1/4	51-3/8	9-1/2	114-7/16	35	84	133	199-5/8	239-1/16	6-5/16	22-3/8	49-1/2	18	28	8	7	4-1/2	30
11000-G18	3315 LBS	292-7/8	60-7/16	64-3/8	51-1/8	5-1/4	51-5/8	13-9/16	139-9/16	42	115-3/16	171-3/16	255-7/8	303-7/8	5-1/4	31-1/2	56-13/16	23-1/2	33	10	11	8	36
11500-G20	3330 LBS	292-7/8	60-7/16	64-3/8	51-1/8	5-1/4	51-5/8	13-9/16	139-9/16	42	115-3/16	171-3/16	255-7/8	303-7/8	5-1/4	31-1/2	56-13/16	23-1/2	33	10	11	8	36

UNIT DIMENSIONS

MODEL	BTU RANGE (AMB)	MIN	MAX	GAS CONNECTION	GAS PRESSURE	TONNAGE RANGE	MIN	MAX	FILTER SIZE & QTY	MAX. FILTER VELOCITY
1250-G10	6	18	2/5	7" VC	14" WC	2 Ton	5 Ton	20"x25"x2" (3)	8200 CFM = 348 FPM	
1500-G10	6	18	2/5	7" VC	14" WC	2 Ton	5 Ton	20"x25"x2" (3)	8200 CFM = 348 FPM	
1750-G15	12	18	2/5	7" VC	14" WC	5 Ton	10 Ton	16"x20"x2" (8)	6600 CFM = 428 FPM	
1500-G15	12	18	2/5	7" VC	14" WC	5 Ton	10 Ton	16"x20"x2" (8)	6600 CFM = 428 FPM	
1750-G18	12	18	2/5	7" VC	14" WC	5 Ton	10 Ton	16"x20"x2" (8)	6600 CFM = 428 FPM	
1500-G18	12	18	2/5	7" VC	14" WC	5 Ton	10 Ton	16"x20"x2" (8)	6600 CFM = 428 FPM	
1750-G18	12	18	2/5	7" VC	14" WC	5 Ton	10 Ton	16"x20"x2" (8)	6600 CFM = 428 FPM	
1500-G18	12	18	2/5	7" VC	14" WC	5 Ton	10 Ton	16"x20"x2" (8)	6600 CFM = 428 FPM	
11000-G18	24	36.6	1/4	7" VC	5 PSI	10 Ton	10 Ton	20"x25"x2" (3)	8200 CFM = 348 FPM	
11500-G20	30	45.8	1/4	7" VC	5 PSI	10 Ton	10 Ton	16"x20"x2" (3)	8100 CFM = 348 FPM	
11500-G20	30	45.8	1/4	7" VC	5 PSI	10 Ton	10 Ton	16"x20"x2" (3)	8100 CFM = 348 FPM	

OPTIONAL MIXING BOX FILTERS

MODEL	WEIGHT*	#1	#2	CC	DD	EE
2 TON-G10	119 LBS	2 TON	N/A	26-5/16	56-1/16	52-3/8
3 TON-G10	134 LBS	3 TON	N/A	33-5/16	63-1/16	59-3/8
5 TON-G10	253 LBS	2 TON	N/A	33-5/16	63-1/16	59-3/8
5 TON-G10	302 LBS	2.5 TON	N/A	36-13/16	62-9/16	58-7/8
5 TON-G15	197 LBS	2.5 TON	N/A	36-13/16	69-9/16	65-7/8
7.5 TON-G15	348 LBS	2.5 TON	N/A	36-13/16	69-9/16	65-7/8
8 TON-G15	331 LBS	3 TON	N/A	33-5/16	71-11/16	68
10 TON-G15	394 LBS	3 TON	N/A	32-13/16	69-9/16	65-7/8
10 TON-G18	394 LBS	5 TON	N/A	32-13/16	76-3/16	70-7/8
10 TON-G20	394 LBS	5 TON	N/A	32-13/16	97-3/16	91-15/16

*R410A REFRIGERANT

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES