




OUTSIDE DOWN DISCHARGE MOD PACKAGE UNIT, HEATING COIL, V-BANK FILTER, LPD EVAPORATIVE COOLER INTAKE, SCREEN INTAKE AND OPTIONAL MIXING BOX

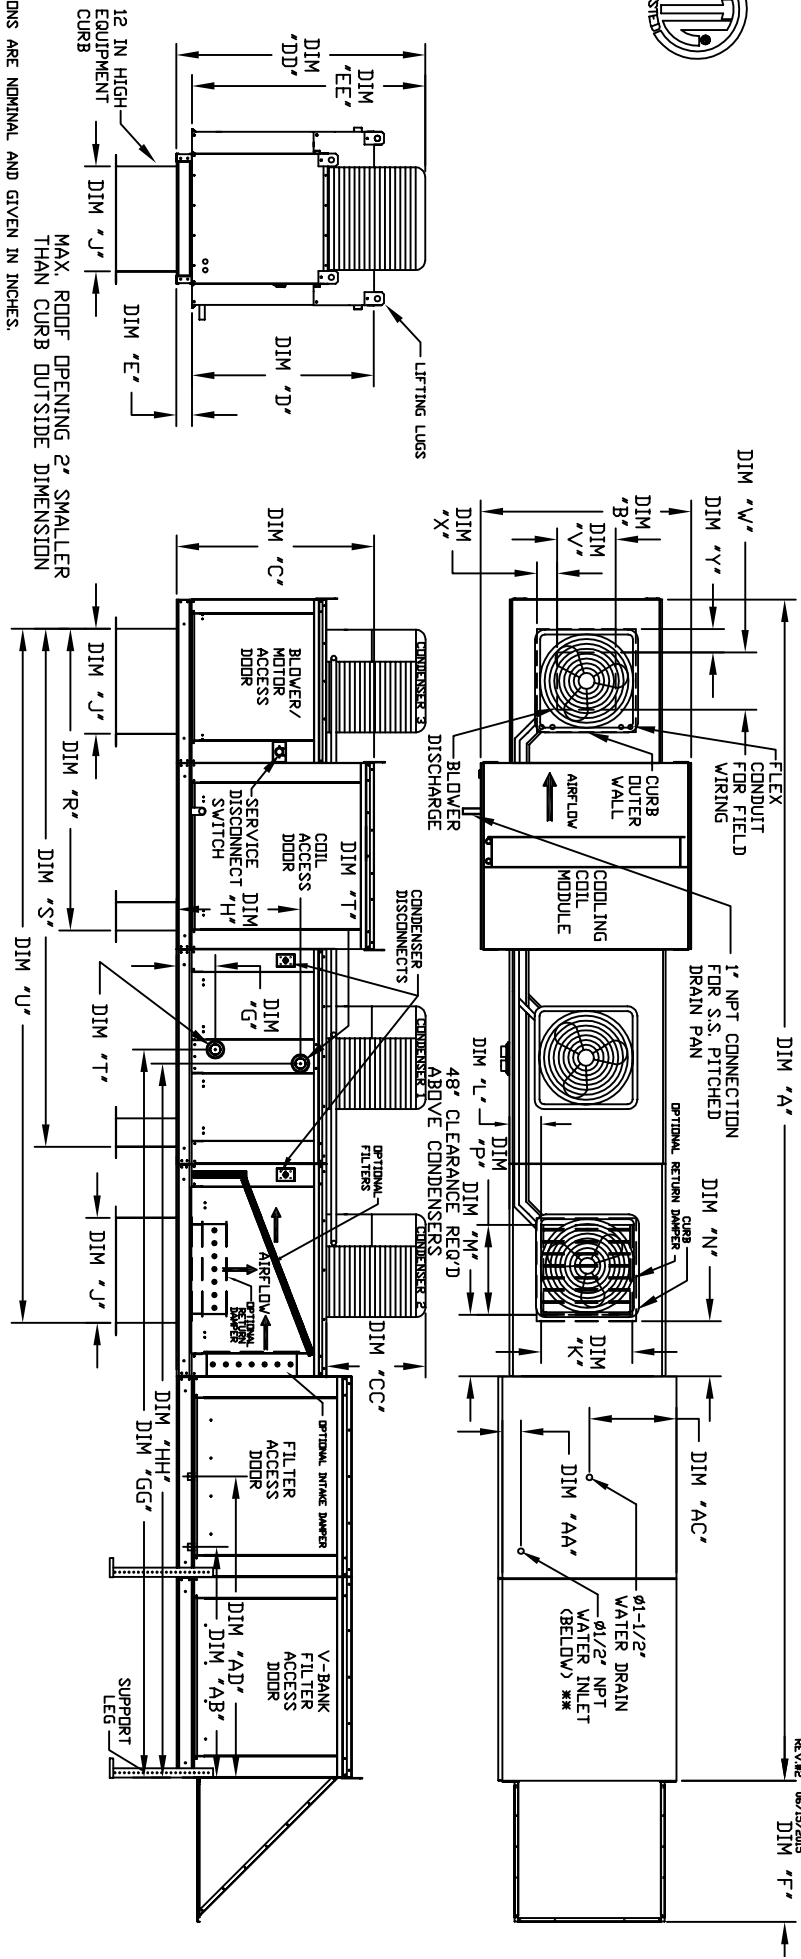

LL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

| MODEL | UNIT DIMENSIONS | | | | | | | | | | | | | DISCHARGE OPENING | | | | | | | | | | | | | TONNAGE RANGE | | WATER INLET DRAIN OPENING | | | |
|-------|-----------------|---------|--------|--------|-------|--------|----|----|----|----|-------|----|----------|-------------------|---------|--------|--------|--------|-------|-----|-----|----|-------|-------|--------|--------|---------------|----|---------------------------|-------|--------|--------|
| | A | B | C | D | E | F | J | K | L | M | N | P | R | S | U | V | W | X | Y | MIN | MAX | AA | AB | AC | AD | | | | | | | |
| G18 | 242-5/8 | 54-3/8 | 56-3/8 | 51-1/8 | 5-1/4 | 47-1/4 | 35 | 28 | 8 | 7 | 4-1/2 | 30 | 79-3/16 | 121-5/16 | 162-3/8 | 22 | 19 | 6-1/2 | 7 | 15 | 15 | 15 | 4-1/2 | 4-1/8 | 23-1/2 | 52-7/8 | 15 | 15 | 4-1/2 | 4-1/8 | 23-1/2 | 52-7/8 |
| 920 | 297-7/8 | 60-7/16 | 64-3/8 | 59-1/8 | 5-1/4 | 49-5/8 | 42 | 33 | 10 | 11 | 8 | 36 | 104-9/32 | 158-15/32 | 208 | 24-7/8 | 24-7/8 | 8-9/16 | 1-1/8 | 15 | 15 | 15 | 4-1/2 | 4-1/8 | 23-1/2 | 52-7/8 | 15 | 15 | 4-1/2 | 4-1/8 | 23-1/2 | 52-7/8 |

| MODEL | TOTAL CAPACITY | | PIPE CONNECTION | | STEAM | | DISCHARGE OPENING | | V-BANK FILTER | | |
|-------|----------------|---------|-----------------|----------|-------|--------|-------------------|--------|---------------|-------|---------------------|
| | QBPH | † (NPT) | † (NPT) | † (NPT) | PSI | G | GG | H | HH | MODEL | FILTER SIZE & QTY |
| G18 | 514.97 | 1-1/2 | 9-1/2 | 135-3/16 | 5 | 10-1/4 | 134-1/16 | 23-5/8 | 134-1/16 | G18 | 16" x 20" x 2" (15) |
| 920 | 831.87 | 2-1/2 | 10 | 153-5/8 | 5 | 10-1/4 | 152-3/16 | 28-5/8 | 152-3/16 | 920 | 20" x 25" x 2" (12) |

HOT WATER COIL MODULE

| MODEL | TOTAL CAPACITY | PIPE CONNECTION | STEAM | DISCHARGE OPENING |
|-------|----------------|-----------------|-------|-------------------|
| G18 | 514.97 | 1-1/2 | 9-1/2 | 135-3/16 |
| 920 | 831.87 | 2-1/2 | 10 | 153-5/8 |

HEATING COIL MODULE

| MODEL | TOTAL CAPACITY | PIPE CONNECTION | STEAM | DISCHARGE OPENING |
|-------|----------------|-----------------|-------|-------------------|
| G18 | 514.97 | 1-1/2 | 9-1/2 | 135-3/16 |
| 920 | 831.87 | 2-1/2 | 10 | 153-5/8 |

OPTIONAL MIXING BOX FILTERS

| MODEL | TOTAL CAPACITY | PIPE CONNECTION | STEAM | DISCHARGE OPENING |
|-------|----------------|-----------------|-------|-------------------|
| G18 | 514.97 | 1-1/2 | 9-1/2 | 135-3/16 |
| 920 | 831.87 | 2-1/2 | 10 | 153-5/8 |

CONDENSER INFORMATION

| MODEL | WEIGHT # | #1 | #2 | #3 | CC | DD | EE |
|------------|----------|-------|-------|-------|----------|---------|----------|
| 15 TON-G18 | 591 LBS | 5 TON | 5 TON | 5 TON | 32-13/16 | 76-3/16 | 70-7/8 |
| 15 TON-920 | 591 LBS | 5 TON | 5 TON | 5 TON | 32-13/16 | 97-3/16 | 91-15/16 |

OPTIONAL MIXING BOX FILTERS

| MODEL | TOTAL CAPACITY | PIPE CONNECTION | STEAM | DISCHARGE OPENING |
|-------|----------------|-----------------|-------|-------------------|
| G18 | 514.97 | 1-1/2 | 9-1/2 | 135-3/16 |
| 920 | 831.87 | 2-1/2 | 10 | 153-5/8 |

STANDARD WATER PRESSURE = 30 PSI @ 70 DEG. F