MODULAR OUTDOOR IBT HEATER WITH MIXING BOX, COOLING COIL, V-BANK AND SCREEN INTAKE

SIVBMBCCSAHIBT-MPU-15
REV.#3 06/15/2015

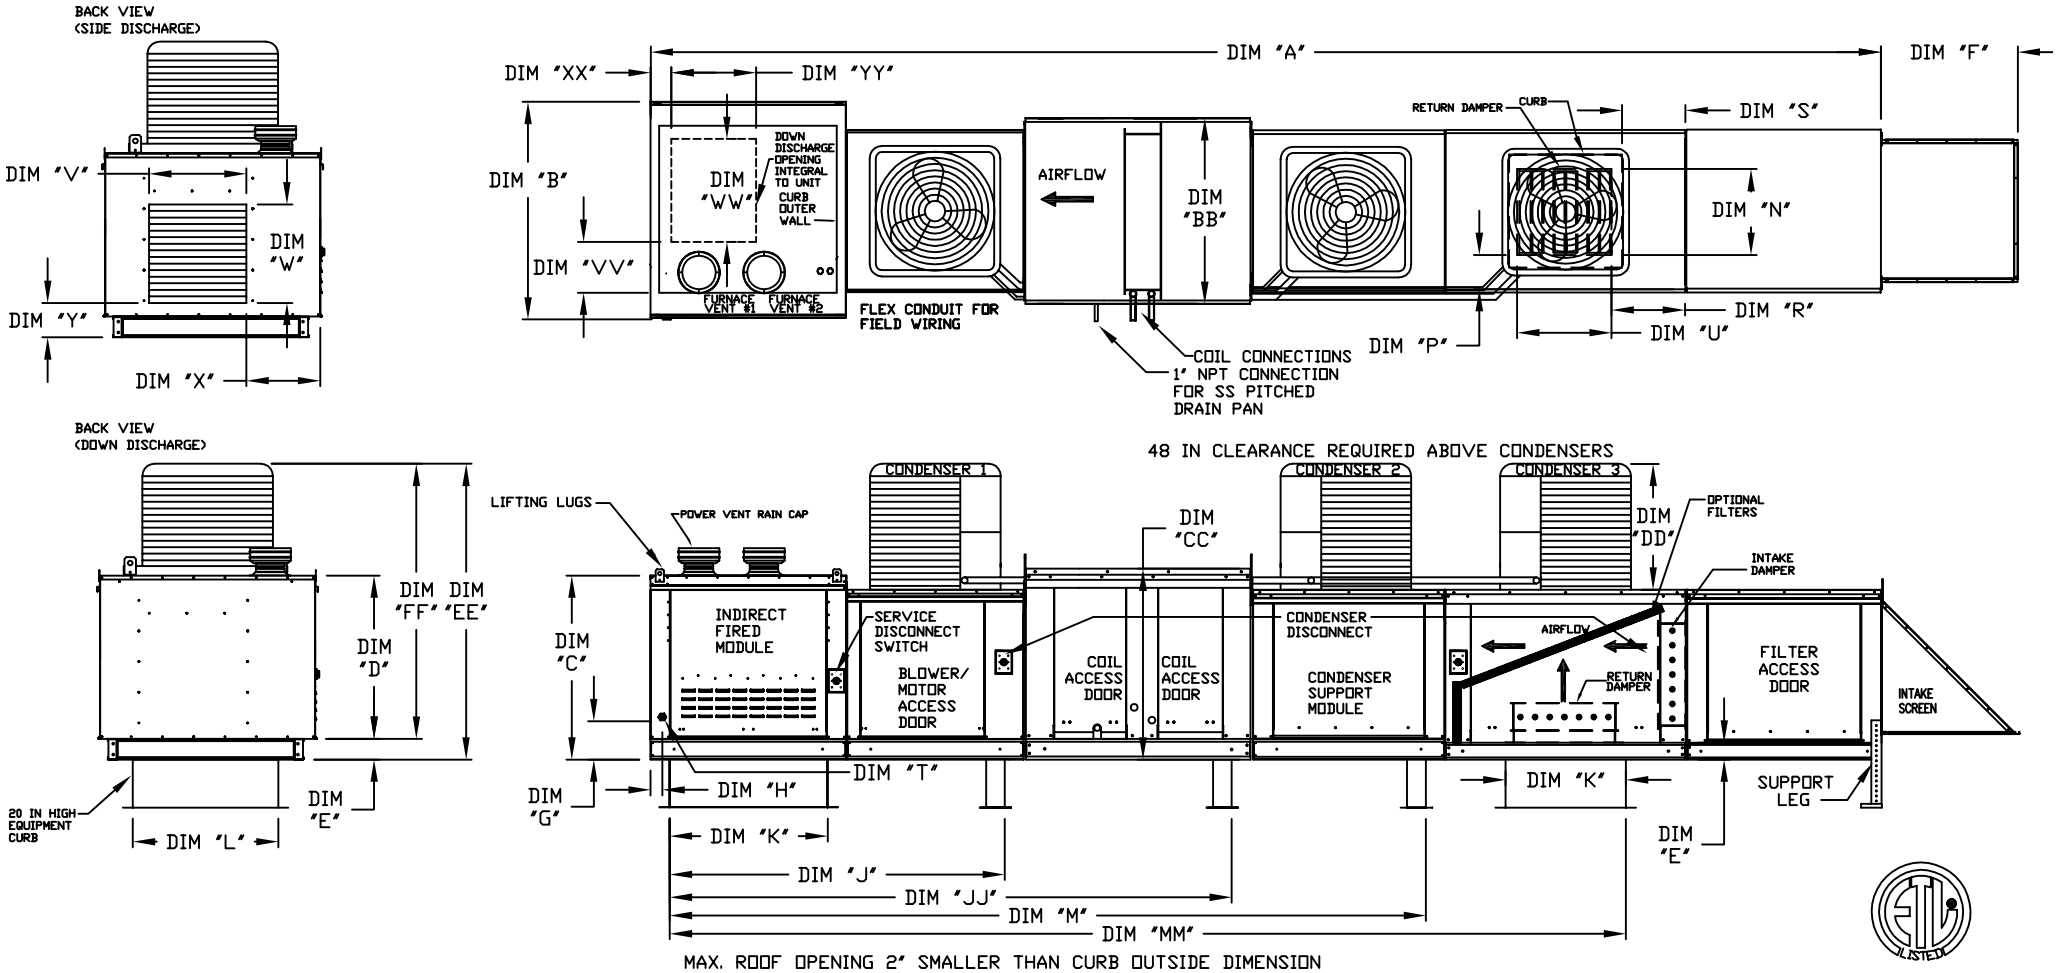

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	WEIGHT (LBS.)	UNIT DIMENSIONS															MIXING BOX OPENING					SIDE DISCHARGE OPENING				DOWN DISCHARGE OPENING				GAS CONNECTION	# OF FURNACES
		A	B	BB	C	CC	D	E	F	G	H	J	K	L	JJ	M	MM	N	P	R	S	U	V	W	X	Y	VV	WW	XX	YY	"T" (NPT)	
3-IBT.400-G18	2462	270-1/4	57-3/4	54-3/8	57-1/16	56-3/8	51-13/16	5-1/4	34-3/16	10-3/4	2-11/16	102-3/16	84	35	144-7/16	186-11/16	225-13/16	28	8	7	4-1/2	30	27-1/2	31	18-1/2	8-3/4	6-3/4	26-1/2	4-1/8	26-1/2	1	1
3-IBT.600-300-300-G18	2580	270-1/4	57-3/4	54-3/8	57-1/16	56-3/8	51-13/16	5-1/4	34-3/16	10-3/4	2-11/16	102-3/16	84	35	144-7/16	186-11/16	225-13/16	28	8	7	4-1/2	30	27-1/2	31	18-1/2	8-3/4	6-3/4	26-1/2	4-1/8	26-1/2	1	2
3-IBT.800-400-400-G18	2718	270-1/4	57-3/4	54-3/8	57-1/16	56-3/8	51-13/16	5-1/4	34-3/16	10-3/4	2-11/16	102-3/16	84	35	144-7/16	186-11/16	225-13/16	28	8	7	4-1/2	30	27-1/2	31	18-1/2	8-3/4	6-3/4	26-1/2	4-1/8	26-1/2	1	2
4-IBT.400-920	3287	322-5/8	57-3/4	60-7/16	57-1/16	64-3/8	51-13/16	5-1/4	47-1/4	10-3/4	2-11/16	121-1/4	42	42	175-9/16	229-7/8	277-9/16	33	10	11	8	36	28-1/2	34	18-1/2	8-3/4	8-1/2	26-1/2	4-1/8	26-1/2	1	1
4-IBT.800-400-400-920	3504	322-5/8	57-3/4	60-7/16	57-1/16	64-3/8	51-13/16	5-1/4	47-1/4	10-3/4	2-11/16	121-1/4	42	42	175-9/16	229-7/8	277-9/16	33	10	11	8	36	28-1/2	34	18-1/2	8-3/4	8-1/2	26-1/2	4-1/8	26-1/2	1	2

UNIT INFORMATION

MODEL	BTU RANGE (MBH)**			TURNDOWN RATIO	COMBUSTION EFFICIENCY***	GAS PRESSURE****	
	BURNER INPUT	BTU LOW	BTU HIGH			MIN	MAX
3-IBT.400-G18	400	53.3	320	6	80.0%	7" WC	14" WC
3-IBT.600-300-300-G18	600	40	480	12	80.0%	7" WC	14" WC
3-IBT.800-400-400-G18	800	53.3	640	12	80.0%	7" WC	14" WC
4-IBT.400-920	400	53.3	320	6	80.0%	7" WC	14" WC
4-IBT.800-400-400-920	800	53.3	640	12	80.0%	7" WC	14" WC

CONDENSER INFORMATION

MODEL	WEIGHT*	TONNAGE			CC	DD	EE
		#1	#2	#3			
15 TON-G18	591 LBS	5 TON	5 TON	5 TON	32-13/16	76-3/16	70-7/8
15 TON-920	591 LBS	5 TON	5 TON	5 TON	32-13/16	97-3/16	91-15/16

:410A REFRIGERANT

MODEL	OPTIONAL MIXING BOX FILTERS FILTER SIZE & QTY
G18	15"x20"x2" (4), 15"x15"x2" (2)
920	18"x25"x2" (4), 16"x20"x2" (2)

* ADD CONDENSING UNIT WEIGHT TO WEIGHT IN TABLE ABOVE

** ALL MODELS ARE FULLY ELECTRONICALLY MODULATING

*** COMBUSTION EFFICIENCY OF EVERY UNIT IS 80.0% OVER THE ENTIRE GAS FIRING RANGE.

**** GAS PRESSURES IN TABLE ARE FOR NATURAL GAS, LP MINIMUM GAS INLET PRESSURE = 11" W.C.