
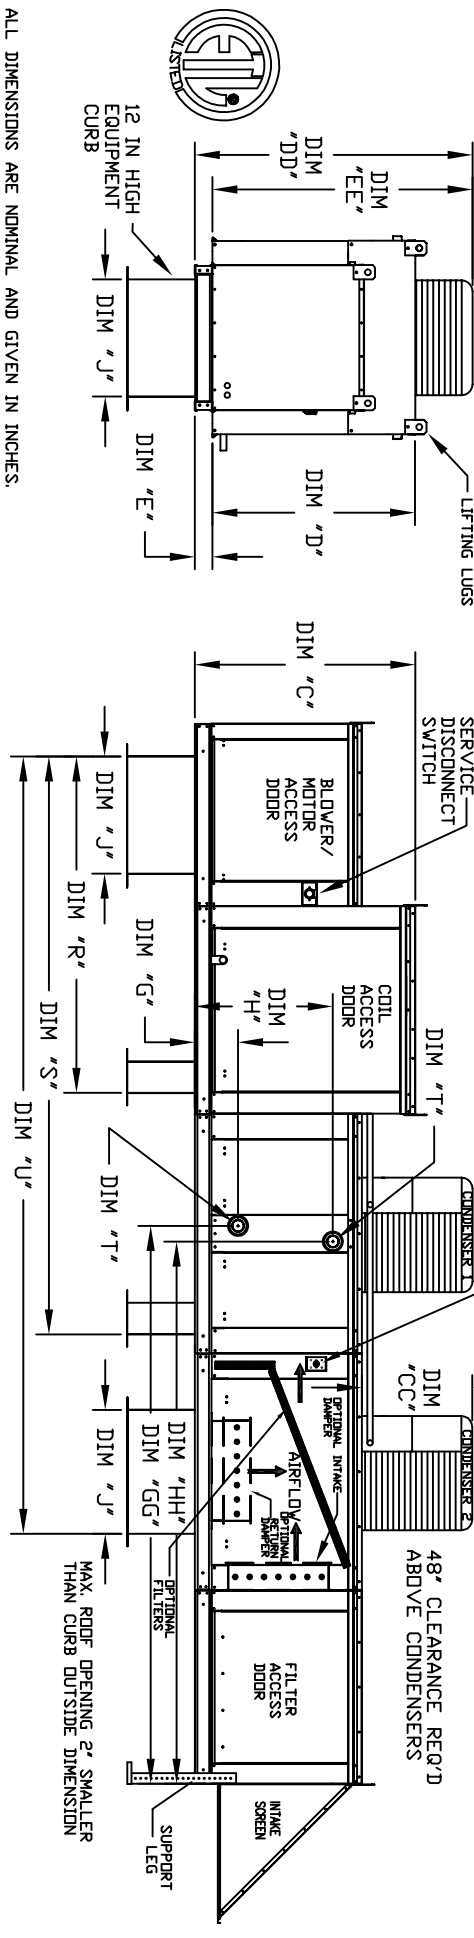


# OUTSIDE DOWN DISCHARGE MOD PACKAGE UNIT, HEATING COIL, V-BANK FILTER, SCREEN INTAKE AND OPTIONAL MIXING BOX

STVBRHC004H-4RU  
REV.#2 06/15/2015

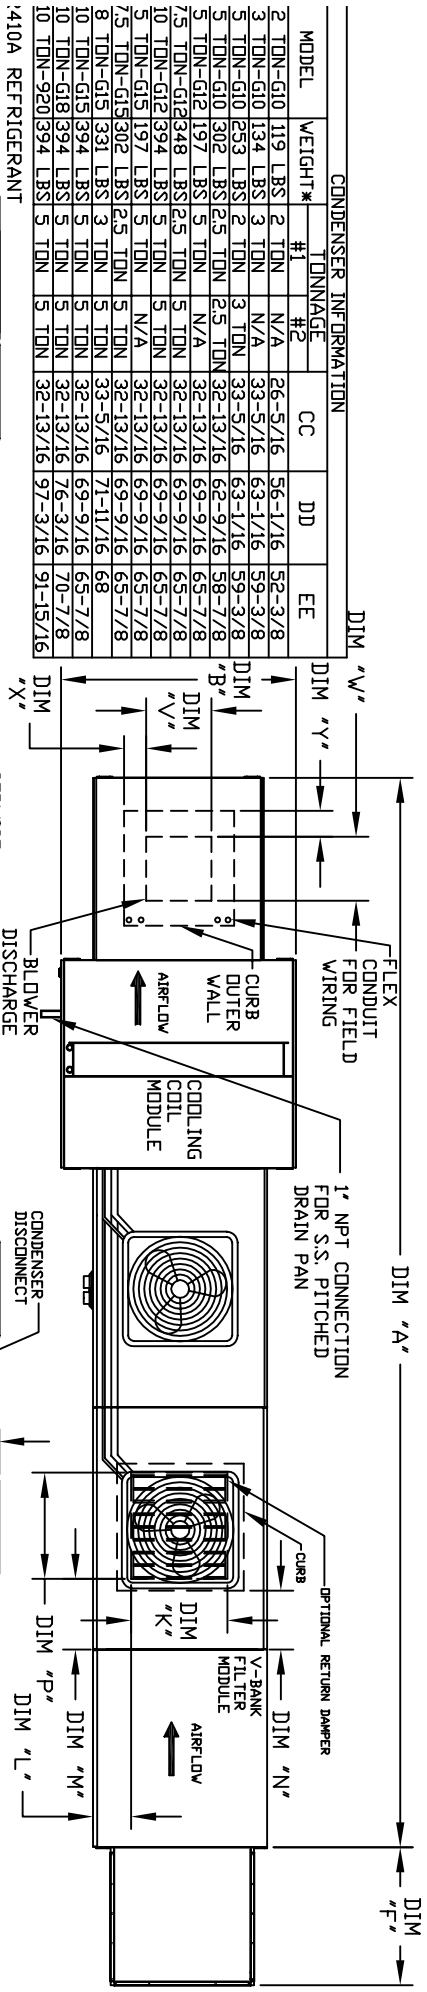

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	UNIT DIMENSIONS											RETURN OPENING											DISCHARGE OPENING											TONNAGE RANGE	
	A	B	C	D	E	F	J	K	L	M	N	P	R	S	U	V	W	X	Y	MIN	MAX	G	GG	H	HH	MIN	MAX								
G10	191-1/8	39-3/8	42-3/4	39	3-3/4	22-3/8	21	14	8	14	12-1/2	18	65-13/16	107-15/16	140-7/8	13-1/4	11-1/2	3-7/8	1-3/4	2	5 Ton	8-3/4	95-9/16	16-15/16	18-3/8	95-9/16									
G12	199-1/8	49-3/8	47-3/4	44	3-3/4	30-5/16	31	22-3/4	8	11	7-1/2	24	74-5/8	116-3/4	154-7/8	15-3/4	13-9/16	7-5/8	7-15/16	5 Ton	8-3/4	95-9/16	18-3/8	18-3/8	95-9/16										
G15	199-1/8	49-3/8	47-3/4	44	3-3/4	30-5/16	31	22-3/4	8	11	7-1/2	24	74-5/8	116-3/4	154-7/8	15-3/4	13-9/16	7-5/8	7-15/16	5 Ton	8-3/4	95-9/16	18-3/8	18-3/8	95-9/16										
G18	214-1/8	54-3/8	56-3/8	51-1/8	5-1/4	34-3/16	35	28	8	7	4-1/2	30	79-3/16	121-5/16	162-3/8	22	22	19	6-1/2	7	10 Ton	10-1/4	101-9/16	23-5/8	101-9/16										
920	281-7/16	60-7/16	64-3/8	59-1/8	5-1/4	47-1/4	42	33	10	11	8	36	104-9/32	158-15/32	208	24-7/8	24-7/8	8-9/16	1-1/8	10 Ton	10-1/4	116-25/32	28-5/8	116-25/32											

MODEL	TOTAL CAPACITY			PIPE CONNECTION			STEAM						
	(AMB)	*T* (MPRT)	G	*T* (MPRT)	PST	G	GG	H	HH				
G10	165.63	2	8-1/4	96-15/16	24-3/4	94-3/16	2-1/2	5	8-3/4	95-9/16	16-15/16	18-3/8	95-9/16
G12	320.88	2	8-1/4	96-15/16	28-3/4	94-3/16	2-1/2	5	8-3/4	95-9/16	18-3/8	18-3/8	95-9/16
G15	320.88	2	8-1/4	96-15/16	28-3/4	94-3/16	2-1/2	5	8-3/4	95-9/16	18-3/8	18-3/8	95-9/16
G18	1695 LBS	514.97	9-1/2	102-11/16	38	100-7/16	2-1/2	5	10-1/4	101-9/16	23-5/8	101-9/16	101-9/16
920	2760 LBS	831.87	10	118-1/4	45-1/2	114-5/8	2-1/2	5	10-1/4	116-25/32	28-5/8	116-25/32	116-25/32

\*ADD CONDENSING UNIT WEIGHT TO WEIGHT IN TABLE ABOVE

MODEL	TOTAL CAPACITY			PIPE CONNECTION			STEAM						
	(AMB)	*T* (MPRT)	G	*T* (MPRT)	PST	G	GG	H	HH				
G10	165.63	2	8-1/4	96-15/16	24-3/4	94-3/16	2-1/2	5	8-3/4	95-9/16	16-15/16	18-3/8	95-9/16
G12	320.88	2	8-1/4	96-15/16	28-3/4	94-3/16	2-1/2	5	8-3/4	95-9/16	18-3/8	18-3/8	95-9/16
G15	320.88	2	8-1/4	96-15/16	28-3/4	94-3/16	2-1/2	5	8-3/4	95-9/16	18-3/8	18-3/8	95-9/16
G18	1695 LBS	514.97	9-1/2	102-11/16	38	100-7/16	2-1/2	5	10-1/4	101-9/16	23-5/8	101-9/16	101-9/16
920	2760 LBS	831.87	10	118-1/4	45-1/2	114-5/8	2-1/2	5	10-1/4	116-25/32	28-5/8	116-25/32	116-25/32

MODEL	TOTAL CAPACITY			PIPE CONNECTION			STEAM						
	(AMB)	*T* (MPRT)	G	*T* (MPRT)	PST	G	GG	H	HH				
G10	165.63	2	8-1/4	96-15/16	24-3/4	94-3/16	2-1/2	5	8-3/4	95-9/16	16-15/16	18-3/8	95-9/16
G12	320.88	2	8-1/4	96-15/16	28-3/4	94-3/16	2-1/2	5	8-3/4	95-9/16	18-3/8	18-3/8	95-9/16
G15	320.88	2	8-1/4	96-15/16	28-3/4	94-3/16	2-1/2	5	8-3/4	95-9/16	18-3/8	18-3/8	95-9/16
G18	1695 LBS	514.97	9-1/2	102-11/16	38	100-7/16	2-1/2	5	10-1/4	101-9/16	23-5/8	101-9/16	101-9/16
920	2760 LBS	831.87	10	118-1/4	45-1/2	114-5/8	2-1/2	5	10-1/4	116-25/32	28-5/8	116-25/32	116-25/32