MODULAR OUTDOOR SIDE DISCHARGE ELECTRIC HEATER WITH COOLING COIL, V-BANK AND INTAKE HOOD

IHVBEHSAHCC
REV.#4 01/02/2012

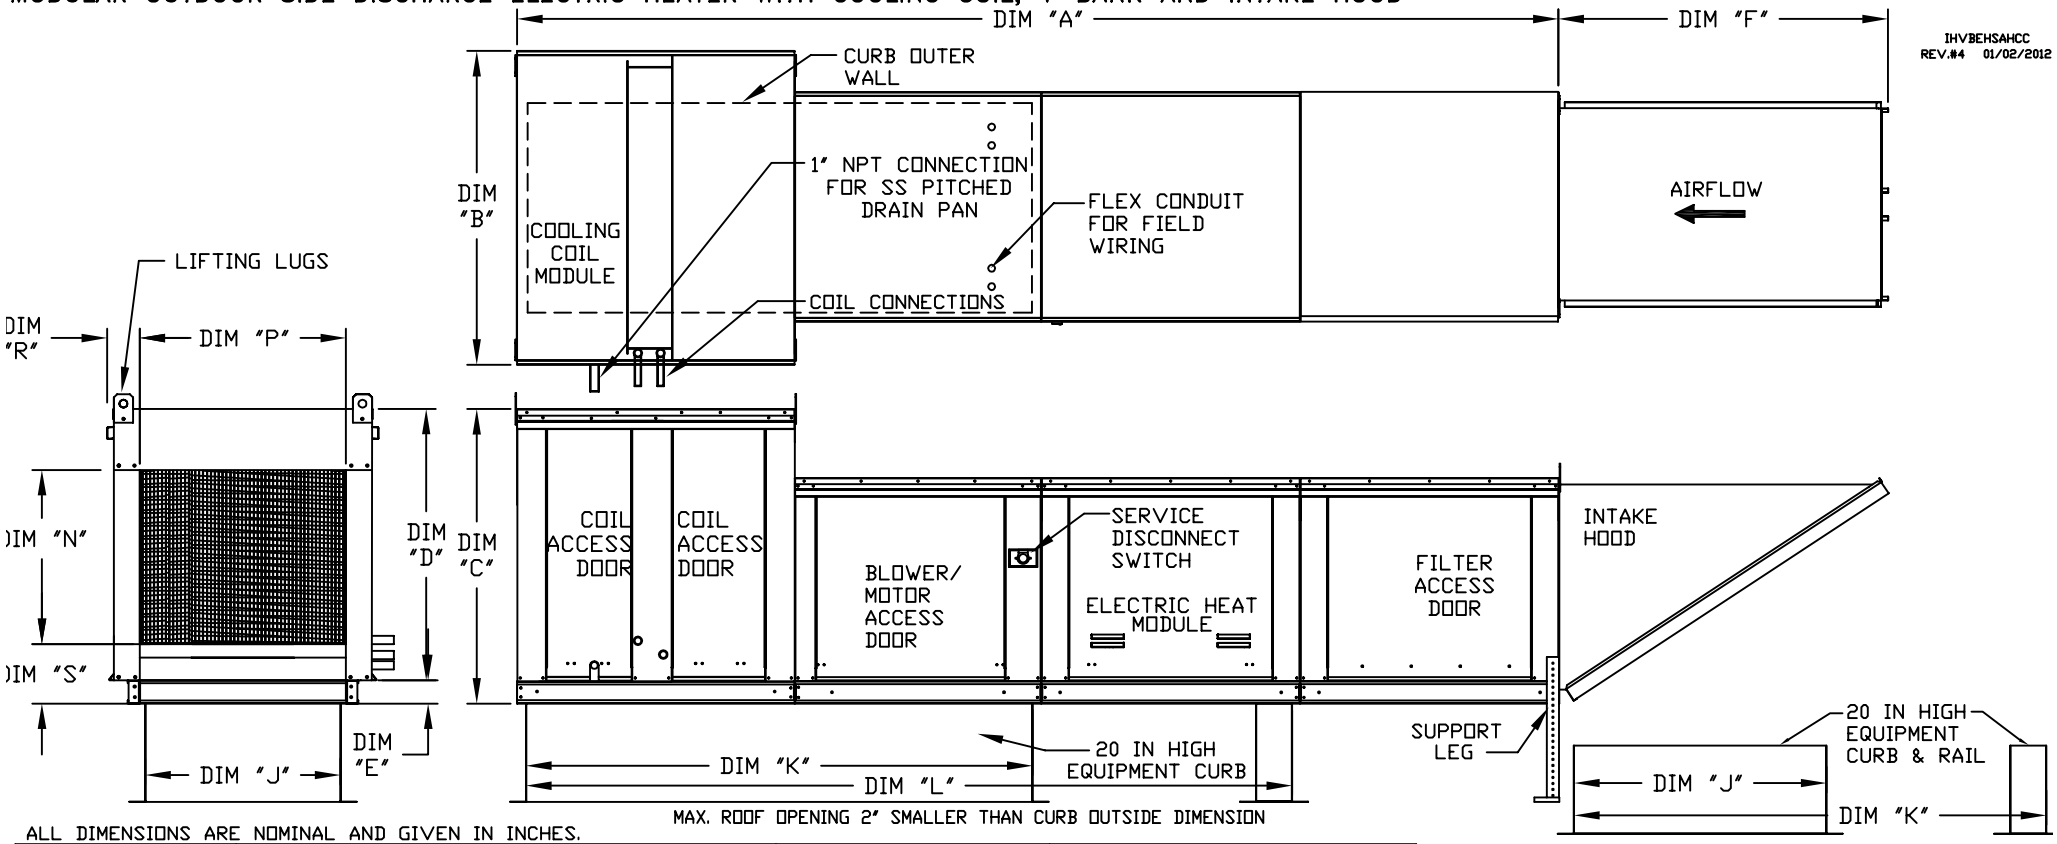

MAX. ROOF OPENING 2" SMALLER THAN CURB OUTSIDE DIMENSION

CURB/RAIL COMBINATION USED IN PLACE OF SINGLE CURB ON UNITS WITH 20" AND 25" BLOWERS

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

		UNIT DIMENSIONS						CURB/RAIL			DISCHARGE OPENING			
MODEL	WEIGHT	A	B	C	D	E	F	J	K	L	N	P	R	S
E1-G10	1000 LBS	148-7/8	39-3/8	42-3/4	39	3-3/4	44-3/8	21	71	113-1/4	17-1/2	16	11	5-3/4
E2-G15	1370 LBS	156-7/8	49-3/8	47-3/4	44	3-3/4	53-5/8	31	79	121-1/4	29-3/4	22-3/4	12-5/8	5-3/4
E3-G18	1645 LBS	167-7/8	54-3/8	56-3/8	51-1/8	5-1/4	51-5/8	35	84	126-1/4	29-5/8	30	11-1/2	7-3/8
E4-920	2670 LBS	208-3/16	60-7/16	64-3/8	59-1/8	5-1/4	76-3/8	42	115-3/16	169-1/2	36-3/4	34	12-1/2	7-3/8
E5-925	3370 LBS	218-3/16	79-7/16	68-7/16	63-3/16	5-1/4	71-3/8	52-3/4	125-3/16	179-1/2	45-1/4	43	17-1/2	7-3/8

UNIT INFORMATION.

	TONNAGE RANGE		FILTERS	
MODEL	MIN	MAX	FILTER SIZE & QTY	MAX. FILTER VELOCITY
E1-G10	3 Ton	12.5 Ton	20"x25"x2" (3)	@3600 CFM = 418 FPM
E2-G15	5 Ton	20 Ton	16"x20"x2" (8)	@6500 CFM = 464 FPM
E3-G18	10 Ton	25 Ton	20"x25"x2" (8)	@8000 CFM = 348 FPM
E4-920	20 Ton	40 Ton	16"x20"x2" (15)	@13000 CFM = 495 FPM
E5-925	30 Ton	50 Ton	20"x25"x2" (12)	@22000 CFM = 638 FPM