
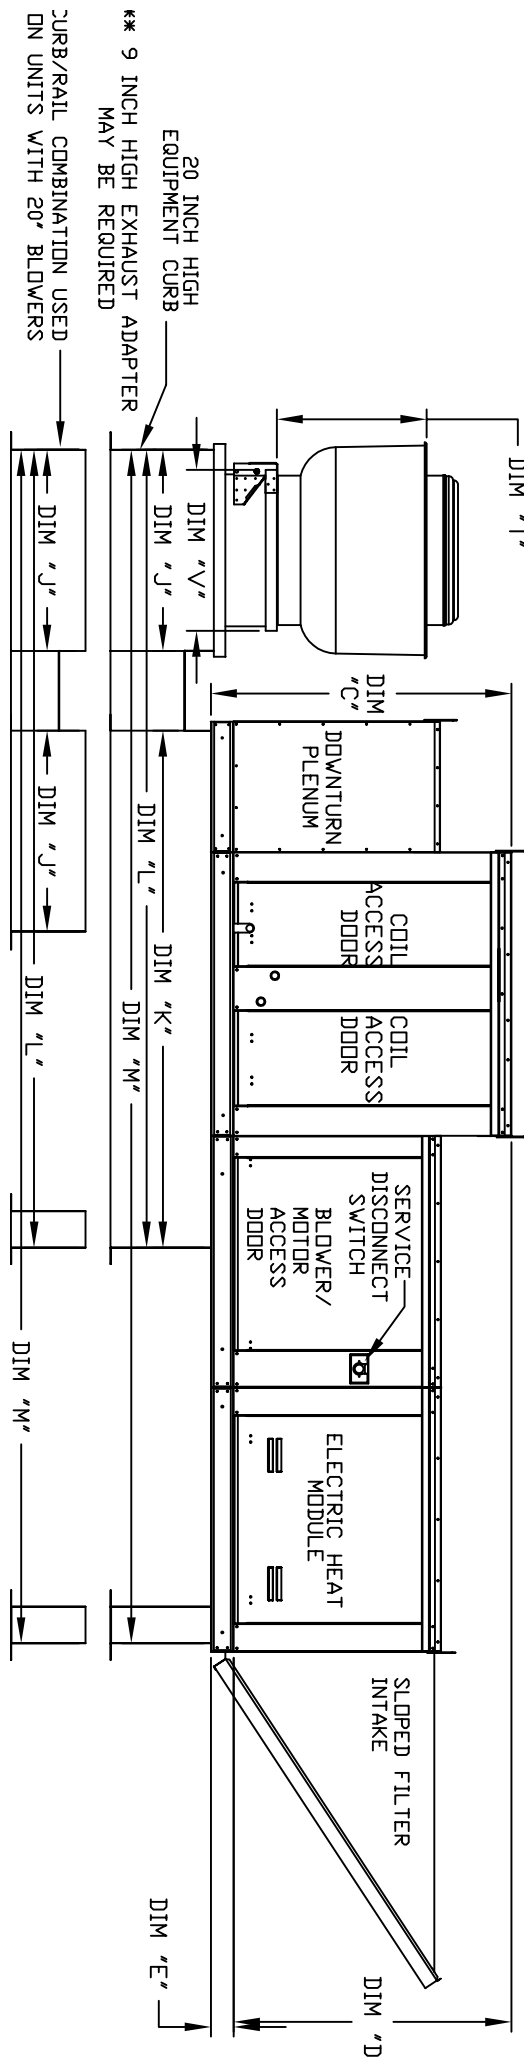


MODULAR OUTDOOR DOWN DISCHARGE ELECTRIC HEATER-ROOF TOP PACKAGE WITH COOLING COIL AND INTAKE HOOD

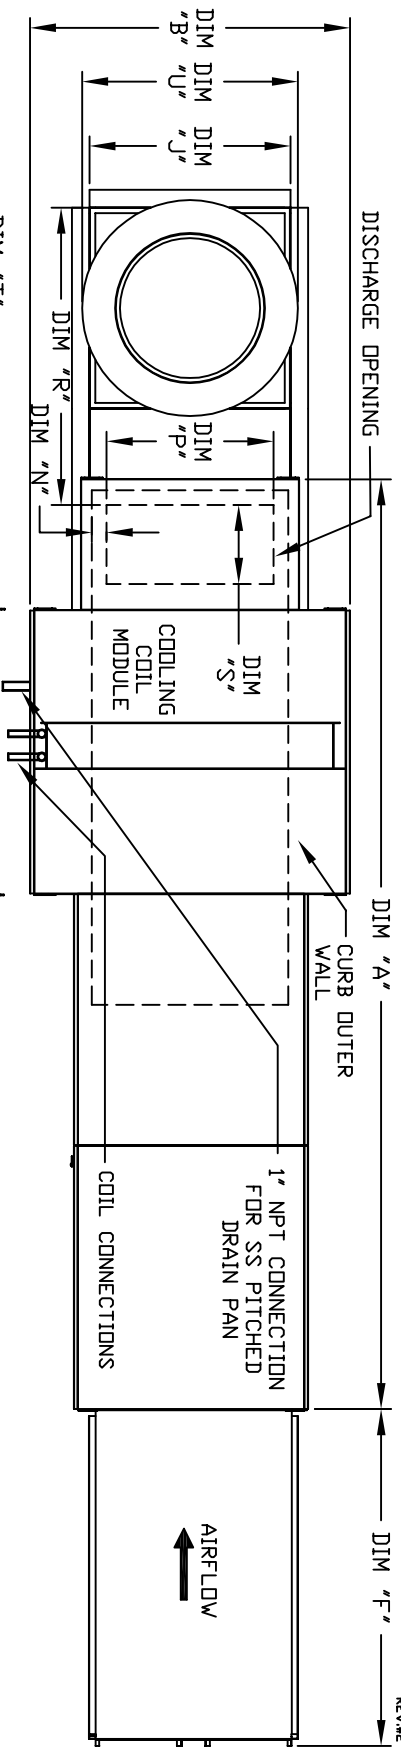

EXHAUST UNIT DIMENSIONS

MODEL #	T	U	V *
DU12	14-1/2	22	19
DU11	18-1/2	27-1/4	21
DU15	21-1/2	30-1/4	21
DU16	23	33-3/4	24-3/4
DU17	23-1/2	39-3/8	28
DU18	29-1/2	43-3/8	28
DU19	30-5/8	43-3/8	33
DU20	33-1/2	53-3/4	41

UNIT DIMENSIONS

MODEL	WEIGHT	A	B	C	D	E	F	J	K	L	M	N	P	R	S
E1-G10	985 LBS	135	39-3/8	42-3/4	39	3-3/4	44-3/8	21	71	106	166-5/8	3-9/16	13-7/8	36-13/16	11-1/2
E2-G15	1350 LBS	149	49-3/8	47-3/4	44	3-3/4	53-5/8	31	79	124	190-5/8	4-5/16	22-3/8	46-9/16	18
E3-G18	1620 LBS	154	54-3/8	56-3/8	51-1/8	5-1/4	51-5/8	35	84	133	199-5/8	6-5/16	22-3/8	49-1/2	18
E4-920	2625 LBS	203-3/16	60-7/16	64-3/8	59-1/8	5-1/4	76-3/8	42	115-3/16	171-3/16	235-7/8	5-1/4	31-1/2	56-13/16	23-1/2

UNIT INFORMATION

MODEL	TONNAGE RANGE		FILTER SIZE & QTY	MAX. FILTER VELOCITY
	MIN	MAX		
E1-G10	3 Ton	12.5 Ton	16"x20"x2" (3)	23600 CFM = 686 FPM
E2-G15	5 Ton	20 Ton	20"x25"x2" (3)	26500 CFM = 754 FPM
E3-G18	10 Ton	25 Ton	16"x20"x2" (6)	28000 CFM = 762 FPM
E4-920	20 Ton	40 Ton	16"x20"x2" (10)	31300 CFM = 743 FPM

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

20 INCH HIGH EQUIPMENT CURB

\*\* 9 INCH HIGH EXHAUST ADAPTER MAY BE REQUIRED

CURB/RAIL COMBINATION USED ON UNITS WITH 20" BLOWERS

DISCHARGE OPENING

DIM "A"

CURB OUTER WALL

COIL MODULE

DIM "S"

1" NPT CONNECTION FOR SS PITCHED DRAIN PAN

COIL CONNECTIONS

AIRFLOW

DISCHARGE OPENING

DIM "B"

DIM "U"

DIM "J"

DIM "R"

DIM "N"

DIM "T"

DIM "V"

DIM "J"

DIM "C"

DOWNTURN PLENUM

COIL ACCESS DOOR

COIL ACCESS DOOR

SERVICE DISCONNECT SWITCH

BLOWER/MOTOR ACCESS DOOR

ELECTRIC HEAT MODULE

SLOPED FILTER INTAKE

DIM "D"

DIM "E"

DIM "L"

DIM "M"

DIM "N"

DIM "P"

DIM "R"

DIM "S"

ROOF OPENING 2" SMALLER THAN CURB DIMENSION