
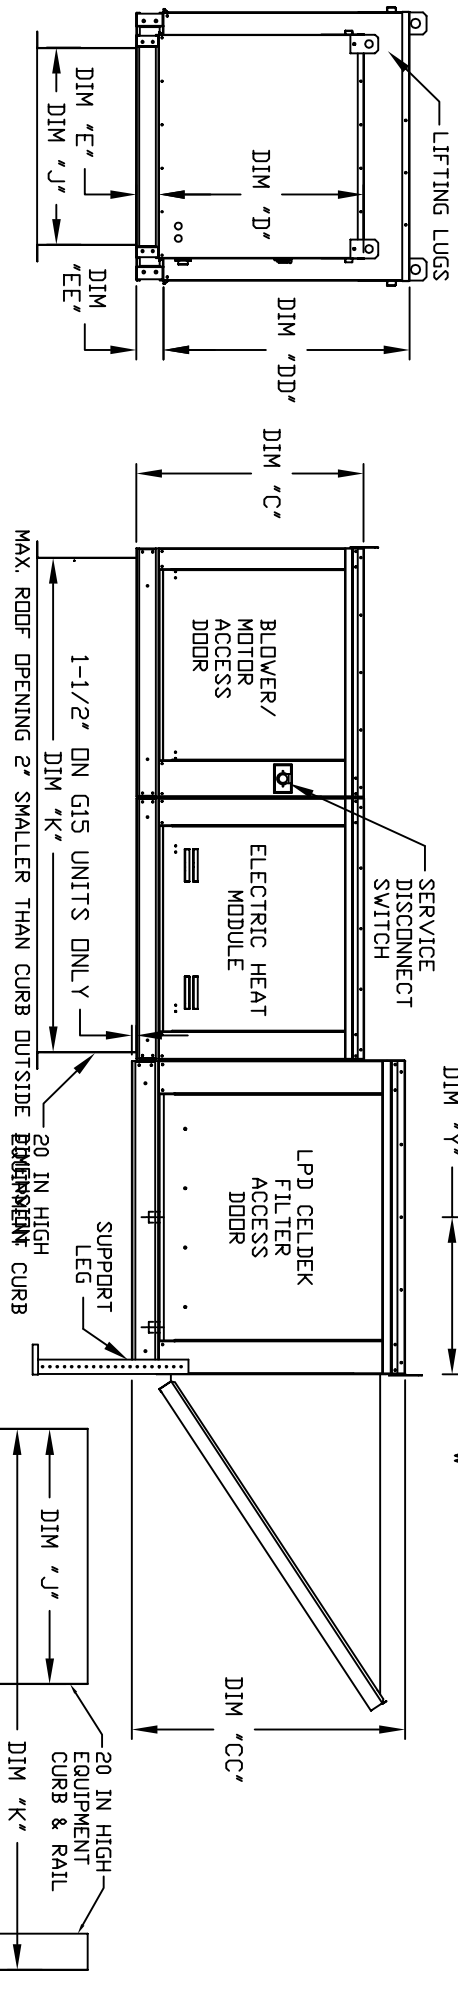


MODULAR OUTDOOR DOWN DISCHARGE ELECTRIC HEATER WITH LPD EVAPORATIVE COOLER AND INTAKE HOOD

REV A3 01/09/2012 THE PRC/SHAH

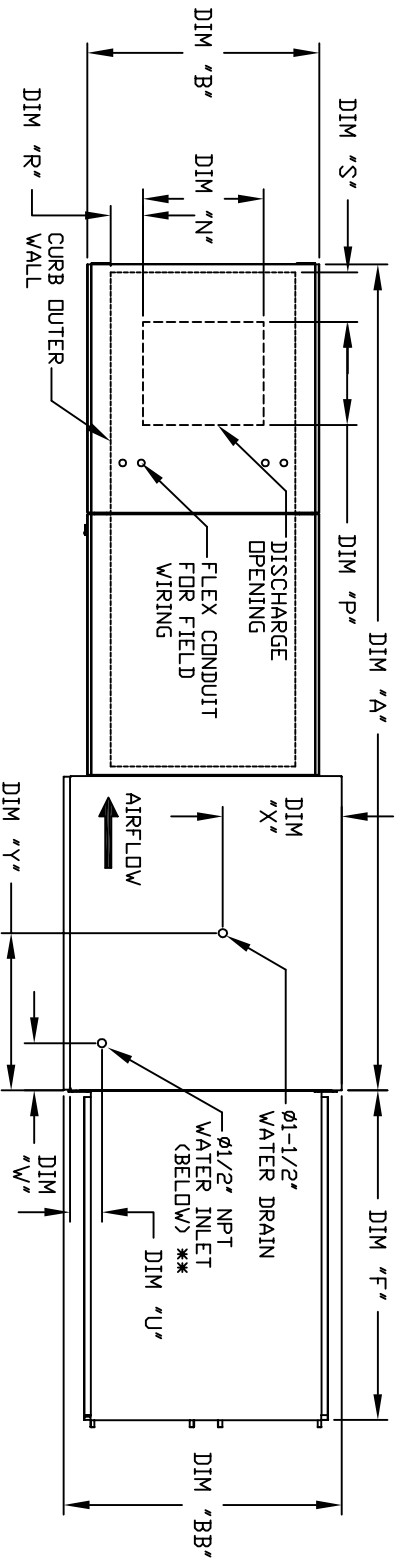

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	UNIT DIMENSIONS												DISCHARGE OPENING															
	A	B	BB	C	CC	D	DD	E	EE	F	J	K	N	P	R	S	1	2	3	4	5	6	7	8	9	10	11	12
E1-G10	106-3/8	27-3/8	36-3/4	29-3/4	36-3/4	26-1/16	33	3-3/4	3-3/4	53-5/8	21	71	13-1/4	11-1/2	3-7/8	5-9/16	1	2	3	4	5	6	7	8	9	10	11	12
E2-G15	120-3/8	37-3/8	40-3/4	36-3/4	43-3/8	33-1/16	38-1/8	3-3/4	3-3/4	51-5/8	31	79	18-3/4	16	6-1/8	8-5/16	1	2	3	4	5	6	7	8	9	10	11	12
E3-G18	122-1/2	41-3/8	47-7/8	43-3/8	51-3/8	38-1/16	46-1/8	5-1/4	5-1/4	76-3/8	35	84	22	6-1/2	10-5/16	1	2	3	4	5	6	7	8	9	10	11	12	
E4-920	153-5/8	48-7/16	58-5/8	51-3/8	58-3/8	46-1/8	53-1/8	5-1/4	5-1/4	71-3/8	42	115-3/16	24-7/8	24-7/8	8-9/16	10-5/8	1	2	3	4	5	6	7	8	9	10	11	12

UNIT INFORMATION

MODEL	FILTER SIZE & QTY		MAX. FILTER VELOCITY	CELDEK EVAPORATIVE COOLING UNIT																				
	1	2		TOT. WEIGHT	MEDIA SIZE & QTY	VEL. @ MAX. CFM	NOZZLES	MAX. FLOW RATE	WATER INLET	WATER INLET	DRAIN OPENING	WATER INLET	DRAIN OPENING											
G10	20"x25"x2"	(3)	@3600 CFM = 417 FPM	825 LBS	25"x32"x12"	648 FPM	20	6.5 GPH	4-1/2	6-1/4	18	16	1	2	3	4	5	6	7	8	9	10	11	12
G15	16"x20"x2"	(6)	@6500 CFM = 619 FPM	1060 LBS	30"x36"x12"	867 FPM	28	8.4 GPH	4-1/2	5-3/4	20	19	1	2	3	4	5	6	7	8	9	10	11	12
G18	16"x20"x2"	(10)	@8000 CFM = 457 FPM	1395 LBS	38"x43"x12"	705 FPM	35	10.15 GPH	4-1/2	5-3/4	23-1/2	17-1/2	1	2	3	4	5	6	7	8	9	10	11	12
920	20"x25"x2"	(8)	@13000 CFM = 565 FPM	2035 LBS	45"x54"x12"	770 FPM	42	12.6 GPH	4-1/2	5-3/4	28-7/8	17-1/2	1	2	3	4	5	6	7	8	9	10	11	12