


# MODULAR OUTDOOR SIDE DISCHARGE ELECTRIC HEATER WITH COOLING COIL AND INTAKE HOOD

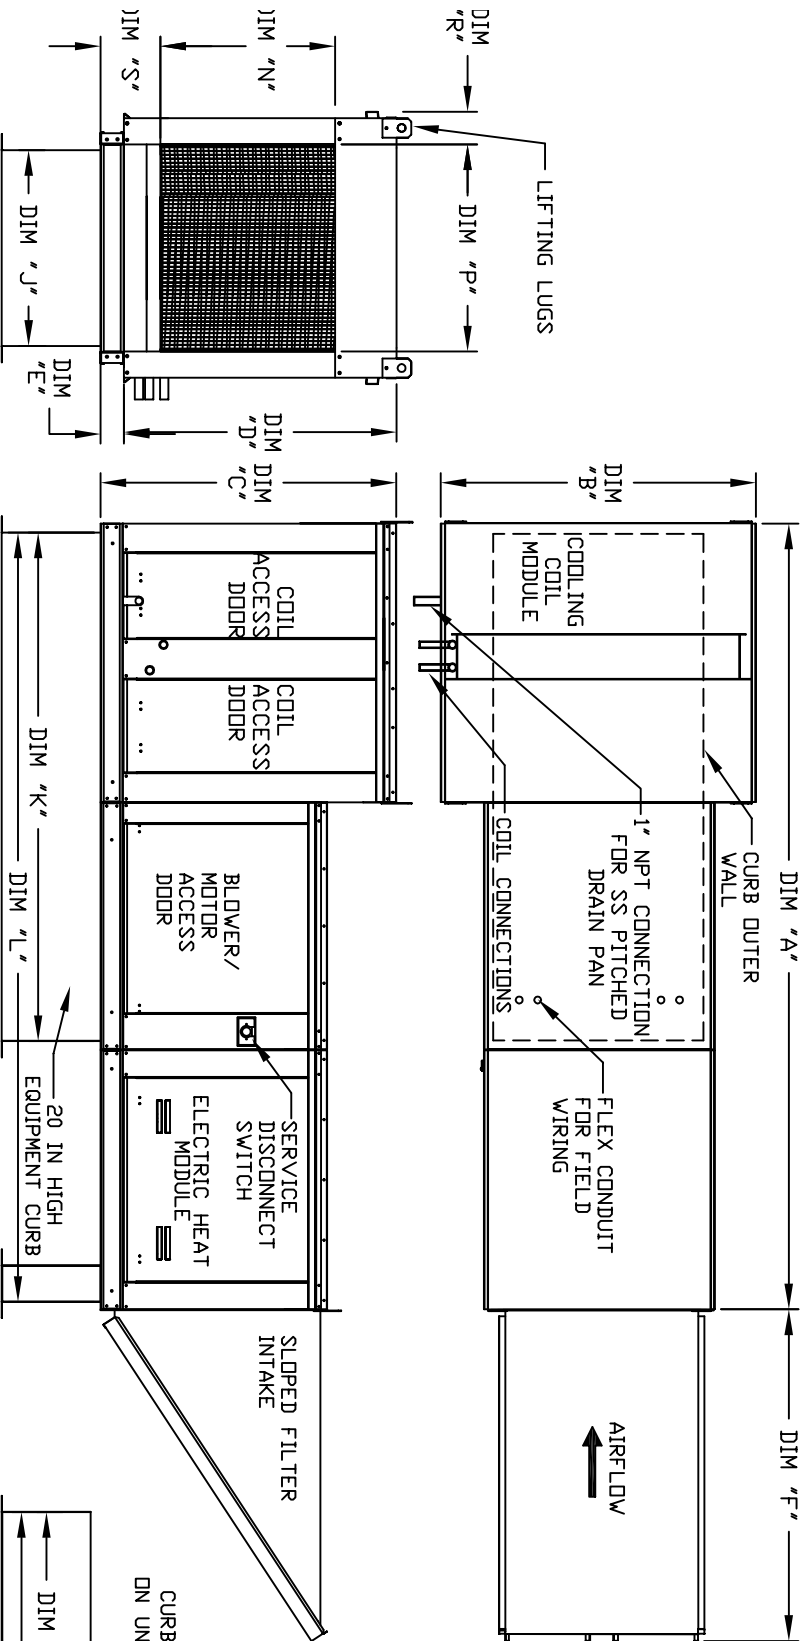

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MAX. ROOF OPENING 2" SMALLER THAN CURB OUTSIDE DIMENSION

MODEL	WEIGHT	UNIT DIMENSIONS										CURB/RAIL		DISCHARGE OPENING		
		A	B	C	D	E	F	J	K	L	N	P	R	S		
E1-G10	905 LBS	116-5/8	39-3/8	42-3/4	39	3-3/4	44-3/8	21	71	113-1/4	17-1/2	16	11	5-3/4		
E2-G15	1235 LBS	124-5/8	49-3/8	47-3/4	44	3-3/4	53-5/8	31	79	121-1/4	29-3/4	22-3/4	12-5/8	5-3/4		
E3-G18	1480 LBS	129-5/8	54-3/8	56-3/8	51-1/8	5-1/4	51-5/8	35	84	126-1/4	29-5/8	30	11-1/2	7-3/8		
E4-920	2435 LBS	172-13/16	60-7/16	64-3/8	59-1/8	5-1/4	76-3/8	42	115-3/16	169-1/2	36-3/4	34	12-1/2	7-3/8		
E5-925	3075 LBS	182-13/16	79-7/16	68-7/16	63-3/16	5-1/4	71-3/8	52-3/4	125-3/16	179-1/2	45-1/4	43	17-1/2	7-3/8		

## UNIT INFORMATION

MODEL	TONNAGE RANGE		FILTER SIZE & QTY	MAX. FILTER VELOCITY
	MIN	MAX		
E1-G10	3 Ton	12.5 Ton	16"x20"x2" (3)	@3600 CFM = 686 FPM
E2-G15	5 Ton	20 Ton	20"x25"x2" (3)	@5500 CFM = 754 FPM
E3-G18	10 Ton	25 Ton	16"x20"x2" (6)	@8000 CFM = 762 FPM
E4-920	20 Ton	40 Ton	16"x20"x2" (10)	@13000 CFM = 743 FPM
E5-925	30 Ton	50 Ton	20"x25"x2" (8)	@22000 CFM = 954 FPM

