


MODULAR OUTDOOR DOWN DISCHARGE ELECTRIC HEATER WITH COOLING COIL AND INTAKE HOOD

THENSAHCCBP
REV#2 6/1/2009

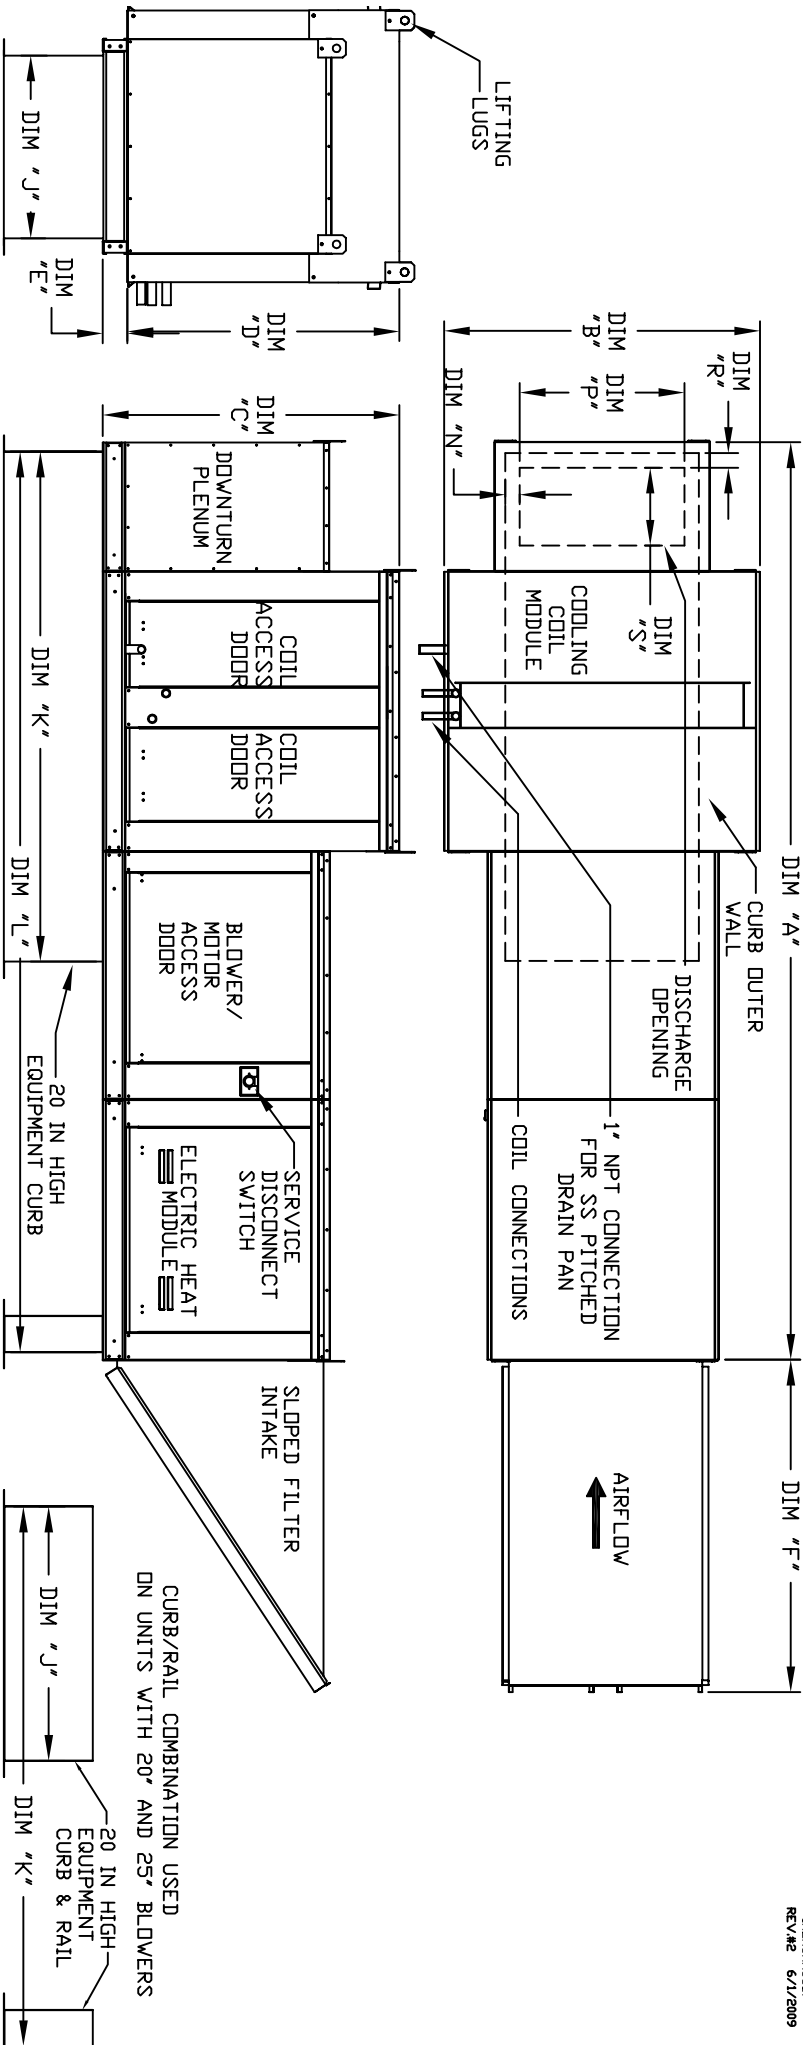

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	WEIGHT		UNIT DIMENSIONS												
	A	B	C	D	E	F	J	K	L	N	P	R	S		
E1-G10	985 LBS	135	39-3/8	42-3/4	39	3-3/4	44-3/8	21	71	131-5/8	3-9/16	13-7/8	1-13/16	11-1/2	
E2-G15	1350 LBS	149	49-3/8	47-3/4	44	3-3/4	53-5/8	31	79	145-5/8	4-5/16	22-3/8	1-9/16	18	
E3-G18	1620 LBS	154	54-3/8	56-3/8	51-1/8	5-1/4	51-5/8	35	84	150-5/8	6-5/16	22-3/8	1-1/2	18	
E4-920	2625 LBS	203	3/16	60-7/16	64-3/8	59-1/8	5-1/4	76-3/8	42	115-3/16	199-7/8	5-1/4	31-1/2	23-1/2	
E5-925	3305 LBS	213	3/16	79-7/16	68-7/16	63-3/16	5-1/4	71-3/8	52-3/4	125-3/16	209-7/8	5-7/8	31-1/2	23-1/2	

MODEL	TONNAGE RANGE		FILTER SIZE & QTY	MAX. FILTER VELOCITY
	MIN	MAX		
E1-G10	3 Ton	12.5 Ton	16"x20"x2" (3)	@3600 CFM = 686 FPM
E2-G15	5 Ton	20 Ton	20"x25"x2" (3)	@6500 CFM = 754 FPM
E3-G18	10 Ton	25 Ton	16"x20"x2" (6)	@8000 CFM = 762 FPM
E4-920	20 Ton	40 Ton	16"x20"x2" (10)	@13000 CFM = 743 FPM
E5-925	30 Ton	50 Ton	20"x25"x2" (8)	@20000 CFM = 956 FPM

UNIT INFORMATION