MODULAR OUTDOOR DOWN DISCHARGE ELECTRIC HEATER–ROOF TOP PACKAGE WITH COOLING, V–BANK AND INTAKE HOOD

IHVBEHSAHCCDPRTP-MP
REV.#7 06/15/2015

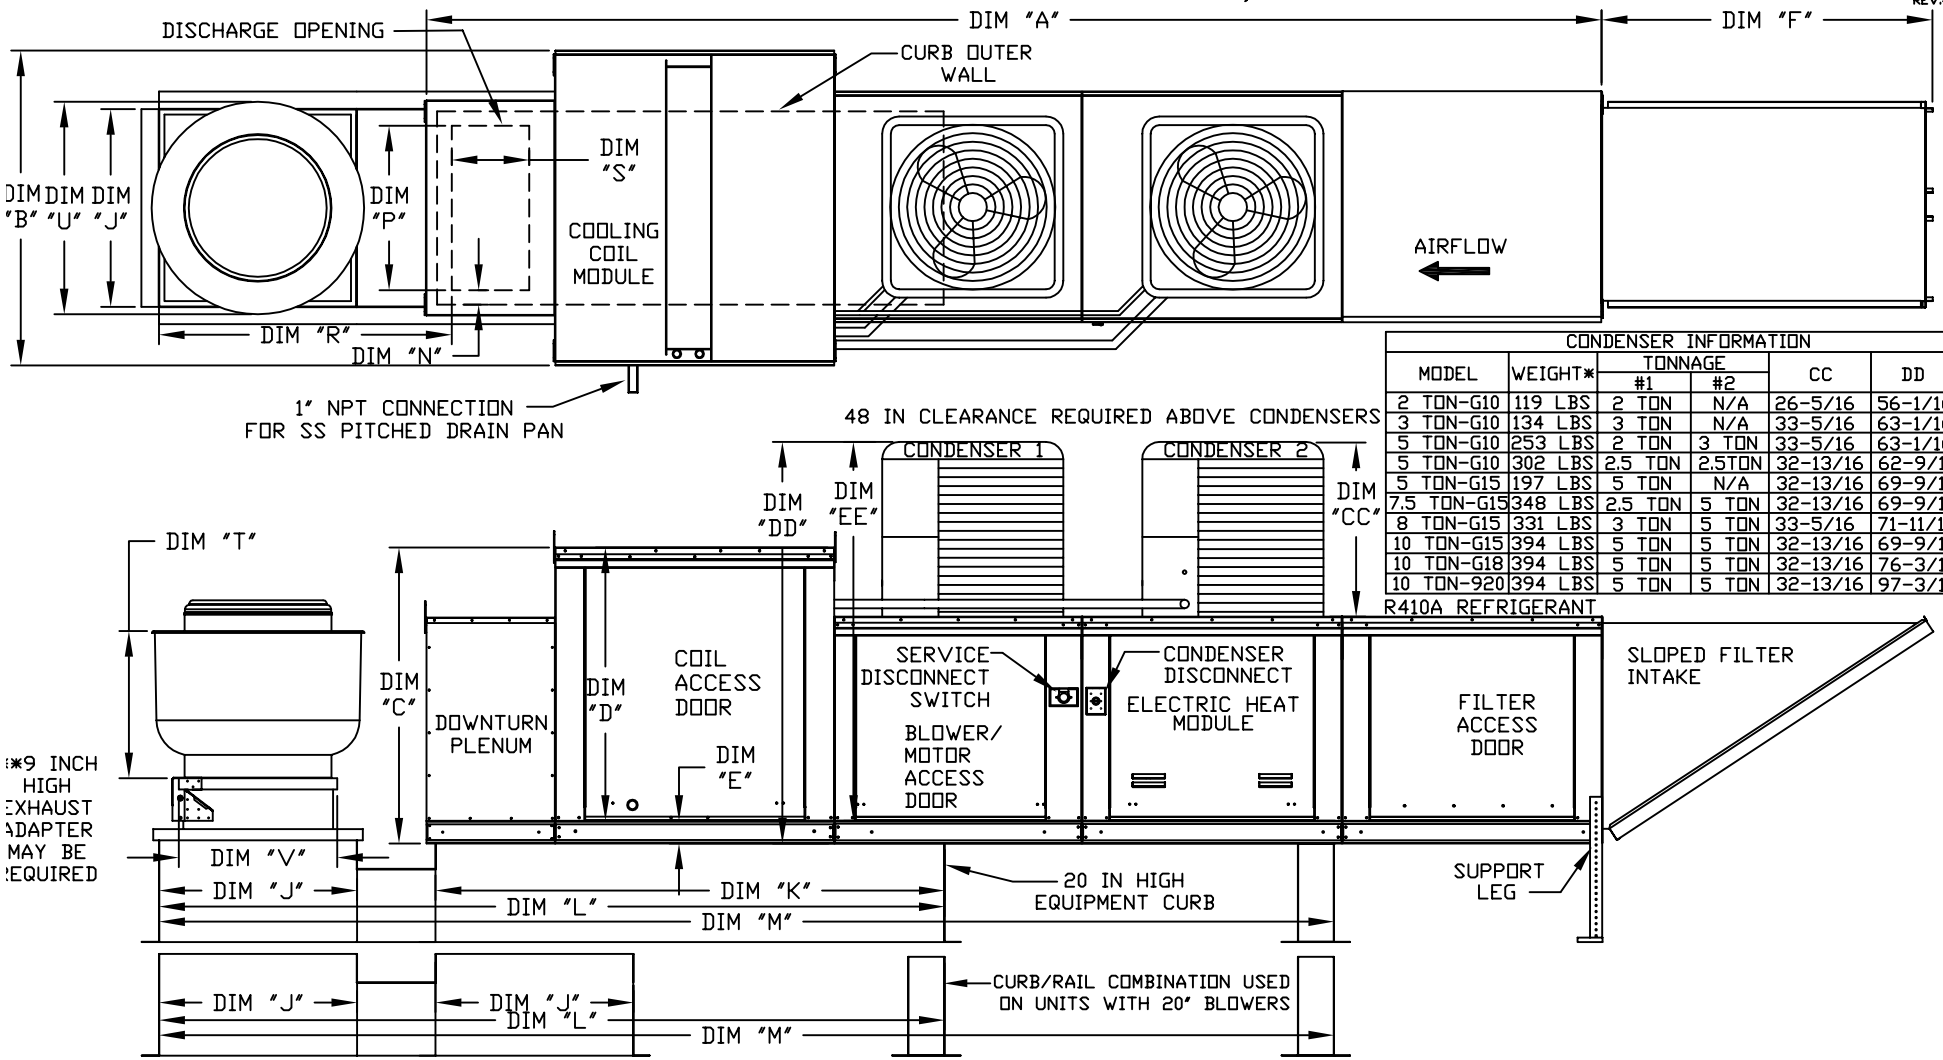

CONDENSER INFORMATION						
MODEL	WEIGHT*	TONNAGE #1	TONNAGE #2	CC	DD	EE
2 TON-G10	119 LBS	2 TON	N/A	26-5/16	56-1/16	52-3/8
3 TON-G10	134 LBS	3 TON	N/A	33-5/16	63-1/16	59-3/8
5 TON-G10	253 LBS	2 TON	3 TON	33-5/16	63-1/16	59-3/8
5 TON-G10	302 LBS	2.5 TON	2.5TON	32-13/16	62-9/16	58-7/8
5 TON-G15	197 LBS	5 TON	N/A	32-13/16	69-9/16	65-7/8
7.5 TON-G15	348 LBS	2.5 TON	5 TON	32-13/16	69-9/16	65-7/8
8 TON-G15	331 LBS	3 TON	5 TON	33-5/16	71-11/16	68
10 TON-G15	394 LBS	5 TON	5 TON	32-13/16	69-9/16	65-7/8
10 TON-G18	394 LBS	5 TON	5 TON	32-13/16	76-3/16	70-7/8
10 TON-920	394 LBS	5 TON	5 TON	32-13/16	97-3/16	91-15/16

R410A REFRIGERANT

EXHAUST UNIT DIMENSIONS			
MODEL #	T	U	V *
DU12	14-1/2	22	19
BDU11	18-1/2	27-1/4	21
DU25			
DU30			
DU33			
BDU13	21-1/2	30-1/4	21
DU50			
BDU15	23	33-3/4	24-3/4
DU75			
DU85			
BDU18	23-1/2	39-3/8	28
BDU20	29-1/2	38-7/8	28
BDU24	30-5/8	43-3/8	33
BDU30	33-1/2	52-3/4	40

		UNIT DIMENSIONS						CURB/RAIL				DISCHARGE OPENING			
MODEL	WEIGHT	A	B	C	D	E	F	J	K	L	M	N	P	R	S
E1-G10	1080 LBS	167-1/4	39-3/8	42-3/4	39	3-3/4	44-3/8	21	71	106	166-5/8	3-9/16	13-7/8	36-13/16	11-1/2
E2-G15	1485 LBS	181-1/4	49-3/8	47-3/4	44	3-3/4	53-3/8	31	79	124	190-5/8	4-5/16	22-3/8	46-9/16	18
E3-G18	1785 LBS	192-1/4	54-3/8	56-3/8	51-1/8	5-1/4	51-5/8	35	84	133	199-5/8	6-5/16	22-3/8	49-1/2	18
E4-920	2860 LBS	238-9/16	60-7/16	64-3/8	59-1/8	5-1/4	76-3/8	42	115-3/16	171-3/16	255-7/8	5-1/4	31-1/2	56-13/16	23-1/2

UNIT INFORMATION.

	TONNAGE RANGE		FILTERS	
MODEL	MIN	MAX	FILTER SIZE & QTY	MAX. FILTER VELOCITY
E1-G10	2 Ton	5 Ton	20"x25"x2" (3)	@3600 CFM = 418 FPM
E2-G15	5 Ton	10 Ton	16"x20"x2" (8)	@6500 CFM = 464 FPM
E3-G18	10 Ton	10 Ton	20"x25"x2" (8)	@8000 CFM = 348 FPM
E4-920	10 Ton	10 Ton	16"x20"x2" (15)	@13000 CFM = 495 FPM

*ADD CONDENSING UNIT WEIGHT TO WEIGHT IN TABLE ABOVE

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MAX. ROOF OPENING 2" SMALLER THAN CURB OUTSIDE DIMENSION