


MODULAR OUTDOOR DOWN DISCHARGE ELECTRIC HEATER-ROOF TOP PACKAGE WITH COOLING COIL, V-BANK AND SCREEN INTAKE

STVESHACDPRP7
REV#2 6/1/2009

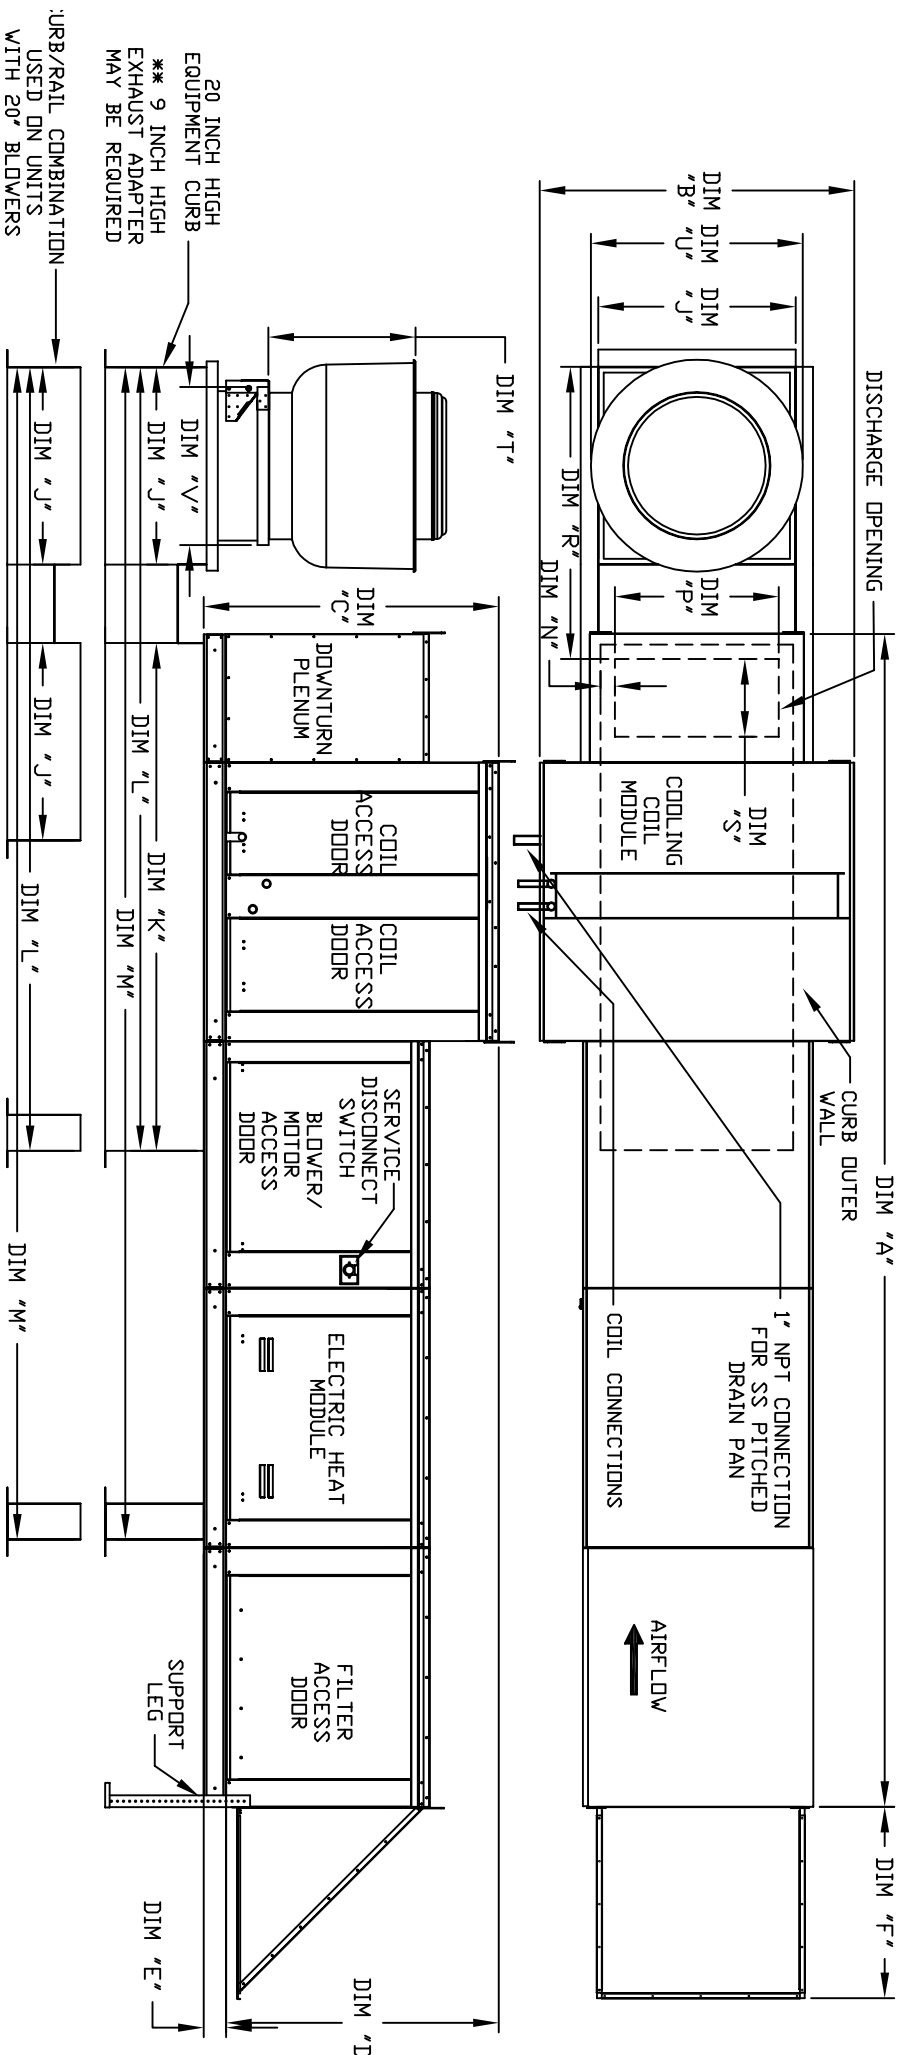

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL #	T	U	V *
BDU12	14-1/2	22	19
BDU11			
BDU5	18-1/2	27-1/4	21
BDU3			
BDU3	21-1/2	30-1/4	21
BDU0			
BDU5	23	33-3/4	24-3/4
BDU5			
BDU8	23-1/2	39-3/8	28
BDU20	29-1/2	38-7/8	28
BDU24	30-5/8	43-3/8	33
BDU20	33-1/2	53-3/4	40

MODEL	WEIGHT	UNIT DIMENSIONS										CURB/RAIL		DISCHARGE OPENING				
		A	B	C	D	E	F	J	K	L	M	N	P	R	S			
E1-G10	1060 LBS	167-1/4	39-3/8	42-3/4	39	3-3/4	22-3/8	21	71	106	166-5/8	3-9/16	13-7/8	36-13/16	11-1/2			
E2-G15	1495 LBS	181-1/4	49-3/8	47-3/4	44	3-3/4	30-5/16	31	79	124	190-5/8	4-5/16	22-3/8	46-9/16	18			
E3-G18	1745 LBS	192-1/4	54-3/8	56-3/8	51-1/8	5-1/4	34-3/16	35	84	133	199-5/8	6-5/16	22-3/8	49-1/2	18			
E4-920	2750 LBS	238-9/16	60-7/16	64-3/8	59-1/8	5-1/4	47-1/4	42	115-3/16	171-3/16	255-7/8	5-1/4	31-1/2	56-13/16	23-1/2			

MODEL	TONNAGE RANGE	MIN	MAX	FILTER SIZE & QTY	MAX. FILTER VELOCITY
E1-G10	3 Ton	12.5 Ton	20	20"x25"x2" (3)	83500 CFM = 418 FPM
E2-G15	5 Ton	20 Ton	25	20"x25"x2" (8)	86500 CFM = 464 FPM
E3-G18	10 Ton	25 Ton	40	20"x25"x2" (8)	88000 CFM = 348 FPM
E4-920	20 Ton	40 Ton	16	16"x20"x2" (15)	813000 CFM = 495 FPM

ROOF OPENING 2" SMALLER THAN CURB DIMENSION

20 INCH HIGH EQUIPMENT CURB
** 9 INCH HIGH EXHAUST ADAPTER MAY BE REQUIRED

URB/RAIL COMBINATION USED ON UNITS WITH 20" BLOWERS