


MODULAR OUTDOOR DOWN DISCHARGE ELECTRIC HEATER WITH V-BANK AND SCREEN INTAKE


SYBERBOM
REV#2 7/1/2009

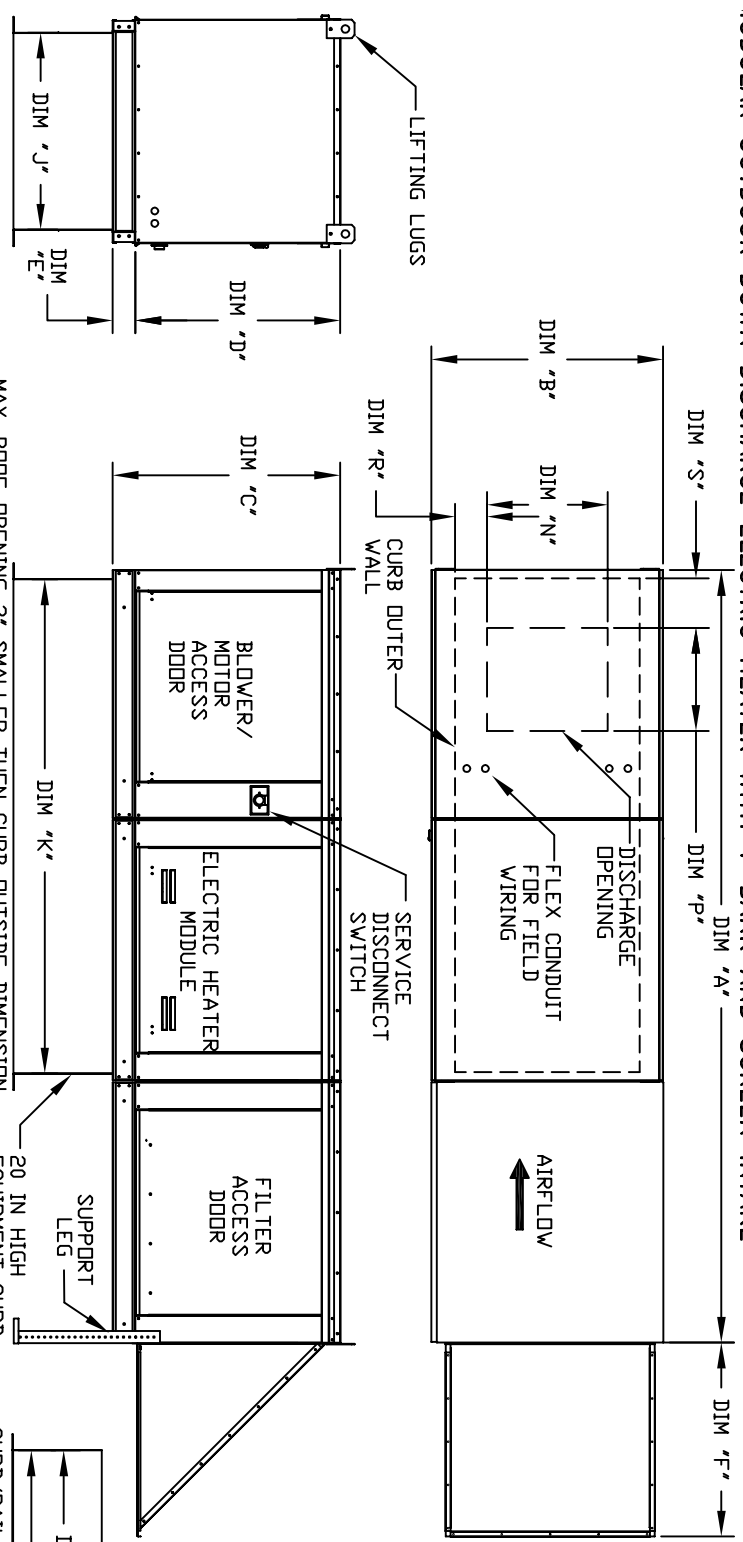

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MAX. ROOF OPENING 2" SMALLER THEN CURB OUTSIDE DIMENSION.

20 IN HIGH EQUIPMENT CURB

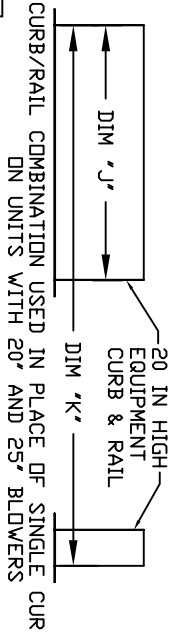

MODEL	WEIGHT	UNIT DIMENSIONS										CURB			DISCHARGE OPENING		
		A	B	C	D	E	F	J	K	N	P	R	S				
E1-G10	625 LBS	106-5/8	27-3/8	29-3/4	26-1/16	3-3/4	22-3/8	21	71	13-1/4	11-1/2	3-7/8	5-9/16				
E2-G15	910 LBS	114-5/8	37-3/8	36-3/4	33-1/16	3-3/4	30-5/16	31	79	18-3/4	16	6-1/8	8-5/16				
E3-G18	1100 LBS	125-5/8	41-3/8	43-3/8	38-1/16	5-1/4	34-3/16	35	84	22	19	6-1/2	10-5/16				
E4-920	1780 LBS	153-7/8	48-7/16	51-3/8	46-1/8	5-1/4	47-1/4	42	115-3/16	24-7/8	24-7/8	8-9/16	10-5/8				
E5-925	2375 LBS	163-7/8	59-3/16	58-3/8	53-1/8	5-1/4	49-5/8	52-3/4	125-3/16	31-3/8	31-3/8	10-11/16	12-7/8				

UNIT INFORMATION

MODEL	FILTER SIZE & QTY	FILTERS	
		MAX. FILTER VELOCITY	
E1-G10	20"x25"x2" (3)	@3600 CFM = 418 FPM	
E2-G15	16"x20"x2" (8)	@6500 CFM = 464 FPM	
E3-G18	20"x25"x2" (8)	@8000 CFM = 348 FPM	
E4-920	16"x20"x2" (15)	@13000 CFM = 495 FPM	
E5-925	20"x25"x2" (12)	@22000 CFM = 638 FPM	