


OUTDOOR DOWN DISCHARGE MOD PACKAGE UNIT-ROOFTOP PACKAGE, HEATING COIL, V-BANK, EVAPORATIVE COOLER INTAKE, INTAKE HOOD AND OPTIONAL MIXING BOX

INT-VAC09HC00AMRT-04P-15  
REV. 1/85 06/13/2015

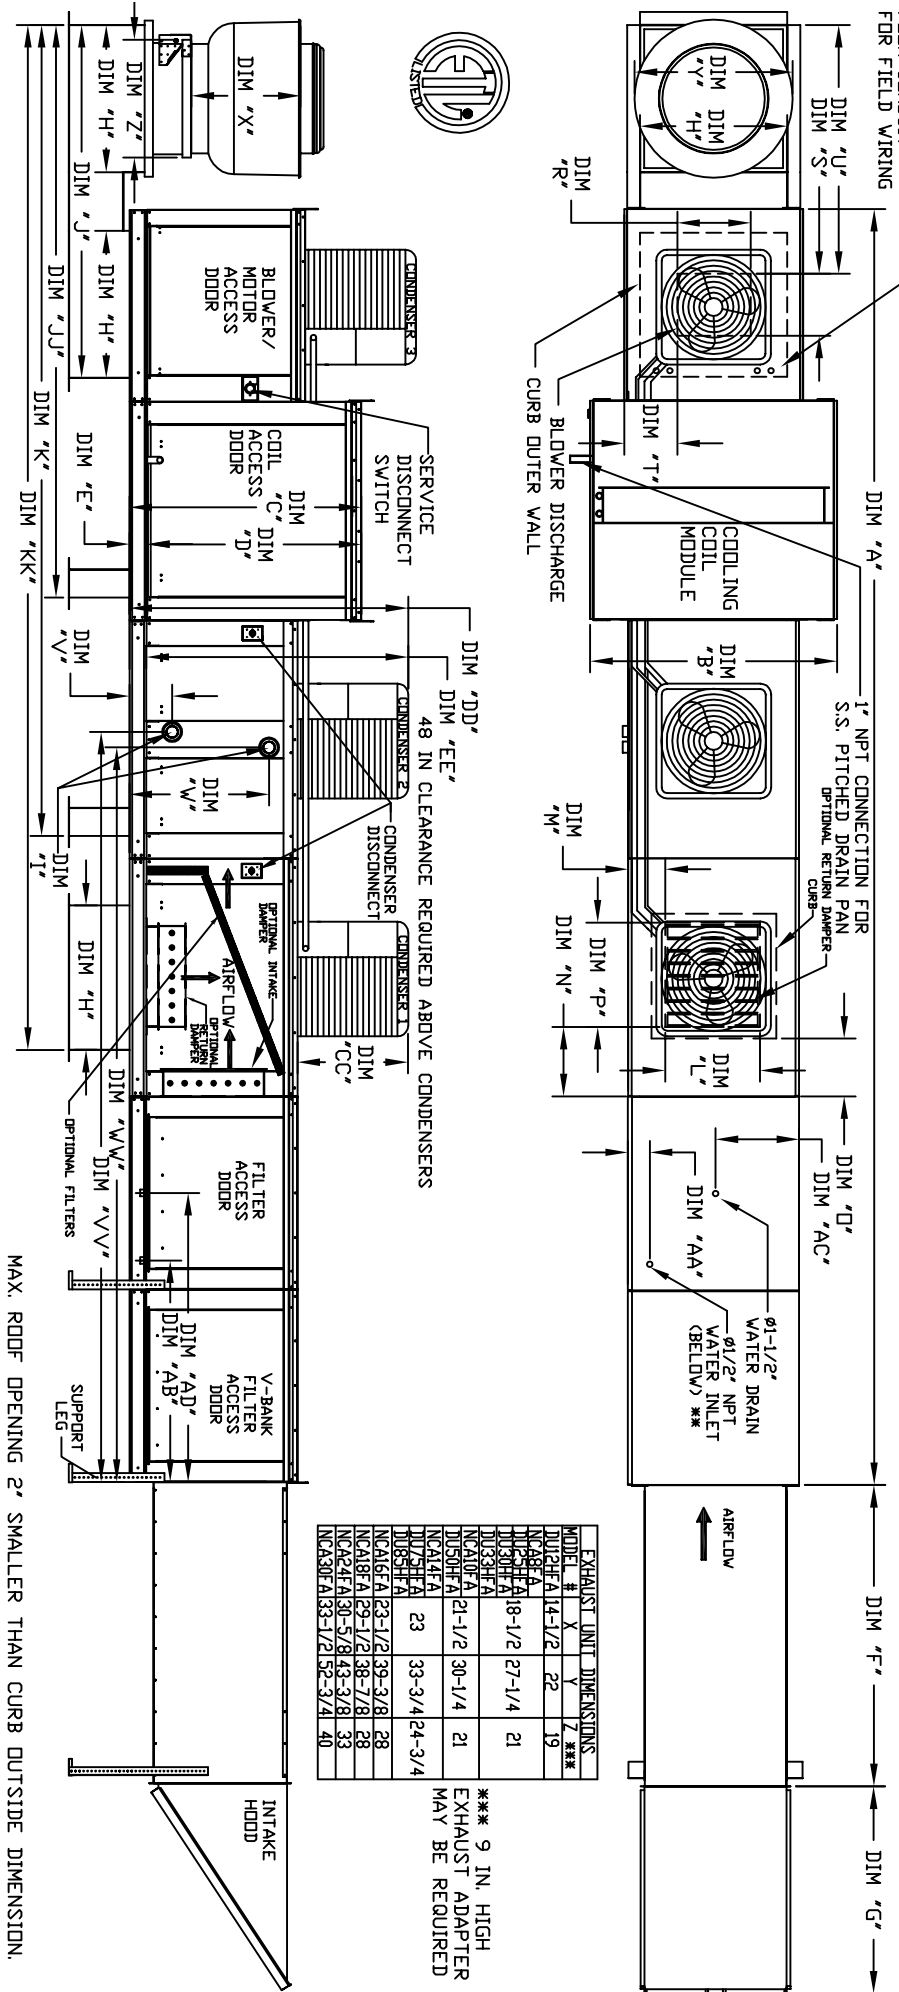

EXHAUST UNIT MODEL #	X	Y	Z ***
DU25FA	14-1/2	22	19
DU32FA	18-1/2	27-1/4	21
DU35FA	21-1/2	30-1/4	21
DU38FA	23	33-3/4	24-3/4
DU42FA	23-1/2	39-3/8	28
NCA16FA	29-1/2	38-7/8	28
NCA21FA	30-5/8	43-3/8	33
NCA30FA	33-1/2	52-3/4	40

\*\*\* 9 IN. HIGH EXHAUST ADAPTER MAY BE REQUIRED

MAX. ROOF OPENING 2" SMALLER THAN CURB OUTSIDE DIMENSION.

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

MODEL	UNIT DIMENSIONS													RETURN OPENING							DISCHARGE OPENING							TONNAGE RANGE			WATER INLET DRAIN OPENING			
	A	B	C	D	E	F	G	H	J	J1	J2	J3	K	KK	L	M	N	O	P	R	S	T	U	MIN	MAX	AA	AB	AC	AD					
G18	248-3/8	54-3/8	56-3/8	51-1/8	5-1/4	75	51-5/8	35	84	128-3/16	170-8/16	211-3/8	28	8	7	4-1/2	30	22	19	6-1/2	56	15	15	15	15	15	4-1/2	44	20	57-1/4				
920	297-7/8	60-7/8	64-3/8	59-1/8	5-1/4	50	76-3/8	42	98	160-5/16	214-1/2	264	33	10	11	8	36	24-7/8	24-7/8	19	8-9/16	57-1/8	15	15	15	4-1/2	41-1/8	23-1/2	152-7/8					

HOT WATER COIL MODULE				STEAM COIL MODULE			
MODEL	TOTAL CAPACITY	PIPE CONNECTION	STEAM	MODEL	TOTAL CAPACITY	PIPE CONNECTION	STEAM
G18	514.97	1-1/2"	V	G18	505.64	1-1/2"	V
920	831.87	2-1/2"	V	920	812.24	2-1/2"	V

HOT WATER COIL MODULE	MODEL	TOTAL WEIGHT	STEAM			GELDEK EVAPORATIVE COIL			MAX. FLOW RATE		
			WT.	SIZE	QTY	WT.	SIZE	QTY			
G18	514.97	157.8	20"x25"x2"	(8)	1067	1067	FPM	34	157.8	20"x25"x2"	(8)
920	831.87	285	30"x36"x1 1/2"	(15)	1322	1322	FPM	35	285	30"x36"x1 1/2"	(15)

CONDENSER INFORMATION						EXHAUST UNIT DIMENSIONS					
MODEL	WEIGHT	#1	#2	#3	CC	DD	EE	Model #	X	Y	Z ***
15 TON-G18	591 LBS	5	5	5	32-13/16	76-3/16	70-7/8	DU25FA	14-1/2	22	19
15 TON-920	591 LBS	5	5	5	32-13/16	97-3/16	91-15/16	DU32FA	18-1/2	27-1/4	21

\*\* MAX WEIGHT FROM CONDENSER TABLE TO WEIGHTS IN TABLES ABOVE

\*\* MAX EVAP VAPOR PRESSURE = 50 PSI @ 70 DEG F

OPTIONAL MIXING BOX FILTERS

DATE