OUTDOOR SIDE DISCHARGE MOD PACKAGE UNIT, V-BANK, LPD EVAPORATIVE COOLER INTAKE, INTAKE HOOD AND OPTIONAL MIXING BOX

IHVBLPDECMBCCSAH-MPU-15
REV.#2 06/15/2015

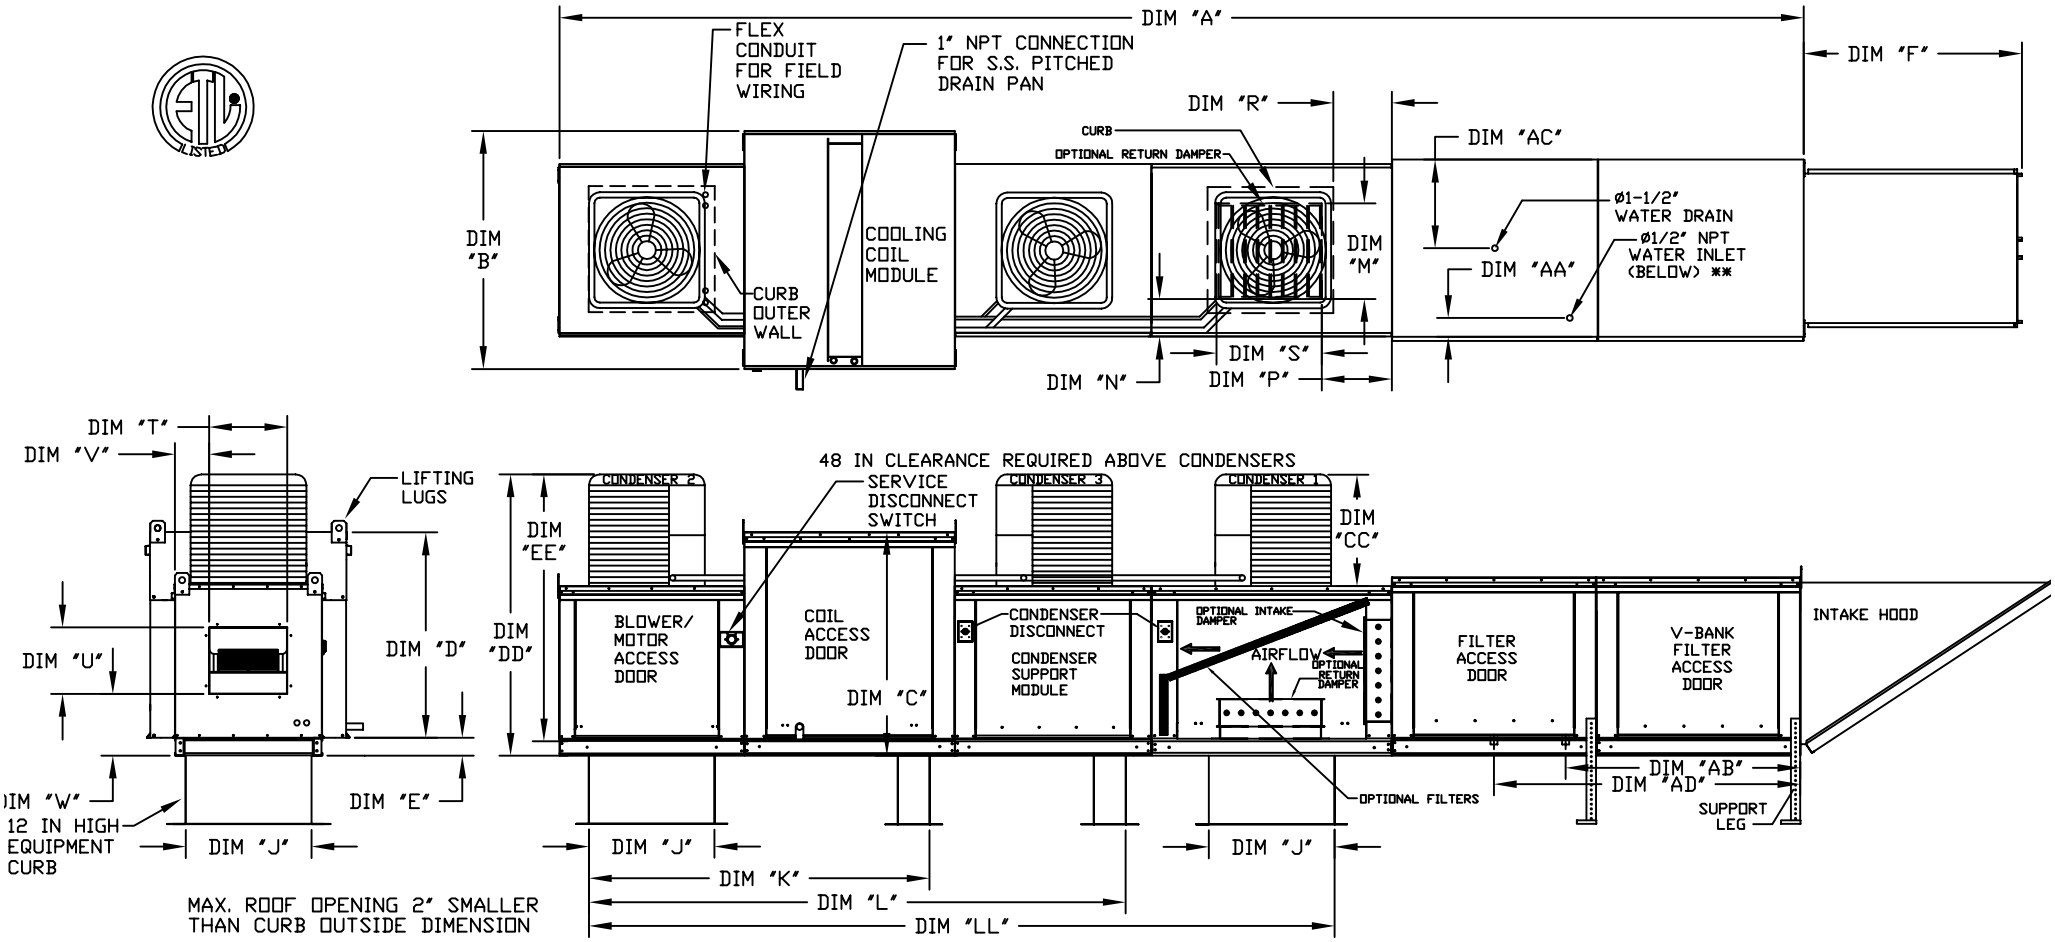

ALL DIMENSIONS ARE NOMINAL AND GIVEN IN INCHES.

UNIT DIMENSIONS																DISCHARGE OPENING				TONNAGE RANGE		WATER INLET		DRAIN OPENING	
MODEL	A	B	C	D	E	F	J	K	L	LL	M	N	P	R	S	T	U	V	W	MIN	MAX	AA	AB	AC	AD
G18	242-5/8	54-3/8	56-3/8	51-1/8	5-1/4	76-3/8	35	79-3/16	121-7/16	162-3/8	28	8	7	4-1/2	30	22	19	9	17-7/8	15 Ton	15 Ton	4-1/2	41-1/8	23-1/2	52-7/8
920	297-7/8	60-7/16	64-3/8	59-1/8	5-1/4	71-3/8	42	104-9/32	158-5/8	208	33	10	11	8	36	24-7/8	24-7/8	11-1/16	19-1/8	15 Ton	15 Ton	4-1/2	41-1/8	28-7/8	52-7/8

V-BANK FILTER

MODEL	FILTER SIZE & QTY
G18	16"x20"x2" (15)
920	20"x25"x2" (12)

LPD CELDEK EVAPORATIVE COOLING UNIT			
TOT. WEIGHT	MEDIA SIZE & QTY	NOZZLES	MAX. FLOW RATE
1975 LBS	38"x43"x12"	35	10.15 GPH
2890 LBS	45"x54"x12"	42	12.6 GPH

OPTIONAL MIXING BOX FILTERS
15"x20"x2" (4), 15"x15"x2" (2)
18"x25"x2" (4), 16"x20"x2" (2)

CONDENSER INFORMATION							
MODEL	WEIGHT*	TONNAGE #1	TONNAGE #2	TONNAGE #3	CC	DD	EE
15 TON-G18	591 LBS	5 TON	5 TON	5 TON	32-13/16	76-3/16	70-7/8
15 TON-920	591 LBS	5 TON	5 TON	5 TON	32-13/16	97-3/16	91-15/16

*ADD CONDENSING UNIT WEIGHT TO WEIGHT IN TABLES ABOVE

** MAX. EVAP. WATER PRESSURE = 50 PSI @ 70 DEG. F

R410A REFRIGERANT